
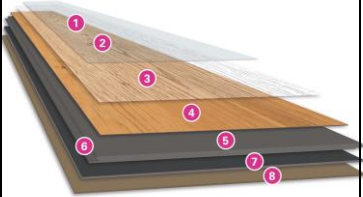












# TECHNICAL CHARACTERISTICS

## wineo 400

Heterogeneous resilient-flooring for glueless installation - Covering type according to EN ISO 10582






# wineo

	wineo 400 wood	wineo 400 wood XL	wineo 400 stone	
<b>Format</b>	1212 x 187 mm	1507 x 235 mm	600 x 316 mm	
<b>Product thickness</b>	4.5 mm	4.5 mm	4.5 mm	
<b>Planks, tiles / m<sup>2</sup> per box</b>	10 / 2.27 m <sup>2</sup>	6 / 2.12 m <sup>2</sup>	12 / 2.28 m <sup>2</sup>	
<b>Boxes / m<sup>2</sup> per pallet</b>	48 / 108.96 m <sup>2</sup>	52 / 110.24 m <sup>2</sup>	48 / 109.44 m <sup>2</sup>	
<b>Guarantee Extended warranty</b>	15 years for private use according to Windmüller warranty conditions - www.wineo.de + 5 years for laying on PU underlay mat			
<b>Classification</b>				<b>Product composition</b>
 <b>Utilization class 23</b> EN ISO 10874	Domestic area with intensive usage		1	<b>Surface seal</b>
 <b>Utilization class 31</b> EN ISO 10874	Commercial sector with low or occasional usage		2	<b>Surface texture</b> Various embossings
Wear layer binder content EN ISO 10582	Typ I		3	<b>Wear layer</b> Thickness 0.3 mm
 <b>R9</b> Anti slip category DIN 51130	R 9		4	<b>Design</b> Decor film
 Staining and chemical resistance EN ISO 26987	Good resistance according to the concentration and residence time		5	<b>Base layer</b> with glass fibre reinforced
 Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6		6	<b>Profile connection</b> Connect technology 
 Residual indentation EN ISO 24343-1	≤ 0.1 mm		7	<b>Backing</b>
 Thermal resistance EN 12667	0.012 (m <sup>2</sup> K)/W without underlay mat 0.022 (m <sup>2</sup> K)/W with silentCOMFORT		8	<b>Underlay material</b> <b>silentCOMFORT</b> (available separately)
 <b>silentCOMFORT</b> Impact sound reduction EN ISO 16251-1	~ 7 dB ~ 16 dB with silentCOMFORT			wood bevelled edge wood XL registered embossed surface, stone bevelled edge real joint
 Dimensional stability EN ISO 23999	~ 0.1 %			
REACH	free from SVHC substances ≥ 0.1 %			
Disposal	<u>Private:</u> Possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203			

**CE** - 18 -


Windmüller GmbH  
Nord-West-Ring 21  
D-32832 Augustdorf

DOP: 0301010  
EN 14041:2004 / AC2006  
1658

www.wineo.de

**ÉMISSIONS DANS L'AIR INTÉRIEUR\***

 **A+**

A+ A B C

Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)

**TÜV PROFI CERT**  
70 716 4061-6  
www.proficert.com

**TFI** emissionsgeprüft  
schadstoffgeprüft  
**PREMIUM**

Phthalat frei  
**factory made coated**

### Relevant information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.