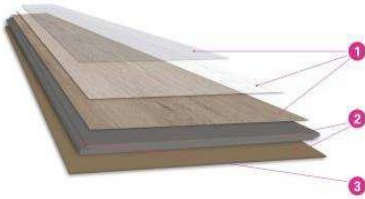


wineo 400 Rigid to click – 2023

Heterogeneous resilient-flooring for glueless installation - Covering type according to DIN EN 16511

wineo

	wood L	wood XL	stone L	
Format	1220 x 180 mm	1522 x 225 mm	610 x 305 mm	
Product thickness	5.5 mm	5.5 mm	5.5 mm	
Planks, tiles / m ² per box	10 / 2.20 m ²	6 / 2.05 m ²	10 / 1.86 m ²	
Boxes / m ² per pallet	48 / 105.60 m ²	52 / 106.60 m ²	60 / 111.60 m ²	
Guarantee	You can find our guarantee conditions at - www.wineo.de			
Classification				Product composition
	Utilization class 23 EN ISO 10874	Domestic area with intensive usage		1 Top element Surface texture, surface seal, wear layer and decor film
	Utilization class 31 EN ISO 10874	Commercial sector with low or occasional usage		
	Wear layer binder content EN ISO 10582	Typ I		2 SPC core board with integrated noise REDUCT underlay mat
 R10	Anti slip category EN 16165	R 10		3 Profile connection LocTec locking 
	Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3		wood L / stone L bevelled edge 4-sides wood XL V-joint 4-sides lacquered
	Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6		  emissionsgeprüft schadstoffgeprüft PREMIUM
	Residual indentation EN ISO 24343-1	≤ 0.2 mm		
	Thermal resistance EN 12667	0.035 (m ² K)/W		
	Impact sound reduction EN ISO 16251-1	~ 19 dB		
	Dimensional stability EN ISO 23999	≤ 0,1%		
	REACH	free from SVHC substances ≥ 0.1 %		
	Disposal	<u>Private:</u> Possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203		
 - 25 -  www.wineo.de Windmüller GmbH Charles-Lindbergh-Ring 13 D-32756 Detmold DOP: 0301013 EN 14041:2004 / AC2006 1658 A+ A+ A B C Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)				
 COMMITTED TO SUSTAINABLE DEVELOPMENT  factory made coated				

Relevant information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.