


TECHNICAL CHARACTERISTICS

wineo 400 Multi-Layer – 2023

Long-lasting multi-layer floor (Multi-Layer) according to DIN EN 16511 for glueless installation

wineo

	wood L	wood XL	stone L
			
Format	1222 x 182 mm	1520 x 230 mm	601 x 310 mm
Product thickness	9 mm	9 mm	9 mm
Planks, tiles / m² per box	9 / 2.00 m²	6 / 2.10 m²	9 / 1.68 m²
Boxes / m² per pallet	44 / 88.00 m²	52 / 109.20 m²	60 / 100.80 m²
Guarantee	You can find our guarantee conditions at - www.wineo.de		

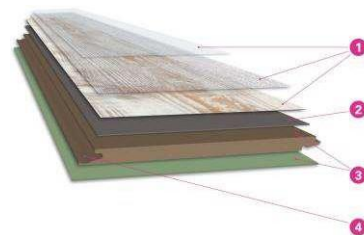

Classification			Product composition	
	Utilization class 23 EN ISO 10874	Domestic area with intensive usage	1	Top element Surface texture, surface seal, wear layer and decor film
	Utilization class 31 EN ISO 10874	Commercial sector with low or occasional usage		
	Wear layer binder content EN ISO 10582	Typ I	2	Base layer
	R10 Anti slip category EN 16165	R 10	3	Core board with integrated soundPROTECT underlay mat
	Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3	4	Profile connection LocTec® locking with profile seal 
	Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6		bevelled edge – 4-sides
	Residual indentation EN ISO 24343-1	≤ 0.2 mm	 vinyl plus COMMITTED TO SUSTAINABLE DEVELOPMENT  factory made coated	
	Thermal resistance EN 12667	≤ 0.058 (m²K)/W		
	Impact sound reduction EN ISO 16251-1	~ 14 dB		
	REACH	free from SVHC substances ≥ 0.1 %		
	Disposal	Private: Possible with normal domestic refuse Commercial: Refuse-key-no. AVV 170203		



Windmüller GmbH
Charles-Lindbergh-Ring 13
D-32756 Detmold

DOP: 0301010
EN 14041:2004 / AC2006
1658

- 25 -







www.wineo.de



volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)



factory made coated

Relevant information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.