
TECHNICAL CHARACTERISTICS

wineo 400 Rigid to click – 2023

Heterogeneous resilient-flooring for glueless installation - Covering type according to DIN EN 16511

wineo

	wood L	wood XL	stone L
Format	1220 x 180 mm	1522 x 225 mm	610 x 305 mm
Product thickness	5.5 mm	5.5 mm	5.5 mm
Planks, tiles / m² per box	10 / 2.20 m²	6 / 2.05 m²	10 / 1.86 m²
Boxes / m² per pallet	48 / 105.60 m²	52 / 106.60 m²	60 / 111.60 m²
Guarantee	You can find our guarantee conditions at - www.wineo.de		

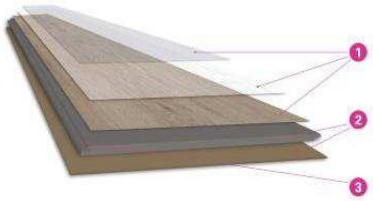

Classification

Utilization class 23 EN ISO 10874	Domestic area with intensive usage
Utilization class 31 EN ISO 10874	Commercial sector with low or occasional usage
Wear layer binder content EN ISO 10582	Typ I
Anti slip category EN 16165	R 10
Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3
Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6
Residual indentation EN ISO 24343-1	≤ 0.2 mm
Thermal resistance EN 12667	0.035 (m²K)/W
Impact sound reduction EN ISO 16251-1	~ 19 dB
Dimensional stability EN ISO 23999	≤ 0,1%
REACH	free from SVHC substances ≥ 0.1 %
Disposal	Private: Possible with normal domestic refuse Commercial: Refuse-key-no. AVV 170203

Product composition

1	**Top element** Surface texture, surface seal, wear layer and decor film
2	**SPC core board** with integrated noise REDUCT underlay mat
3	**Profile connection** LocTec locking
	wood L / stone L bevelled edge 4-sides wood XL V-joint 4-sides lacquered

TÜV PROFI CERT product 70 710 4061-6 www.proficert.com
emissionsgeprüft schadstoffgeprüft
PREMIUM

CE
- 25 -
Windmöller GmbH
Charles-Lindbergh-Ring 13
D-32756 Detmold
DOP: 0301013
EN 14041:2004 / AC2006
1658
Bfl-s1 DS E1 HCHO ≥ 0,10 W/(mK)
www.wineo.de

ÉMISSIONS DANS L'AIR INTÉRIEUR
A+
A+ A B C
Information representative des emissions dans l'air interieur des substances volatiles presentant un risque de toxicite par inhalation, sur une echelle de classe allant de C (fortes emissions) a A+ (tres faibles emissions)

Phthalat frei Phthalate free

factorymade coated

Relevant information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmöller GmbH.