


TECHNICAL CHARACTERISTICS

wineo 800 Multi-Layer - 2025



Long-lasting multi-layer floor (Multi-Layer) according to DIN EN 16511 for glueless installation

	wood XL
Format	1520 x 230 mm
Product thickness	9,0 mm
Weight	9,6 kg/m ²
Planks / m² per box	6 / 2,10 m ²
Boxes / m² per pallet	52 / 109,20 m ²
Guarantee	You can find our guarantee conditions at – www.wineo.de

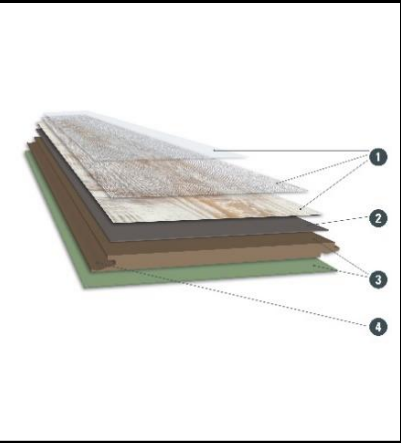

Classification			Product composition	
	Utilization class 23 EN ISO 10874	Domestic area with intensive usage	1	Top element Surface texture, surface seal, wear layer and decor film
	Utilization class 33 EN ISO 10874	Commercial sector with heavy usage		
	Wear layer binder content EN ISO 10582	Typ I		
	R10 Anti slip category EN 16165	R 10	2	Base layer
	Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3	3	Core board with integrated soundPROTECT underlay mat
	Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6		
	Residual indentation EN ISO 24343-1	≤ 0,2 mm	4	Profile connection LocTec® locking with profile seal
	Thermal resistance EN 12667	≤ 0,058 (m ² K)/W		
	Impact sound reduction EN ISO 16251-1	~ 14 dB		bevelled edge – 4-sides
	REACH	free from SVHC substances ≥ 0,1 %		
	Disposal	Private: Possible with normal domestic refuse Commercial: Refuse-key-no. AVV 170203		

CE - 18 -

Windmüller GmbH
Nord-West-Ring 21
D-32832 Augustdorf

DOP: 0301010
EN 14041:2004 / AC2006
1658

www.wineo.de

ÉMISSIONS DANS L'AIR INTÉRIEUR*

Information représentative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)

TÜV PROFICERT
produit

70 710 4061-3
www.proficert.com

TRI emissionsgeprüft
schadstoffgeprüft
PREMIUM

Phthalat frei
Phthalate free

vinyl plus
COMMITTED TO SUSTAINABLE DEVELOPMENT

factory made coated

Relevant information:

- Underfloor heating
Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.