
TECHNICAL CHARACTERISTICS

wineo 800 Multi-Layer - 2025

Long-lastig multi-layer floor (Multi-Layer) according to DIN EN 16511 for glueless installation

	wood XL
Format	1520 x 230 mm
Product thickness	9,0 mm
Weight	9,6 kg/m²
Planks / m² per box	6 / 2,10 m²
Boxes / m² per pallet	52 / 109,20 m²
Guarantee	You can find our guarantee conditions at – www.wineo.de

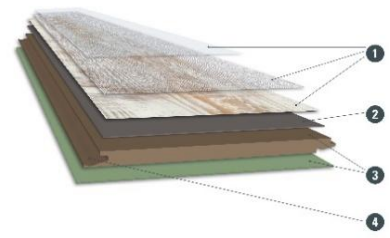

Classification			Product composition	
	Utilization class 23 EN ISO 10874	Domestic area with intensive usage	**1**	**Top element** Surface texture, surface seal, wear layer and decor film
	Utilization class 33 EN ISO 10874	Commercial sector with heavy usage		
	Wear layer binder content EN ISO 10582	Typ I		
R10	Anti slip category EN 16165	R 10	**2**	**Base layer**
	Resistance to staining EN 438	Group 1 + 2: grade 4 Group 3: grade 3	**3**	**Core board** with integrated soundPROTECT underlay mat
	Light fastness EN ISO 105-B02	Light fastness (procedure 2) ≥ 6		
	Residual indentation EN ISO 24343-1	≤ 0,2 mm	**4**	**Profile connection** LocTec® locking with profile seal
	Thermal resistance EN 12667	≤ 0,059 (m²K)/W		
	Impact sound reduction EN ISO 16251-1	~ 14 dB		bevelled edge – 4-sides
	REACH	free from SVHC substances ≥ 0,1 %		
	Disposal	Private: Possible with normal domestic refuse Commercial: Refuse-key-no. AVV 170203		

CE
- 25 -
Windmöller GmbH
Charles-Lindbergh-Ring 13
D-32756 Detmold
DOP: 0301010
EN 14041:2004 / AC2006
1658
Bfl-s1 DS E1 HCHO ≤ 2 kV ≥ 0,15 W/(mK)
www.wineo.de

ÉMISSIONS DANS L'AIR INTÉRIEUR*
A+
A+ A B C
Information représentative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)

TÜV PROFI CERT product
70 710 4061-3
www.proficert.com
TFI emissionsgeprüft schadstoffgeprüft
PREMIUM

Phthalat frei · Phthalate free

factorymade coated

Relevant information:

- Underfloor heating
  Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27° C.
- Cleaning and care: see separate cleaning & care instruction.
- Technical subjects can be changed by Windmöller GmbH.