

Laminate flooring with system

Rock'n 'Go



wineo laminate flooring with system is a high-quality floor covering coated with melamine resin with integrated self-adhesive impact sound mat for adhesive fixation on all subfloors ready for installation. Laminate flooring with system from wineo has exceptional resistance to moisture thanks to Aqua-Stop profile sealing. For more information, please refer to the technical specifications in our product collections.

Important general information

Always store **wineo laminate flooring with system** in a dry place. The packaging film is no substitute for a dry storage location and does not provide permanent protection against moisture.

Before installation, make sure that the delivered product is in perfect condition; cut or installed goods are excluded from complaints. Before laying, check the goods for color and batch uniformity. Only install tiles or planks of the same batch in the same room. The relevant national standards, guidelines, and regulations as well as the technical references and recognized rules of the trade apply to the installation of wineo laminate flooring with system.

Substrate condition

The substrate must be level, load-bearing and permanently dry. The maximum height tolerance must not be exceeded 3mm per linear meter or, in the case of tile edges, 1mm per 10cm. Textile floor coverings and needle fleece must be removed. Basically, the removal of old floor coverings is recommended. To achieve optimum adhesion, we recommend precoating all mineral substrates with a suitable dispersion primer.

Substrates

wineo laminate flooring with system can be laid on all types of screeds, on existing V 100 chipboard and OSB boards and, after consultation, also on existing primed homogeneous PVC and linoleum coverings, stone, ceramic and marble floors. Note: Existing floor coverings must be checked in advance for suitability (e.g., firm connection to the substrate, etc.). Basically, the removal of old floor coverings is recommended to counteract interactions and irritations.

Note: The flooring installer shall raise concerns during his inspection prior to installation of the flooring.

In particular in the case of:

- major unevenness,
- cracks in the subfloor,
- insufficiently dry subfloor,
- insufficiently firm, too porous and too rough surface of the subfloor,
- contaminated surface of the substrate, e.g. by oil, wax, varnish, paint residues,
- incorrect height of the surface of the substrate in relation to the height of adjacent components,
- unsuitable temperature of the substrate,
- unsuitable room climate,
- missing heating protocol in case of heated floor constructions,
- missing protrusion of the edge insulation strip,
- missing marking of measuring points in case of heated floor constructions
- missing joint plan

Underfloor heating:

When laying laminate flooring, EN 1264-2 (underfloor heating systems and components) must be taken into account. The surface temperature should not exceed 27°C permanently. If other underfloor heating systems are used, please consult the application engineering department of Windmüller GmbH.

Laminate flooring with system Rock'n 'Go



Tools for laying (1):

- folding rule / tape measure
- spacer
- pencil / parallel tracer
- angle
- punch / jigsaw



Acclimatization (2):

The wineo laminate flooring with system should be acclimatized lying down for at least 24-48 hours before installation, unopened in small stacks of max. 3 packages, in the rooms to be installed or adjacent rooms under the following conditions!

Room climatic conditions:

- Room air temperature > 18°C (but not more than 26°C).
- Floor temperature > 15°C (but not more than 25°C)
- Relative humidity should be between 50% and 65% max.



Laminate flooring with system Rock'n 'Go



The installation of wineo laminate flooring with system


Movement joint / edge distances:

Movement joint: at least 10mm wide.

Tip: Use leftover pieces of the flooring as spacers. Also observe a distance of 10mm to all fixed objects in the room, such as pipe ducts, door frames, etc.! This movement joint must not be covered with silicone, electric cables or similar!

Lay the panels with the front side facing the main light source of the room. You can significantly improve the inherent stability of the installed floor by laying long, narrow rooms lengthwise. Always work from left to right in the installation area. In doing so, the tongue sides of the panels face the wall.

We recommend that you transfer the dimensions (3) of the first two rows of panels, including the edge distance, to the subfloor by means of a chalk line (4). Now start with a whole panel in the second row, remove the protective foil (5) and lay the element along the pre-drawn stop (6).


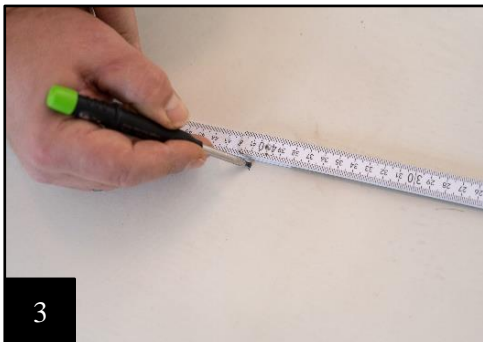


Laminate flooring with system Rock'n 'Go



To ensure a right-angled installation, we recommend that you complete the first two rows with the prescribed head joint offset of at least 30cm (7). Make sure that the head joints with tongue and groove fit exactly on top of each other and lock them with light pressure until they snap into place (8).

Now mark (9) the element to be inserted at the end of the room and cut (10) it to fit exactly so that the edge distance (11) of at least 10mm is ensured.

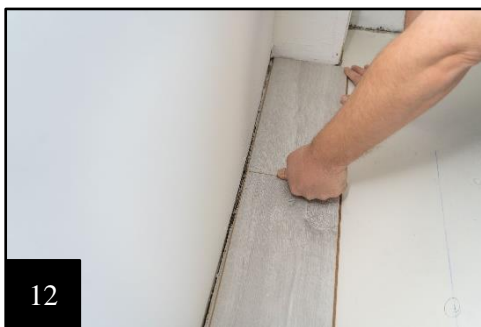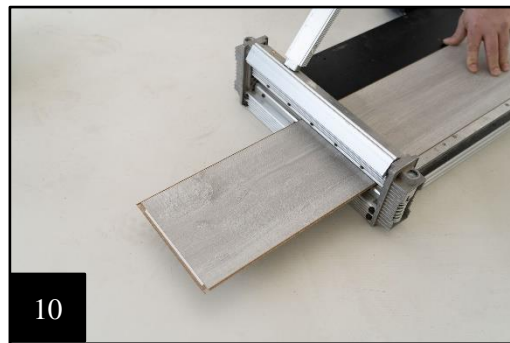

To lay the subsequent rows, place the remaining panel of the first row, at least 30cm long, in the longitudinal groove of the row already lying flat at an angle of approx. 30° and lower it against the front row with slight pressure. Take the following panel, guide it lengthwise at an angle of also 30° into the panel already lying flat on the floor, bringing it as close as possible to the head of the previously laid panel and locking it in place as described above. If necessary, an installation aid can be used. This technique is used to lay the entire remaining row and remaining surfaces. To lay the last row, measure the distance between the wall and the laid row and transfer it to the panel.

If possible, the last laying row should correspond to half a panel width. Remember about the 10mm wide movement joint.

Laminate flooring with system Rock'n 'Go



Movement profiles in the surface

Rooms with an uninterrupted area of 150m² can be laid without joints, taking into account the double edge distance (approx. 10mm). A side length of approx. 12.50m should not be exceeded. In apartments up to 100m² living space with several rooms, transition profiles in doorways can be dispensed with in the case of continuous installation. In larger apartments, suitable transition profiles or permanently elastic spray cork compounds may have to be used. The joint width should be at least 10 mm. Building joints as well as movement joints in heating screeds, between heating circuits that can be regulated differently, must be incorporated into the surface covering.

When installing baseboards, transition or end profiles, it must be taken into account that the baseboards or profiles must never be fastened to the floor covering!

Finishing work

- Remove all spacer blocks.
- Movement joints are to be taken over with suitable profiles, pipe penetrations are to be sealed with rosettes or a suitable filling cord and joint sealant.

Please note that the contractor has a maintenance obligation (protection of the floor covering from damage by subsequent trades) for a completed but not yet accepted trade. Through partial acceptance, the maintenance obligation for the accepted areas is transferred to the client.

Chair, table, and furniture feet must be protected with suitable protective glides or pads. These are available, for example, from Wagner System GmbH, www.wagner-system.de or magiGLIDE www.magiglide.de. As a preventive measure, light-colored, migration-free furniture glides should be used if possible.

Only use soft suitable chair and furniture castors.

Chair castors and chair and furniture glides must be maintained regularly. Contact surfaces of chair and furniture glides must lie flat and be rounded at the edges. Metal glides can corrode in conjunction with moisture and cause stains.

Cleaning and maintenance

Please refer to our detailed cleaning and detergent recommendations at www.wineo.de!

These instructions do not claim to be complete. Further information or instructions for individual installation are available on request.

With the publication of these installation instructions (as of 12/2021), all previous versions lose their validity.