
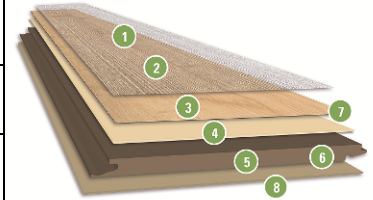














TECHNICAL CHARACTERISTICS


wineo 1000 wood XXL Multi-Layer to click in Long-lasting multi-layer flooring according to ISO 20326 for glueless installation

wineo

| | |
|---|---|
|  | wineo 1000 wood XXL Multi-Layer to click in |
| Format | 1845 x 237 mm |
| Product thickness | 9 mm |
| Weight | 8.70 kg/m ² |
| Planks / m² per box | 5 / 2.19 m ² |
| Boxes / m² per pallet | 48 / 105.12 m ² |
| Guarantee | 10 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de |








| Classification | | Product composition | |
|---|--|---|---|
|  | Utilization class 23 EN ISO 10874 | Heavy-duty use in the domestic area | 1 Surface texture Various embossings |
|  | Utilization class 32 EN ISO 10874 | Normal use in the commercial sector | 2 Top layer Polyurethane |
|  | Anti slip category DIN 51130 | R 9 | 3 Decor Decor paper |
|  | Staining and chemical resistance EN ISO 26987 | Very good resistance according to the concentration and residence time | 4 Base layer Polyurethane |
|  | Light fastness EN ISO 105-B02 | ~ 7 | 5 Core board Aqua-Protect® |
|  | Residual indentation EN ISO 24343-1 | ~ 0.05 mm | 6 Profile connection • LocTec® technology  • Fold-Down locking short side  |
|  | Castor chair test EN 425 | 25000 revolutions no damage with rolls type W | |
|  | Thermal resistance EN 12667 | 0.06 (m ² K)W | 7 Authentic joint design V4  |
|  | Impact sound reduction EN ISO 10140 | ~ 15 dB | 8 Insulation mat Sound-Protect Eco |
| | Reflected walking sound reduction | ~ 29 % | |
| | Disposal | <u>Private:</u> possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203 | |



Windmüller GmbH
Nord-West-Ring 21
D-32832 Augustdorf

DOP: 0101010
EN 14041:2004 / AC2006
1658

- 18 -

www.wineo.de

ÉMISSIONS DANS L'AIR INTÉRIEUR



Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)

TÜV PROFICERT

70 710 4061-5
www.proficert.com

tested for emissions, harmful substances

PREMIUM

Relevant Information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.