
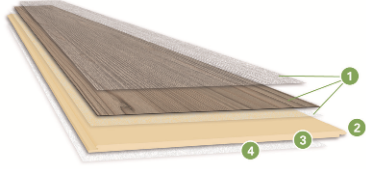






























TECHNICAL CHARACTERISTICS

PURLINE ORGANIC FLOORING | wineo 1000 to click

Permanently elastic polyurethane flooring according to EN 16776
free of chlorine, solvents and plasticizers

wineo

 to click	wineo 1000 wood	wineo 1000 stone	
Format	1295 x 195 mm	859 x 397 mm	
Product thickness	5 mm	5 mm	
Weight	9 kg/m ²	9 kg/m ²	
Planks / m² per box	8 / 2.02 m ²	6 / 2.05 m ²	
Boxes / m² per pallet	48 / 96.96 m ²	48 / 98.40 m ²	
Guarantee	10 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de		
Classification			
 Utilization class 23 EN ISO 10874	Heavy-duty use in the domestic area		1 Top element <ul style="list-style-type: none"> • PU-top layer with surface structure • decor paper • stabilisation with ecuran
 Utilization class 32 EN ISO 10874	Normal use in the commercial sector		
 R9 Anti slip category DIN 51130	R 9		
 Staining and chemical resistance EN ISO 26987	Very good resistance according to the concentration and residence time		2 Profile connection Connect technology 
 Light fastness EN ISO 105-B02	~ 7		3 Base layer ecuran high performance composite material
 Residual indentation EN ISO 24343-1	~ 0.05 mm		
 Effect of a furniture leg EN 424	Foot type 0 – no visible change		4 Backing Integrated Fleece TEC-System
 Castor chair test EN 425	25000 revolutions no damage with rolls type W		 www.blauer-engel.de/uz120       
 Thermal resistance ISO 8302	0.01 (m ² K)/W		
 Impact sound reduction EN ISO 10140	~ 6 dB		
 Dimension stability EN ISO 23999	~ 0.10 %		
Disposal	Private: possible with normal domestic refuse Commercial: Refuse-key-no. AVV 170203		
 Windmüller GmbH Nord-West-Ring 21 D-32832 Augustdorf DOP: 2001010 EN 14041:2004 / AC2006 1658      ≤ 2 kV ≥ 0,25 W/(mK) www.wineo.de			
 Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)			
 DGNB NAVIGATOR Registrations-Code NAPCCU www.dgnb-navigator.de			

Relevant Information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperatur of 27 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.