


TECHNICAL CHARACTERISTICS


PURLINE ORGANIC FLOORING wineo 1500 acoustic










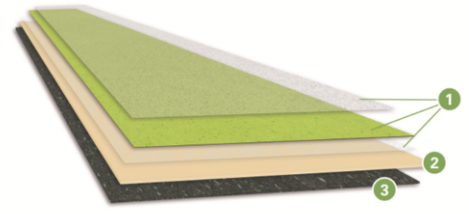



Permanently elastic polyurethane flooring according to EN 16776 with an integrated insulation mat for an improved impact sound reduction free of chlorine, solvents and plasticizers

wineo


PURLINE organic flooring wineo 1500 acoustic is suitable especially for highly frequented areas with a high demand to a low noise level such as hospitals, schools or office buildings.

Format 	20 x 2 m
Product thickness	4 mm
Weight	4.2 kg/m ²
Roll	1 / 40 m ²
Rolls / m² per pallet	6 / 240 m ²
Guarantee	10 years – Guarantee for private use according to Windmüller warranty conditions – www.wineo.de








Classification		Product composition	
	Utilization class 23 EN ISO 10874	Heavy-duty use in the domestic area	1
	Utilization class 34 EN ISO 10874	Very heavy-duty use in the commercial sector	
	Utilization class 41 EN ISO 10874	Medium use in the light industrial sector	
	Anti slip category DIN 51130	R 9	2
	Staining and chemical resistance EN ISO 26987	Resistant (detailed list available on request)	
	Light fastness EN ISO 105-B02	~ 7	3
	Residual indentation EN ISO 24343-1	~ 0.15 mm	
	Effect of a furniture leg EN 424	Foot type 0 – no visible change	
	Castor chair test EN 425	25000 revolutions no damage with rolls type W	
	Thermal resistance ISO 8302	~ 0.041 (m ² K)/W	
	Impact sound reduction EN ISO 10140	~ 17 dB	
	Dimension stability EN ISO 23999	~ 0.10 %	
	Flexural behaviour EN ISO 24344	< 20 mm	
	Disposal	<u>Private:</u> possible with normal domestic refuse <u>Commercial:</u> Refuse-key-no. AVV 170203	

- Top element**
- PU-top layer with surface structure
 - decor paper
 - stabilisation with ecuran
- Base layer**
- ecuran
high performance composite material
- Insulation mat**
- Integrated insulation mat acoustic




Windmüller GmbH
Nord-West-Ring 21
D-32832 Augustdorf

DOP: 2201010
EN 14041:2004 / AC2006
1658

www.wineo.de

ÉMISSIONS DANS L'AIR INTÉRIEUR



Information représentative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)

TÜV PROFICERT

70 710 3788-5
www.proficert.com

tested for emissions, harmful substances

PREMIUM

Relevant Information:

- Installation in utilization class 41 possible (vehicular traffic excluded), but requires the consultation of the Application Engineering of wineo.
- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperatur of 27 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.