


TECHNICAL CHARACTERISTICS

PURLINE | wineo 1500 roll | roll to glue
 Permanently elastic polyurethane flooring according to EN 16776
 free of chlorine, solvents and plasticizers

wineo

	chip ∞	wood ∞	fusion ∞
Format	20 x 2 m	20 x 2 m	20 x 2 m
Product thickness	2.5 mm	2.5 mm	2.5 mm
Weight	3.45 kg/m ²	3.45 kg/m ²	3.45 kg/m ²
Roll / m²	1 / 40 m ²	1 / 40 m ²	1 / 40 m ²
Rolls / m² per pallet	6 / 240 m ²	6 / 240 m ²	6 / 240 m ²
Guarantee	You can find our guarantee conditions at – www.wineo.de		

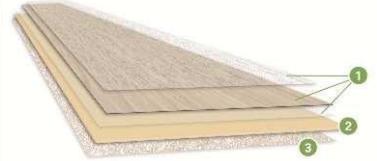

Classification		Product composition
	Utilization class 23 EN ISO 10874	1 Top element <ul style="list-style-type: none"> • PU-top layer with surface structure • decor paper • stabilisation
	Utilization class 34 EN ISO 10874	
	Utilization class 43 EN ISO 10874	
	Scratch resistance EN 16776, annex A	2 Base layer high performance composite material
	Anti slip category bfu R 9729	
	Anti slip category DIN 51130	3 Backing Integrated Fleece TEC-System
	Staining and chemical resistance EN ISO 26987	
	Light fastness EN ISO 105-B02	
	Residual indentation EN ISO 24343-1	
	Effect of a furniture leg EN 424	
	Castor chair test ISO 4918	
	Thermal resistance ISO 8302	
	Impact sound reduction EN ISO 10140	
	Dimension stability EN ISO 23999	
	Flexural behaviour EN ISO 24344	
	REACH	
	Disposal	





Windmüller GmbH
Charles-Lindbergh-Ring 13
D-32756 Detmold

DOP: 2101010
EN 14041:2004 / AC2006
1658

- 25 -



www.wineo.de



Information representative des émissions dans l'air intérieur des substances volatiles présentant un risque de toxicité par inhalation, sur une échelle de classe allant de C (fortes émissions) à A+ (très faibles émissions)



REGISTRATION-CODE
NAPCCU
www.dgnb-navigators.de



THIRD-PARTY VERIFIED
EPD
Institut Bauen und Umwelt eV

Relevant Information:

- Underfloor heating: Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 29 °C.
- Cleaning and care: See separate cleaning & care instruction.
- Technical subjects can be changed by Windmüller GmbH.