

WINEO DRYBACK HERRINGBONE INSTALLATION INSTRUCTIONS

These installation guidelines describe the detailed method of the herringbone pattern of Wineo Dryback flooring. Herringbone pattern is aligned parallel to the wall and centered in the room.

General installation instructions, such as acclimatization, subfloor preparation, etc. for the respective products are deliberately not provided. In addition, please download the general installation instructions for your Wineo Dryback product to be installed from our homepage.


Subfloor:

The subfloor should be given special consideration for a design installation. Particular attention should be paid to the subfloor evenness, as this can have a negative influence on the installation pattern. A subfloor that is not leveled according to (DIN 18202, Table 3, line 4) increased requirements, can result in gaps and pattern offsets.

Preparation:

To be able to lay a herringbone pattern perfectly in the room, we recommend measuring and drawing five guidelines to be able to align and lay the first bridge to it.

To do this, we first determine the center of the room in the direction of installation of the pattern to be laid. This is marked with a chalk line to ensure an exactly straight line through the room.



Since the center of the herringbone does not run through the corner of a plank, the displacement dimension (V) and the deck width (D) must now be determined.

Displacement dimension: $V = a * 1.414 / 4$

Deck width: $D = b / 1.414$

Example plank:


$$V = (\text{plank width } a) * 1.414 / 4$$


$$= 80\text{mm} * 1.414 / 4 = 28,28\text{mm}$$

$$D = (\text{plank length } b) / 1.414$$

$$= 480\text{mm} / 1.414 = 339,46\text{mm}$$

Mark the two dimensions according to the drawing and mark them again with the help of a chalk line.

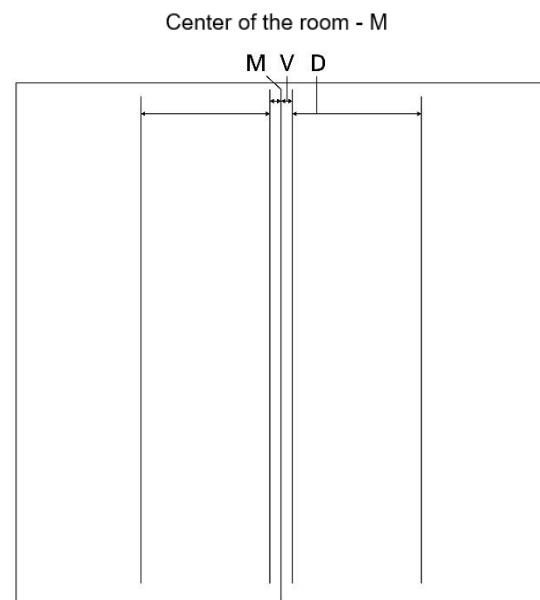

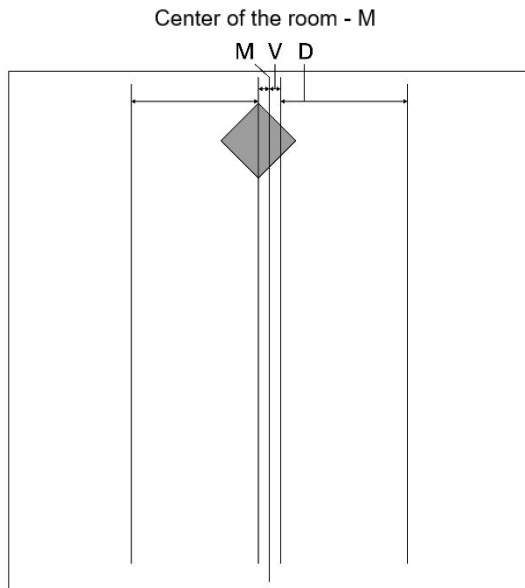

Now you need a square elastic flooring tile (this must be exact) as a laying aid to be able to lay the planks easily. This is placed with the opposite tips on one of the two displacement dimension lines and temporarily fixed using double-sided adhesive tape.


Installation:


Apply the adhesive according to the processing instructions starting from the auxiliary square. The planks are laid alternately starting at the auxiliary square and with the tips along the auxiliary lines tightly, butt-jointed and tension-free. See picture

At the end of the row, the ends are trimmed according to the edge distance.

The auxiliary square is now removed and the area also filled as described. The adhesive in the remaining triangles is removed with a hand scraper.

Do not forget to roll!!!

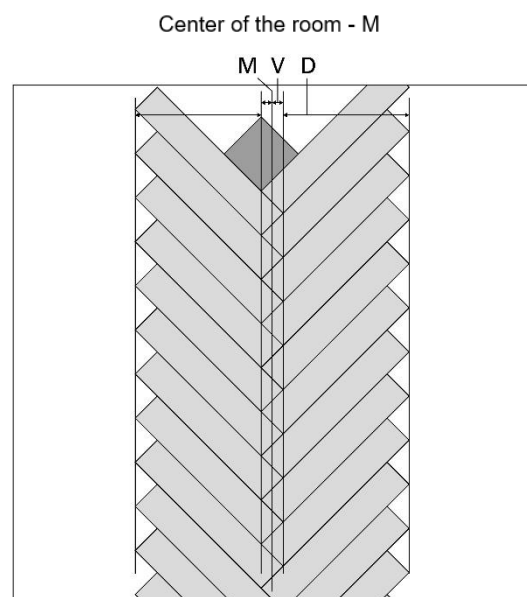


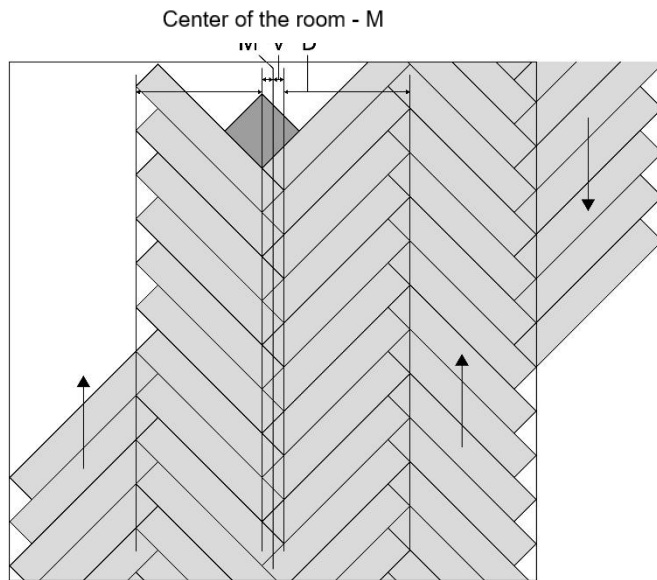

When the first bridge is in place and checked for straightness, you can now start filling the areas on the right and left.

To do this, draw the cover widths again and fill the area from bottom to top and top to bottom alternately. See picture.

Roll on after each row!

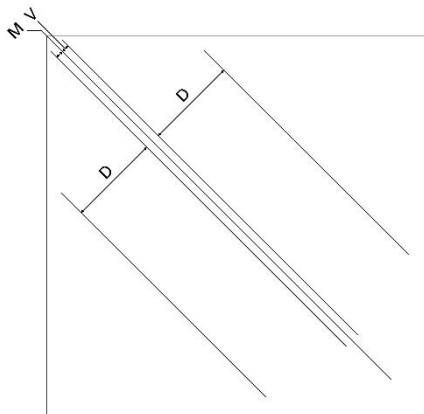

For the variants at 45° to the wall, the five auxiliary lines are drawn at the start from a corner at 45°. See picture.

HERRINGBONE INSTALLATION INSTRUCTIONS

If you want to lay a variant with a border, this is marked before laying and recessed with adhesive. After laying the herringbone, the surface is shortened along the border line by means of a straight edge and then the edge is filled with the desired border planks.

Do not forget to roll the planks here as well.

