
wineo
PURE
DESIGN FLOORING

CONTENTS

Product advantages	04
wineo 400	06
wineo 600	18
wineo 800	30
Product composition	44
Accessories	48
Awards & Quality	49
Service	50
Technical characteristics	52

Comfort Oak Nature



PRODUCT ADVANTAGES

DURABLE
The product composition and the special surface finish make the design floor extremely durable.
It can easily withstand heavy wear and tear.

HIGH COMFORT
The design flooring is kind to joints, warm to the feet, with excellent walking and standing support.
Installed on underfloor heating, the design flooring conveys an extra sense of cosy warmth.

EASY CARE
Thanks to the sealed surface, the design flooring is stain-resistant
and easy to clean.

SUITABLE FOR HIGH HUMIDITY AREAS
All wineo design floorings are perfectly suitable
for high humidity rooms such as the kitchen or bathroom.

QUIET
The elastic surface reduces walking noise
and provides pleasant room acoustics.

SLIP-RESISTANT
The proven slip-resistant surface provides safety with every step.



Authentic Oak Brown

wineo 400

3-in-1

LIVE AS YOU ARE

Live the way you imagine it
and find the style that suits you.

The wineo 400 offers
four inspiring trends,
a variety of designs and
different formats.

This is the perfect foundation
to design your home according
to your individual taste.
From XS to XL, from light to dark,
from calm to rustic –
the wineo 400 is as individual
as you are!

Let yourself be inspired
and find your own style!

Learn more about wineo 400!

wineo 400 wood XS | wood L | wood XL

Installation type: Glue | Elastic
Wear layer: 0.3 mm
Planks / box: 24 / 1.79 m² | 18 / 3.89 m² | 12 / 4.24 m²

610 × 122 × 2 mm XS
1200 × 180 × 2 mm L
1505 × 235 × 2 mm XL

Installation type: Click | Rigid
Wear layer: 0.3 mm
Planks / box: 10 / 2.20 m² | 6 / 2.05 m²

1220 × 180 × 5,5 mm L
1522 × 225 × 5,5 mm XL

Installation type: Click | Multi-Layer | Rigid
Wear layer: 0.3 mm
Planks / box: 9 / 2.00 m² | 6 / 2.10 m²

1222 × 182 × 9 mm L
1520 × 230 × 9 mm XL

wineo 400 stone L

Installation type: Glue | Elastic
Wear layer: 0.3 mm
Tiles / box: 16 / 2.98 m²

610 × 305 × 2 mm L

Installation type: Click | Rigid
Wear layer: 0.3 mm
Tiles / box: 10 / 1.86 m²

610 × 305 × 5,5 mm L

Installation type: Click | Multi-Layer | Rigid
Wear layer: 0.3 mm
Tiles / box: 9 / 1.68 m²

601 × 310 × 9 mm L



Plain Oak Beige

FASCINATION HERRINGBONE

For each trend a highlight

wineo 400 relax

relax



Comfort Oak Nature



Easy Oak Greige
Registered embossed surface

Glue: DB288WXL | **Click:** RLC288WXL
Click (Multi-Layer): MLD288WXL



Nordic Maple Cream
Rough wood structure

Glue: DB289WXL | **Click:** RLC289WXL
Click (Multi-Layer): MLD289WXL



Calm Ash Beige
Rough wood structure

Glue: DB290WXL | **Click:** RLC290WXL
Click (Multi-Layer): MLD290WXL



Comfort Oak Nature
Registered embossed surface

Glue: DB291WXL | **Click:** RLC291WXL
Click (Multi-Layer): MLD291WXL



Balanced Oak Lightgrey
Registered embossed surface

Glue: DB286WXS



Balanced Oak Lightgrey
Registered embossed surface

Glue: DB286WL | **Click:** RLC286WL
Click (Multi-Layer): MLD286WL



Coast Pine Greige
Rough wood structure

Glue: DB280WL | **Click:** RLC280WL
Click (Multi-Layer): MLD280WL



Craft Concrete Grey
Travertine

Glue: DB302SL | **Click:** RLC302SL
Click (Multi-Layer): MLD302SL



Comfort Oak Nature

wineo 400 breathe



Plain Oak Beige



Plain Oak Beige **Glue:** DB281WXS
Registered embossed surface



Plain Oak Beige **Glue:** DB281WL | **Click:** RLC281WL
Registered embossed surface **Click (Multi-Layer):** MLD281WL



Shadow Oak Nature **Glue:** DB292WXL | **Click:** RLC292WXL
Registered embossed surface **Click (Multi-Layer):** MLD292WXL



Country Oak Nature **Glue:** DB294WXL | **Click:** RLC294WXL
Registered embossed surface **Click (Multi-Layer):** MLD294WXL



Vibrant Oak Beige **Glue:** DB282WL | **Click:** RLC282WL
Registered embossed surface **Click (Multi-Layer):** MLD282WL



Industrial Concrete Grey **Glue:** DB303SL | **Click:** RLC303SL
Travertine **Click (Multi-Layer):** MLD303SL



Comfort Oak Brown **Glue:** DB293WXL | **Click:** RLC293WXL
Registered embossed surface **Click (Multi-Layer):** MLD293WXL



Joy Oak Tender **Glue:** DB126WXL | **Click:** RLC126WXL
Registered embossed surface **Click (Multi-Layer):** MLD126WXL



Plain Oak Beige

wineo 400 play

play



Authentic Oak Brown



Limed Oak Silver
Registered embossed surface
Glue: DB301WXL | **Click:** RLC301WXL
Click (Multi-Layer): MLD301WXL



Authentic Oak Brown
Registered embossed surface
Glue: DB296WXL | **Click:** RLC296WXL
Click (Multi-Layer): MLD296WXL



Vintage Oak Brown
Registered embossed surface
Glue: DB297WXL | **Click:** RLC297WXL
Click (Multi-Layer): MLD297WXL



Comfort Oak Taupe
Registered embossed surface
Glue: DB300WXL | **Click:** RLC300WXL
Click (Multi-Layer): MLD300WXL



Vivid Oak Nature
Registered embossed surface
Glue: DB283WXS



Vivid Oak Nature
Registered embossed surface
Glue: DB283WL | **Click:** RLC283WL
Click (Multi-Layer): MLD283WL



Coast Pine Taupe
Rough wood structure
Glue: DB284WL | **Click:** RLC284WL
Click (Multi-Layer): MLD284WL



Industrial Concrete Dark
Travertine
Glue: DB304SL | **Click:** RLC304SL
Click (Multi-Layer): MLD304SL



Authentic Oak Brown

wineo 400 lounge



Comfort Oak Dark



Comfort Oak Mellow
Registered embossed surface

Glue: DB129WXL | **Click:** RLC129WXL
Click (Multi-Layer): MLD129WXL



Shadow Oak Brown
Registered embossed surface

Glue: DB295WXL | **Click:** RLC295WXL
Click (Multi-Layer): MLD295WXL



Cool Walnut Dark
Rough wood structure

Glue: DB298WXL | **Click:** RLC298WXL
Click (Multi-Layer): MLD298WXL



Comfort Oak Dark
Registered embossed surface

Glue: DB299WXL | **Click:** RLC299WXL
Click (Multi-Layer): MLD299WXL



Balanced Oak Brown
Registered embossed surface

Glue: DB285WXS



Balanced Oak Brown
Registered embossed surface

Glue: DB285WL | **Click:** RLC285WL
Click (Multi-Layer): MLD285WL



Balanced Oak Grey
Registered embossed surface

Glue: DB287WL | **Click:** RLC287WL
Click (Multi-Layer): MLD287WL



Timeless Slate Dark
Travertine

Glue: DB305SL | **Click:** RLC305SL
Click (Multi-Layer): MLD305SL



Comfort Oak Dark



wineo 600

CONFIDENT IN STYLE. LEAD THE WAY.

Standing out in style while staying low on the ground.
The XL formats and trendy designs of wineo 600 are inspiring.
New York, London or Sydney – plenty of elegant styles for living and working with flair. And, with the click version wineo 600 rigid, every new look can be realised in no time at all.

Choose from 18 wood designs and 6 stone looks for gluing and clicking in – both versions are quick and easy to install. With a wear layer of 0.4 mm, the wineo 600 is perfect for both private homes and smaller commercial buildings.

Find out everything about rigid!

wineo 600 wood L | wood XL

Installation type: Glue | Elastic
Wear layer: 0,4 mm
Planks / box: 18 / 3,89 m² | 12 / 4,24 m²

1200 × 180 × 2 mm L
1505 × 235 × 2 mm XL

Installation type: Click | Semi-Rigid
Wear layer: 0,4 mm
Planks / box: 8 / 1,80 m² | 6 / 2,12 m²

1212 × 186 × 5 mm L
1507 × 234 × 5 mm XL

wineo 600 stone XL

Installation type: Glue | Elastic
Wear layer: 0,4 mm
Tiles / box: 12 / 5,01 m²

914 × 457 × 2 mm XL

Installation type: Click | Semi-Rigid
Wear layer: 0,4 mm
Tiles / box: 6 / 2,14 m²

746 × 477 × 5 mm XL



wineo 600 wood L

#Place



#NaturalPlace **Glue:** DB183W6
Exclusive wood structure **Click:** RLC183W6



#WarmPlace **Glue:** DB184W6
Exclusive wood structure **Click:** RLC184W6



#SmoothPlace **Glue:** DB185W6
Exclusive wood structure **Click:** RLC185W6



#CozyPlace **Glue:** DB186W6
Exclusive wood structure **Click:** RLC186W6



#ElegantPlace **Glue:** DB187W6
Exclusive wood structure **Click:** RLC187W6



#ModernPlace **Glue:** DB188W6
Exclusive wood structure **Click:** RLC188W6



#WarmPlace

wineo 600 wood XL

#Loft



#CopenhagenLoft
Registered embossed surface

Glue: DB189W6
Click: RLC189W6



#MilanoLoft
Registered embossed surface

Glue: DB190W6
Click: RLC190W6



#BarcelonaLoft
Registered embossed surface

Glue: DB191W6
Click: RLC191W6



#LisbonLoft
Registered embossed surface

Glue: DB192W6
Click: RLC192W6



#LondonLoft
Registered embossed surface

Glue: DB193W6
Click: RLC193W6



#SydneyLoft
Registered embossed surface

Glue: DB194W6
Click: RLC194W6



#LisbonLoft

wineo 600 wood XL

#Loft



#AmsterdamLoft **Glue:** DB195W6
Registered embossed surface **Click:** RLC195W6



#ViennaLoft **Glue:** DB196W6
Registered embossed surface **Click:** RLC196W6



#NewYorkLoft **Glue:** DB197W6
Registered embossed surface **Click:** RLC197W6



#MoscowLoft **Glue:** DB198W6
Registered embossed surface **Click:** RLC198W6



#ParisLoft **Glue:** DB199W6
Registered embossed surface **Click:** RLC199W6



#BerlinLoft **Glue:** DB200W6
Registered embossed surface **Click:** RLC200W6

#ParisLoft


wineo 600 stone XL

#Factory



#SoHoFactory
Sand structure

Glue: DB205W6
Click: RLC205W6 (real joint)

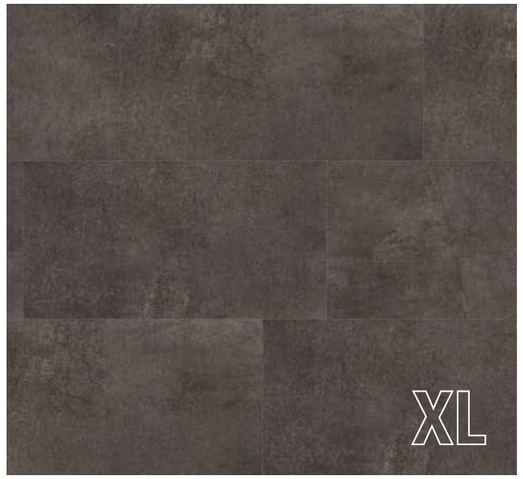

#BrooklynFactory
Sand structure

Glue: DB206W6
Click: RLC206W6 (real joint)



#NoordFactory
Sand structure

Glue: DB201W6
Click: RLC201W6 (real joint)




#CamdenFactory
Sand structure

Glue: DB202W6
Click: RLC202W6 (real joint)



#ChelseaFactory
Sand structure

Glue: DB203W6
Click: RLC203W6 (real joint)

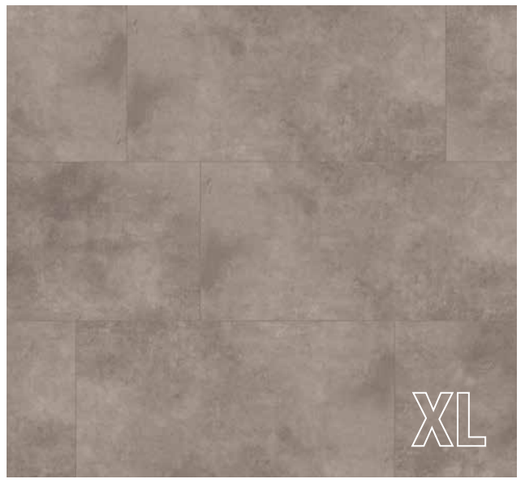

#NewtownFactory
Sand structure

Glue: DB204W6
Click: RLC204W6 (real joint)



#NewtownFactory

wineo 800

NEW!

FOCUS ON ESSENTIALS

Quality and style are the essentials that the new wineo 800 combines. This allows you to design rooms that inspire!

24 strong designs in three formats are divided into two trendy colour worlds, which impress with their simple aesthetics and distinctive design.

With a wear layer of 0.55 mm, wineo 800 is a premium design covering and is therefore ideal for commercial property and discerning private customers.

Discover the wineo 800 online!

Merano Oak Brown

wineo 800 pure


pure decors create rooms that invite you to relax.
Timeless elegance and simple aesthetics merge
to create a room concept that shows calm and serenity.
Our decors are based on high-quality natural designs
and a reduced colour palette.

pure

natural
minimalistic
balanced
calm













wineo 800 urban

Distinctive designs and refined accents can be found
in the urban world. Each design has been carefully selected
and creates an atmosphere that combines stylish design
with urban flair. The decors harmoniously combine elegance
and practicality.





elegant
restrained
distinctive
refined

urban









wineo 800 wood L | wood XL

Installation type: Glue | Elastic
Wear layer: 0,55 mm
Planks / box: 16 / 3,46 m² | 12 / 4,24 m²

1200 × 180 × 2,5 mm **L**

1505 × 235 × 2,5 mm **XL**

Installation type: Click | Multi-Layer | Rigid
Wear layer: 0,55 mm
Planks / box: 6 / 2,10 m²

1520 × 230 × 9 mm **XL**

wineo 800 stone XL


Installation type: Glue | Elastic
Wear layer: 0,55 mm
Tiles / box: 8 / 3,34 m²

914 × 457 × 2,5 mm **XL**



Stockholm Oak Taupe

wineo 800 pure | wood L

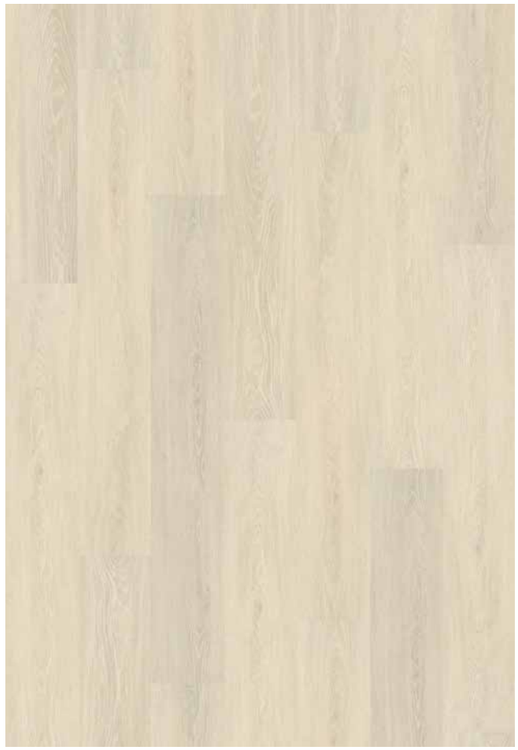

Visby Oak Cream **Glue:** DB815WL
Registered embossed surface



Stockholm Oak Taupe **Glue:** DB816WL
Registered embossed surface



Trondheim Oak Brown **Glue:** DB817WL
Registered embossed surface



Merano Oak Nature **Glue:** DB818WL
Registered embossed surface

wineo 800 urban | wood L



Merano Oak Brown **Glue:** DB819WL
Registered embossed surface



Stockholm Oak Brown **Glue:** DB820WL
Registered embossed surface



York Oak Brown **Glue:** DB821WL
Registered embossed surface



Clifton Oak Brown **Glue:** DB822WL
Registered embossed surface

wineo 800 pure | wood XL



Dalen Oak Lightgrey **Glue:** DB830WXL
Registered embossed surface **Click (Multi-Layer):** MLD830WXL



Lundby Maple Beige **Glue:** DB831WXL
Rough wood structure **Click (Multi-Layer):** MLD831WXL



Malmö Oak Beige **Glue:** DB832WXL
Registered embossed surface **Click (Multi-Layer):** MLD832WXL



Stavanger Oak Nature **Glue:** DB833WXL
Registered embossed surface **Click (Multi-Layer):** MLD833WXL

wineo 800 pure | wood XL



Dalen Oak Nature **Glue:** DB834WXL
Registered embossed surface **Click (Multi-Layer):** MLD834WXL



Narvik Oak Nature **Glue:** DB836WXL
Registered embossed surface **Click (Multi-Layer):** MLD836WXL



Lundby Maple Beige


wineo 800 urban | wood XL



Bradford Oak Honey **Glue:** DB835WXL
Registered embossed surface **Click (Multi-Layer):** MLD835WXL



Palermo Oak Brown **Glue:** DB837WXL
Registered embossed surface **Click (Multi-Layer):** MLD837WXL

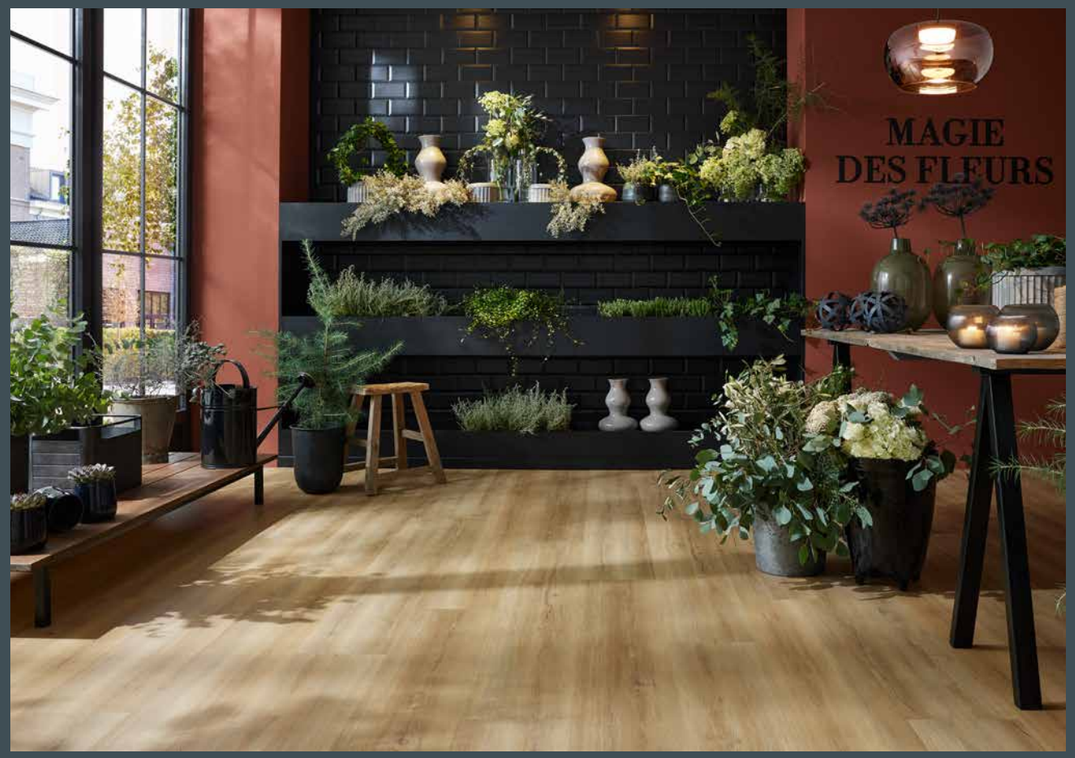

Bradford Oak Honey



Dublin Oak Brown **Glue:** DB838WXL
Registered embossed surface **Click (Multi-Layer):** MLD838WXL



Stavanger Oak Brown **Glue:** DB839WXL
Registered embossed surface **Click (Multi-Layer):** MLD839WXL



Bergamo Walnut Brown **Glue:** DB840WXL
Rough wood structure **Click (Multi-Layer):** MLD840WXL



Catania Pine Grey **Glue:** DB841WXL
Rough wood structure **Click (Multi-Layer):** MLD841WXL

wineo 800 pure | stone XL



Romo Concrete Lightgrey **Glue:** DB850SXL
Travertine



Bergen Marble Grey **Glue:** DB853SXL
Travertine



Bergen Marble Grey

wineo 800 urban | stone XL



Sheffield Concrete Grey



Sheffield Concrete Grey **Glue:** DB851SXL
Travertine



Chicago Concrete Dark **Glue:** DB852SXL
Travertine

PRODUCT COMPOSITION

ELASTIC DESIGN FLOORING FOR GLUING

Collections: wineo 400 | wineo 600 | wineo 800

PERFECT SOLUTION FOR

- even subsurfaces (new buildings)
- prepared subsurfaces (renovations)
- existing floor coverings (DIN 18202)
  in combination with singleGLUE self-adhesive mat



1 Top element
Surface texture, surface seal, wear layer and decor film

2 Base layer
Lends the product a high level of dimensional stability and optimum point-load resistance


3 Backing
With its waffle back texture, it is used to help ensure balance and optimal installation

MULTI-LAYER | RIGID DESIGN FLOORING FOR CLICKING IN

Collections: wineo 400 | wineo 800

PERFECT SOLUTION FOR

- subsurfaces with slight unevenness (renovations)
- bridging height differences (new buildings)

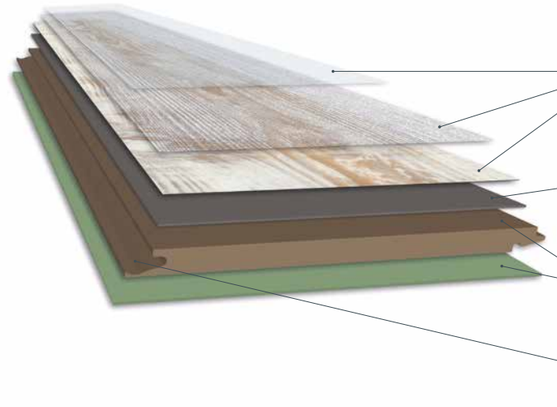

1 Top element
Surface texture, surface seal, wear layer and decor film

2 Base layer
Lends the product a high level of dimensional stability and optimum point-load resistance

3 Core board
With integrated soundPROTECT underlay mat

4 Profile connection
LocTec® locking with profile seal

SPECIAL PRODUCT FEATURES

- low installation height from 2 mm to 2.5 mm
- perfect heat distribution when used over underfloor heating
- simple cutting to size with a cutter knife

INSTALLATION OPTIONS

1. STANDARD GLUING

1.1 firm bond with the existing subsurface

1.2 bonds to the downward self-adhesive silentPLUS underlay mat

1.3 double-sided adhesive with the doubleGLUE self-adhesive mat

2. REMOVABLE DIY GLUING

- installation on singleGLUE self-adhesive underlay mat
- no gluing to the subsurface
- easy, fast and clean to install without liquid adhesives
- can be walked on immediately and is easy to remove

SPECIAL PRODUCT FEATURES

- practical installation height of 9 mm
- Tele-Stop: minor irregularities in the subfloor will not show up
- Install-Ready: integrated underlay mat cuts refurbishment times and reduces walking and impact sounds by up to 14 dB
- quick and easy installation thanks to proven click connection
- cutting to size with a saw or laminate cutter

INSTALLATION OPTIONS

1. FLOATING

- direct installation on the subsurface
- PE vapour barrier for installation on mineral subsurfaces
- can be walked on immediately and is easy to remove


SEMI-RIGID DESIGN FLOORING FOR CLICKING IN

Collection: wineo 600

Tele-Stop

PERFECT SOLUTION FOR

- prepared subsurfaces with minor irregularities (renovations)

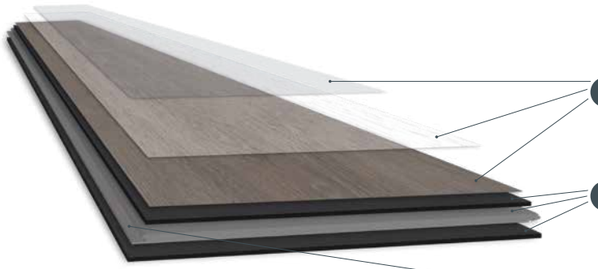

1 Top element
Surface texture, surface seal, wear layer and decor film

2 ABA core board
Stable product core with elastic top and bottom layer

3 Profile connection
Fold-down locking

SPECIAL PRODUCT FEATURES

- low installation height of 5 mm
- Tele-Stop: Minor irregularities in the subfloor will not show up
- perfect heat distribution when used over underfloor heating
- quick and easy installation thanks to proven click connection
- simple cutting to size with a cutter knife

INSTALLATION OPTIONS

1. FLOATING

- direct installation on the subsurface
- laying on the stabilising underlay mat silentRIGID
- can be walked on immediately and is easy to remove


RIGID DESIGN FLOORING FOR CLICKING IN

Collection: wineo 400

Tele-Stop Install Ready

PERFECT SOLUTION FOR

- prepared subsurfaces with minor irregularities (renovations)

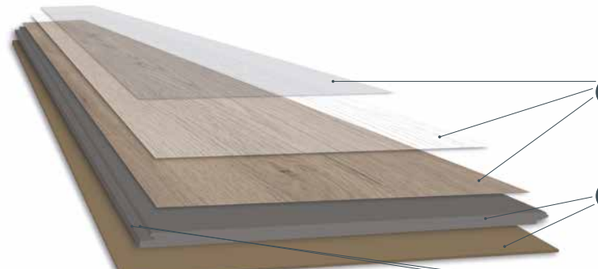

1 Top element
Surface texture, surface seal, wear layer and decor film

2 SPC core board
Stable and robust product core with integrated noiseREDUCT underlay mat

3 Profile connection
LocTec® locking

SPECIAL PRODUCT FEATURES

- low installation height of 5.5 mm
- Tele-Stop: Minor irregularities in the subfloor will not show up
- Install-Ready: integrated underlay mat cuts refurbishment times and reduces walking and impact sounds by up to 19 dB
- perfect heat distribution when used over underfloor heating
- quick and easy installation thanks to proven click connection
- simple cutting to size with a cutter knife

VERLEGEMÖGLICHKEITEN

1. FLOATING

- direct installation on the subsurface
- can be walked on immediately and is easy to remove

More details can be found in our installation instruction under en.wineo.de

ACCESSORIES

UNDERLAY MATERIAL | SELF-ADHESIVE MATS

We recommend our self-adhesive mats singleGLUE or doubleGLUE and the underlay material silentPLUS, silentCOMFORT or silentRIGID with wineo design flooring.
The basis is a high-performance composite material which is predominantly made from vegetable oils such as canola or castor oil and naturally occurring mineral components such as chalk.

- **fast, energy-efficient distribution of ground heat**
- **excellent noise reduction with hard and soft floor coverings**
- **long-life performance of at least 30 years**
- **excellent residual indentation behaviour**
- **sustainable raw materials**
- **without chlorine, plasticisers or solvents**

Detailed information can be found in our accessories brochure Art.-no. 20091021.

Download now:

www.blauer-engel.de/uz156



SKIRTINGS

- decor matching MDF skirtings for all wineo floor
- universally usable skirtings MDF
- installation heights from 60 mm and 80 mm
- plastic mounting clips included in the range of accessories; alternatively glue or tack
- self-adhesive corner elements for easy installation

WE FOCUS ON TRANSPARENCY.

Certifications

A+
Just like the “Blue Angel” in Germany, the A+ seal identifies our products as ecological, healthy and user friendly in the French market. ✓

TFI-TÜV PROFICERT PREMIUM
The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk. ✓

CE marking
The CE marking confirms that our product has been tested and that it meets all EU requirements in terms of safety, healthcare and environmental protection. ✓

(only for wineo 400 rigid)

(only for wineo 600 rigid)

factory made coated
Design floors from wineo are coated with a PU sealant at the factory, which makes them particularly hard-wearing and protects them from abrasion. ✓


Phthalate free
wineo floor coverings are phthalate-free. This means that only harmless plasticizers are used. ✓

SERVICE



TECHNICAL SUPPORT


Do you have any questions about our products, their areas-of application or their installation?
Our capable technical-team is happy to help you:
Tel.: +49 (0) 52 37 609 – 530

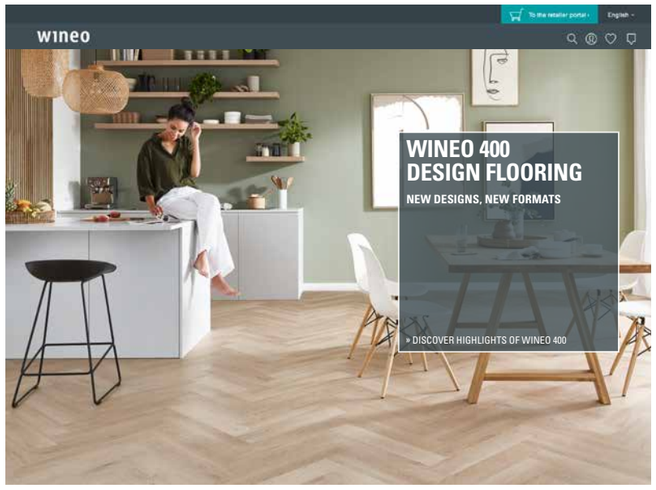

EN.WINEO.DE

Even more information is available on our website:

- dealer portal with direct ordering option
- our top reference projects
- tender specifications
- technical data sheets
- cleaning and installation instructions
- find a dealer
- video portal with lots of tips
- newsletter registration
- and much more

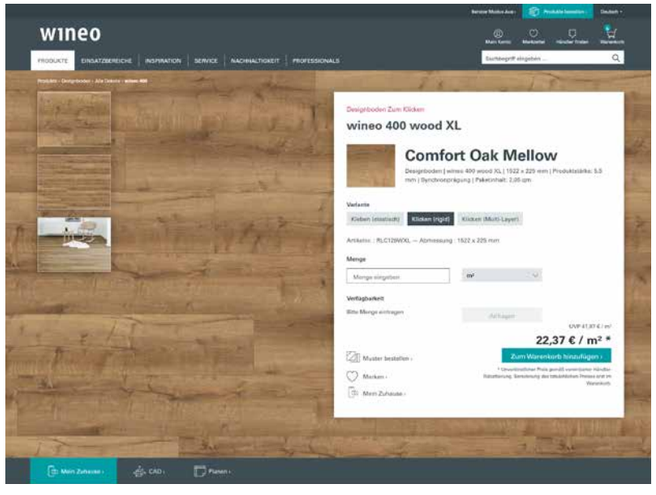

PARTNERPORTAL AT EN.WINEO.DE

- simple ordering of products
- real-time enquiry of product availability
- quick entry of orders
- order status and shipment tracking
- optimum customer advice with the advisor mode
- customised price list available
- access to image data for all products



SOCIAL MEDIA

Inspiration and product-specific knowledge in exciting short articles – you can discover under:

- Instagram
- Facebook
- YouTube
- Pinterest
- LinkedIn



WINEO FLOOR VIEWER

Any wineo floor can be simulated in your own home in an instant with our wineo Floor Viewer. The ideal way to choose the perfect flooring for you.


Test the wineo Floor Viewer now at **floorviewer.wineo.de** or by QR code.

TECHNICAL CHARACTERISTICS

Collection	**wineo 400** wood XS	**wineo 400** wood L			**wineo 400** wood XL			**wineo 400** stone L		
				Multi-Layer			Multi-Layer			Multi-Layer
Installation type	Glue	Glue	Click	Click	Glue	Click	Click	Glue	Click	Click
Connection	-		LocTec®	LocTec®	-	LocTec®	LocTec®	-	LocTec®	LocTec®
Format	610 × 122 mm	1200 × 180 mm	1220 × 180 mm	1222 × 182 mm	1505 × 235 mm	1522 × 225 mm	1520 × 230 mm	610 × 305 mm	610 × 305 mm	601 × 310 mm
Product thickness	2 mm	2 mm	5,5 mm	9 mm	2 mm	5,5 mm	9 mm	2 mm	5,5 mm	9 mm
Wear layer	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm
Weight	3,88 kg/m²	3,88 kg/m²	9,40 kg/m²	9,20 kg/m²	3,88 kg/m²	9,40 kg/m²	9,20 kg/m²	3,88 kg/m²	9,40 kg/m²	9,20 kg/m²
Planks or tiles / box	24 / 1,79 m²	18 / 3,89 m²	10 / 2,20 m²	9 / 2,00 m²	12 / 4,24 m²	6 / 2,05 m²	6 / 2,10 m²	16 / 2,98 m²	10 / 1,86 m²	9 / 1,68 m²
Boxes / pallet	140 / 250,60 m²	60 / 233,40 m²	48 / 105,60 m²	44 / 88,00 m²	60 / 254,40 m²	52 / 106,60 m²	52 / 109,20 m²	84 / 250,32 m²	60 / 111,60 m²	60 / 100,80 m²
Surface treatment	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU
Joint	micro bevel	micro bevel	micro bevel	micro bevel	micro bevel	V4	micro bevel	micro bevel	micro bevel	micro bevel
Utilisation class | EN ISO 10874	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31
Reaction to fire | EN 13501-1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1
Anti slip category | EN 16165	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10
Anti-static properties | EN 1815	≤ 2 kV	≤ 2 kV	-	≤ 2 kV	≤ 2 kV	-	≤ 2 kV	≤ 2 kV	-	≤ 2 kV
Staining / Chemical resistance | EN ISO 26987	High resistance level depending on concentration and exposure time.									
Light fastness | EN ISO 105-B02 (procedure 2)	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Residual indentation | EN ISO 24343-1	≤ 0,1 mm	≤ 0,1 mm	≤ 0,2 mm	≤ 0,2 mm	≤ 0,1 mm	≤ 0,2 mm	≤ 0,2 mm	≤ 0,1 mm	≤ 0,2 mm	≤ 0,2 mm
Suitability for underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C (Click and Multi-Layer) and 29 °C (Glue).									
Thermal resistance (m²K) / W | EN12667	≤ 0,011	≤ 0,011	≤ 0,035	≤ 0,058	≤ 0,011	≤ 0,035	≤ 0,058	≤ 0,011	≤ 0,035	≤ 0,058
Impact sound reduction | EN ISO 16251-1	~ 4 dB	~ 4 dB	~ 19 dB	~ 14 dB	~ 4 dB	~19 dB	~ 14 dB	~ 4 dB	~ 19 dB	~ 14 dB
Dimensional stability | EN ISO 23999	≤ 0,15 %	≤ 0,15 %	≤ 0,1 %	-	≤ 0,15 %	≤ 0,1 %	-	≤ 0,15 %	≤ 0,1 %	-
Guarantee	en.wineo.de/service/guarantee									



Utilisation class 23:
Domestic area with intensive usage



Utilisation class 31:
Commercial sector with low or occasional usage




Comfort Oak Nature

TECHNICAL CHARACTERISTICS

Collection	**wineo 600** wood L		**wineo 600** wood XL		**wineo 600** stone XL		**wineo 800** wood L	**wineo 800** wood XL		**wineo 800** stone XL
	Rigid		Rigid		Rigid			Multi-Layer		
Installation type	Glue	Click	Glue	Click	Glue	Click	Glue	Glue	Click	Glue
Connection	-	Fold-Down	-	Fold-Down	-	Fold-Down	-	-	LocTec®	-
Format	1200 × 180 mm	1212 × 186 mm	1505 × 235 mm	1507 × 234 mm	914 × 457 mm	746 × 477 mm	1200 × 180 mm	1505 × 235 mm	1520 × 230 mm	914 × 457 mm
Product thickness	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2,5 mm	2,5 mm	9 mm	2,5 mm
Wear layer	0,4 mm	0,4 mm	0,4 mm	0,4 mm	0,4 mm	0,4 mm	0,55 mm	0,55 mm	0,55 mm	0,55 mm
Weight	3,44 kg/m²	10,10 kg/m²	3,44 kg/m²	10,10 kg/m²	3,44 kg/m²	10,10 kg/m²	4,40 kg/m²	4,40 kg/m²	9,60 kg/m²	4,40 kg/m²
Planks or tiles / box	18 / 3,89 m²	8 / 1,80 m²	12 / 4,24 m²	6 / 2,12 m²	12 / 5,01 m²	6 / 2,14 m²	16 / 3,46 m²	12 / 4,24 m²	6 / 2,10 m²	8 / 3,34 m²
Boxes / pallet	60 / 233,40 m²	56 / 100,80 m²	64 / 271,36 m²	48 / 101,76 m²	52 / 260,52 m²	44 / 94,16 m²	60 / 207,60 m²	52 / 220,48 m²	52 / 109,20 m²	64 / 213,76 m²
Surface treatment	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU
Joint	micro bevel	micro bevel	micro bevel	micro bevel	micro bevel	real joint	micro bevel	micro bevel	micro bevel	micro bevel
Utilisation class | EN ISO 10874	23 / 32 / 41	23 / 32	23 / 32 / 41	23 / 32	23 / 32 / 41	23 / 32	23 / 33 / 42	23 / 33 / 42	23 / 33	23 / 33 / 42
Reaction to fire | EN 13501-1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1	B_{fl} – s1
Anti slip category | DIN 51130	R 9	R 9	R 9	R 9	R 9	R 9	R 10	R 10	R 10	R 10
Anti-static properties | EN 1815	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
Staining / Chemical resistance | EN ISO 26987	High resistance level depending on concentration and exposure time.*									
Light fastness | EN ISO 105-B02 (procedure 2)	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Residual indentation | EN ISO 24343-1	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm
Suitability for underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C (Click and Multi-Layer) and 29 °C (Glue).									
Thermal resistance (m²K) / W | EN12667	≤ 0,011	≤ 0,05	≤ 0,011	≤ 0,05	≤ 0,011	≤ 0,05	≤ 0,012	≤ 0,012	≤ 0,059	≤ 0,012
Impact sound reduction | EN ISO 16251-1	~ 4 dB	~ 6 dB	~ 4 dB	~ 6 dB	~ 4 dB	~ 6 dB	~ 4 dB	~ 4 dB	~ 14 dB	~ 4 dB
Dimensional stability | EN ISO 23999	≤ 0,15 %	≤ 0,1 %	≤ 0,15 %	≤ 0,1 %	≤ 0,15 %	≤ 0,1 %	≤ 0,15 %	≤ 0,15 %	-	≤ 0,15 %
Guarantee	en.wineo.de/service/guarantee									




Utilisation class 23:
Domestic area with intensive usage




Utilisation class 32:
Normal use in the commercial sector



Utilisation class 33:
Commercial sector with heavy usage



Utilisation class 41:
Light industry sector with moderate usage



Utilisation class 42:
Normal use in the light industrial sector

*For wineo 600 rigid:
Resistance to staining EN 438-2
Group 1 + 2: Measurement 5
Group 3: Measurement 4

- Cleaning and maintenance instructions online at www.wineo.de/Service
- All decors shown in this brochure are reproductions. Windmöller GmbH provides no guarantee with regard to mistakes, printing errors and technical changes.

Product no. 20061112 | 02/2026

wineo

Windmöller GmbH
info@wineo.de
www.wineo.de

Member of

FEB ERFMI DGNB mmfa