

wineo



DESIGN FLOORING

CONTENTS

Product advantages	04
wineo 400	06
wineo 600	18
wineo 800	30
Product composition	44
Accessories	48
Awards & Quality	49
Service	50
Technical characteristics	52



PRODUCT ADVANTAGES



DURABLE

The product composition and the special surface finish make the design floor extremely durable. It can easily withstand heavy wear and tear.



HIGH COMFORT

The design flooring is kind to joints, warm to the feet, with excellent walking and standing support. Installed on underfloor heating, the design flooring conveys an extra sense of cosy warmth.



EASY CARE

Thanks to the sealed surface, the design flooring is stain-resistant and easy to clean.



SUITABLE FOR HIGH HUMIDITY AREAS

All wineo design floorings are perfectly suitable for high humidity rooms such as the kitchen or bathroom.



QUIET

The elastic surface reduces walking noise and provides pleasant room acoustics.



SLIP-RESISTANT

The proven slip-resistant surface provides safety with every step.

3-in-1

wineo 400

LIVE AS YOU ARE

Live the way you imagine it
and find the style that suits you.

The wineo 400 offers
four inspiring trends,
a variety of designs and
different formats.

This is the perfect foundation
to design your home according
to your individual taste.
From XS to XL, from light to dark,
from calm to rustic –
the wineo 400 is as individual
as you are!

Let yourself be inspired
and find your own style!



Learn more about wineo 400!

wineo 400 wood XS | wood L | wood XL

Installation type: Glue | Elastic
Wear layer: 0.3 mm
Planks / box: 24 / 1.79 m² | 18 / 3.89 m² | 12 / 4.24 m²

	610 × 122 × 2 mm	XS
	1200 × 180 × 2 mm	L
	1505 × 235 × 2 mm	XL
	1220 × 180 × 5,5 mm	L
	1522 × 225 × 5,5 mm	XL
	1222 × 182 × 9 mm	L
	1520 × 230 × 9 mm	XL

Installation type: Click | Rigid
Wear layer: 0.3 mm
Planks / box: 10 / 2.20 m² | 6 / 2.05 m²

Installation type: Click | Multi-Layer | Rigid
Wear layer: 0.3 mm
Planks / box: 9 / 2.00 m² | 6 / 2.10 m²

wineo 400 stone L

Installation type: Glue | Elastic
Wear layer: 0.3 mm
Tiles / box: 16 / 2.98 m²

	610 × 305 × 2 mm	L
	610 × 305 × 5,5 mm	L
	601 × 310 × 9 mm	L

Installation type: Click | Rigid
Wear layer: 0.3 mm
Tiles / box: 10 / 1.86 m²

Installation type: Click | Multi-Layer | Rigid
Wear layer: 0.3 mm
Tiles / box: 9 / 1.68 m²



Plain Oak Beige

FASCINATION
HERRINGBONE
For each trend
a highlight



Comfort Oak Nature



Easy Oak Greige
Registered embossed surface

Glue: DB288WXL | Click: RLC288WXL
Click (Multi-Layer): MLD288WXL



Nordic Maple Cream
Rough wood structure

Glue: DB289WXL | Click: RLC289WXL
Click (Multi-Layer): MLD289WXL



Calm Ash Beige
Rough wood structure

Glue: DB290WXL | Click: RLC290WXL
Click (Multi-Layer): MLD290WXL




Comfort Oak Nature
Registered embossed surface

Glue: DB291WXL | Click: RLC291WXL
Click (Multi-Layer): MLD291WXL



Balanced Oak Lightgrey
Registered embossed surface

Glue: DB286VXS

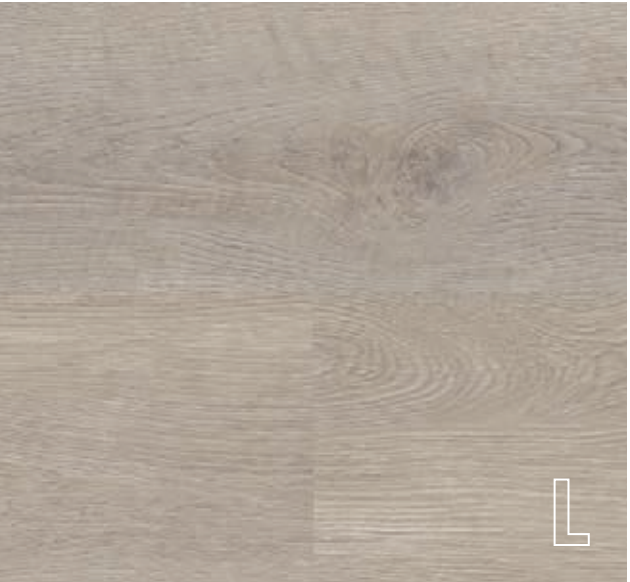

Balanced Oak Lightgrey
Registered embossed surface

Glue: DB286WL | Click: RLC286WL
Click (Multi-Layer): MLD286WL



Coast Pine Greige
Rough wood structure

Glue: DB280WL | Click: RLC280WL
Click (Multi-Layer): MLD280WL



Craft Concrete Grey
Travertine

Glue: DB302SL | Click: RLC302SL
Click (Multi-Layer): MLD302SL



Comfort Oak Nature



Plain Oak Beige



Plain Oak Beige
Registered embossed surface

Glue: DB281WXS



Plain Oak Beige
Registered embossed surface

Glue: DB281WL | Click: RLC281WL
Click (Multi-Layer): MLD281WL




Shadow Oak Nature
Registered embossed surface

Glue: DB292WXL | Click: RLC292WXL
Click (Multi-Layer): MLD292WXL



Country Oak Nature
Registered embossed surface

Glue: DB294WXL | Click: RLC294WXL
Click (Multi-Layer): MLD294WXL

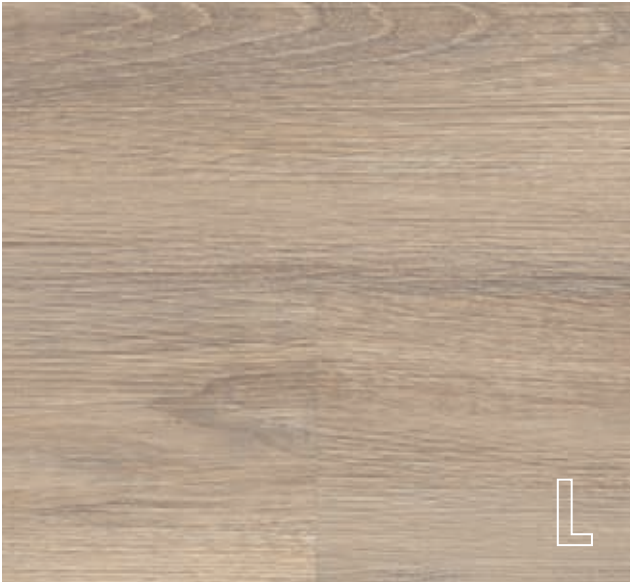

Vibrant Oak Beige
Registered embossed surface

Glue: DB282WL | Click: RLC282WL
Click (Multi-Layer): MLD282WL



Industrial Concrete Grey
Travertine

Glue: DB303SL | Click: RLC303SL
Click (Multi-Layer): MLD303SL



Comfort Oak Brown
Registered embossed surface

Glue: DB293WXL | Click: RLC293WXL
Click (Multi-Layer): MLD293WXL



Joy Oak Tender
Registered embossed surface

Glue: DB126WXL | Click: RLC126WXL
Click (Multi-Layer): MLD126WXL



Plain Oak Beige



Authentic Oak Brown



Limed Oak Silver
Registered embossed surface

Glue: DB301WXL | **Click:** RLC301WXL
Click (Multi-Layer): MLD301WXL



Authentic Oak Brown
Registered embossed surface

Glue: DB296WXL | **Click:** RLC296WXL
Click (Multi-Layer): MLD296WXL



Vintage Oak Brown
Registered embossed surface

Glue: DB297WXL | **Click:** RLC297WXL
Click (Multi-Layer): MLD297WXL



Comfort Oak Taupe
Registered embossed surface

Glue: DB300WXL | **Click:** RLC300WXL
Click (Multi-Layer): MLD300WXL



Vivid Oak Nature
Registered embossed surface

Glue: DB283WXS




Vivid Oak Nature
Registered embossed surface

Glue: DB283WL | **Click:** RLC283WL
Click (Multi-Layer): MLD283WL



Coast Pine Taupe
Rough wood structure

Glue: DB284WL | **Click:** RLC284WL
Click (Multi-Layer): MLD284WL

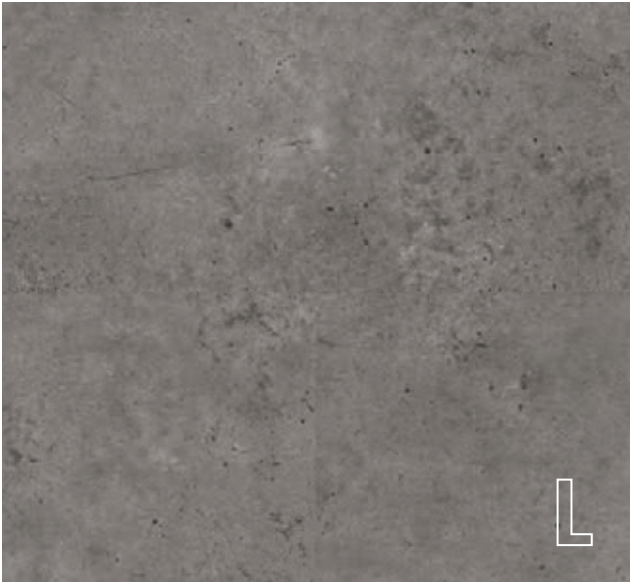

Industrial Concrete Dark
Travertine

Glue: DB304SL | **Click:** RLC304SL
Click (Multi-Layer): MLD304SL



Authentic Oak Brown



lounge

Comfort Oak Dark



Comfort Oak Mellow
Registered embossed surface

Glue: DB129WXL | Click: RLC129WXL
Click (Multi-Layer): MLD129WXL



Shadow Oak Brown
Registered embossed surface

Glue: DB295WXL | Click: RLC295WXL
Click (Multi-Layer): MLD295WXL



Cool Walnut Dark
Rough wood structure

Glue: DB298WXL | Click: RLC298WXL
Click (Multi-Layer): MLD298WXL



Comfort Oak Dark
Registered embossed surface

Glue: DB299WXL | Click: RLC299WXL
Click (Multi-Layer): MLD299WXL



Balanced Oak Brown
Registered embossed surface

Glue: DB285WXS



Balanced Oak Brown
Registered embossed surface

Glue: DB285WL | Click: RLC285WL
Click (Multi-Layer): MLD285WL



Balanced Oak Grey
Registered embossed surface

Glue: DB287WL | Click: RLC287WL
Click (Multi-Layer): MLD287WL



Timeless Slate Dark
Travertine

Glue: DB305SL | Click: RLC305SL
Click (Multi-Layer): MLD305SL



Comfort Oak Dark



wineo 600

CONFIDENT IN STYLE. LEAD THE WAY.

Standing out in style while staying low on the ground.

The XL formats and trendy designs of wineo 600 are inspiring.

New York, London or Sydney – plenty of elegant styles for living and working with flair. And, with the click version wineo 600 rigid, every new look can be realised in no time at all.

Choose from 18 wood designs and 6 stone looks for gluing and clicking in – both versions are quick and easy to install. With a wear layer of 0.4 mm, the wineo 600 is perfect for both private homes and smaller commercial buildings.



Find out everything about rigid!

wineo 600 wood L | wood XL

Installation type: Glue | Elastic
Wear layer: 0,4 mm
Planks / box: 18 / 3,89 m² | 12 / 4,24 m²

	1200 × 180 × 2 mm	L
	1505 × 235 × 2 mm	XL

Installation type: Click | Semi-Rigid
Wear layer: 0,4 mm
Planks / box: 8 / 1,80 m² | 6 / 2,12 m²

	1212 × 186 × 5 mm	L
	1507 × 234 × 5 mm	XL

wineo 600 stone XL

Installation type: Glue | Elastic
Wear layer: 0,4 mm
Tiles / box: 12 / 5,01 m²

	914 × 457 × 2 mm	XL
---	------------------	----

Installation type: Click | Semi-Rigid
Wear layer: 0,4 mm
Tiles / box: 6 / 2,14 m²

	746 × 477 × 5 mm	XL
--	------------------	----



wineo 600 wood L

#Place



#NaturalPlace
Exclusive wood structure
Glue: DB183W6
Click: RLC183W6



#WarmPlace
Exclusive wood structure
Glue: DB184W6
Click: RLC184W6



#SmoothPlace
Exclusive wood structure
Glue: DB185W6
Click: RLC185W6



#CozyPlace
Exclusive wood structure
Glue: DB186W6
Click: RLC186W6



#ElegantPlace
Exclusive wood structure
Glue: DB187W6
Click: RLC187W6



#ModernPlace
Exclusive wood structure
Glue: DB188W6
Click: RLC188W6



#WarmPlace

wineo 600 wood XL

#Loft



#CopenhagenLoft
Registered embossed surface

XL

Glue: DB189W6
Click: RLC189W6



#MilanoLoft
Registered embossed surface

XL

Glue: DB190W6
Click: RLC190W6



#BarcelonaLoft
Registered embossed surface

XL

Glue: DB191W6
Click: RLC191W6



#LisbonLoft
Registered embossed surface

XL

Glue: DB192W6
Click: RLC192W6



#LondonLoft
Registered embossed surface

XL

Glue: DB193W6
Click: RLC193W6



#SydneyLoft
Registered embossed surface

XL

Glue: DB194W6
Click: RLC194W6



wineo 600 wood XL

#Loft



#AmsterdamLoft
Registered embossed surface

XL

Glue: DB195W6
Click: RLC195W6



#ViennaLoft
Registered embossed surface

XL

Glue: DB196W6
Click: RLC196W6



#NewYorkLoft
Registered embossed surface

XL

Glue: DB197W6
Click: RLC197W6



#MoscowLoft
Registered embossed surface

XL

Glue: DB198W6
Click: RLC198W6



#ParisLoft
Registered embossed surface

XL

Glue: DB199W6
Click: RLC199W6



#BerlinLoft
Registered embossed surface

XL

Glue: DB200W6
Click: RLC200W6





#SoHoFactory
Sand structure

Glue: DB205W6
Click: RLC205W6 (real joint)



#BrooklynFactory
Sand structure

Glue: DB206W6
Click: RLC206W6 (real joint)



#NoordFactory
Sand structure

Glue: DB201W6
Click: RLC201W6 (real joint)



#CamdenFactory
Sand structure

Glue: DB202W6
Click: RLC202W6 (real joint)



#ChelseaFactory
Sand structure

Glue: DB203W6
Click: RLC203W6 (real joint)



#NewtownFactory
Sand structure

Glue: DB204W6
Click: RLC204W6 (real joint)



#NewtownFactory



wineo 800

NEW!

FOCUS ON ESSENTIALS

Quality and style are the essentials that the new wineo 800 combines. This allows you to design rooms that inspire!

24 strong designs in three formats are divided into two trendy colour worlds, which impress with their simple aesthetics and distinctive design.

With a wear layer of 0.55 mm, wineo 800 is a premium design covering and is therefore ideal for commercial property and discerning private customers.




Discover the wineo 800 online!

wineo 800 pure

pure decors create rooms that invite you to relax. Timeless elegance and simple aesthetics merge to create a room concept that shows calm and serenity. Our decors are based on high-quality natural designs and a reduced colour palette.


pure

natural
minimalistic
balanced
calm




wineo 800 urban

Distinctive designs and refined accents can be found in the urban world. Each design has been carefully selected and creates an atmosphere that combines stylish design with urban flair. The decors harmoniously combine elegance and practicality.



elegant
restrained
distinctive
refined

urban



wineo 800 wood L | wood XL

Installation type: Glue | Elastic

Wear layer: 0,55 mm

Planks / box: 16 / 3,46 m² | 12 / 4,24 m²



1200 × 180 × 2,5 mm

L



1505 × 235 × 2,5 mm

XL

Installation type: Click | Multi-Layer | Rigid

Wear layer: 0,55 mm

Planks / box: 6 / 2,10 m²



1520 × 230 × 9 mm


XL

wineo 800 stone XL

Installation type: Glue | Elastic

Wear layer: 0,55 mm

Tiles / box: 8 / 3,34 m²



914 × 457 × 2,5 mm

XL



Stockholm Oak Taupe

wineo 800 pure | wood L



Visby Oak Cream
Registered embossed surface

Glue: DB815WL



Stockholm Oak Taupe
Registered embossed surface

Glue: DB816WL



Trondheim Oak Brown
Registered embossed surface

Glue: DB817WL



Merano Oak Nature
Registered embossed surface

Glue: DB818WL

wineo 800 urban | wood L



Merano Oak Brown
Registered embossed surface

Glue: DB819WL



Stockholm Oak Brown
Registered embossed surface

Glue: DB820WL



York Oak Brown
Registered embossed surface

Glue: DB821WL



Clifton Oak Brown
Registered embossed surface

Glue: DB822WL

wineo 800 pure | wood XL



Dalen Oak Lightgrey
Registered embossed surface

Glue: DB830WXL
Click (Multi-Layer): MLD830WXL



Lundby Maple Beige
Rough wood structure

Glue: DB831WXL
Click (Multi-Layer): MLD831WXL



Malmö Oak Beige
Registered embossed surface

Glue: DB832WXL
Click (Multi-Layer): MLD832WXL



Stavanger Oak Nature
Registered embossed surface

Glue: DB833WXL
Click (Multi-Layer): MLD833WXL

wineo 800 pure | wood XL



Dalen Oak Nature
Registered embossed surface

Glue: DB834WXL
Click (Multi-Layer): MLD834WXL



Narvik Oak Nature
Registered embossed surface

Glue: DB836WXL
Click (Multi-Layer): MLD836WXL



Lundby Maple Beige



Bradford Oak Honey
Registered embossed surface
Glue: DB835WXL
Click (Multi-Layer): MLD835WXL



Palermo Oak Brown
Registered embossed surface
Glue: DB837WXL
Click (Multi-Layer): MLD837WXL



Dublin Oak Brown
Registered embossed surface
Glue: DB838WXL
Click (Multi-Layer): MLD838WXL



Stavanger Oak Brown
Registered embossed surface
Glue: DB839WXL
Click (Multi-Layer): MLD839WXL



Bradford Oak Honey



Bergamo Walnut Brown
Rough wood structure
Glue: DB840WXL
Click (Multi-Layer): MLD840WXL



Catania Pine Grey
Rough wood structure
Glue: DB841WXL
Click (Multi-Layer): MLD841WXL

wineo 800 pure | stone XL



Romo Concrete Lightgrey
Travertine

Glue: DB850SXL



Bergen Marble Grey
Travertine

Glue: DB853SXL



Bergen Marble Grey

wineo 800 urban | stone XL




Sheffield Concrete Grey



Sheffield Concrete Grey
Travertine

Glue: DB851SXL

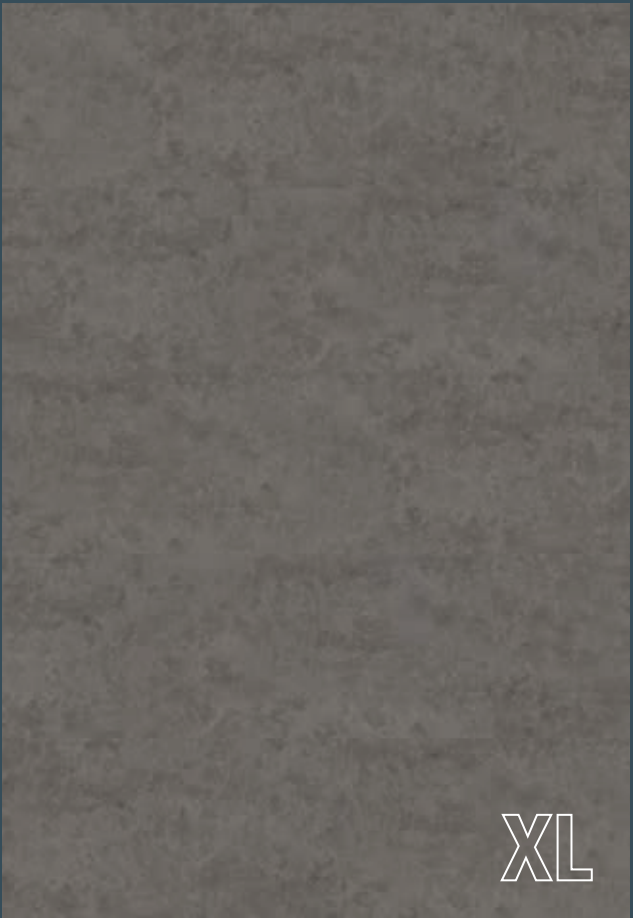

Chicago Concrete Dark
Travertine

Glue: DB852SXL

PRODUCT COMPOSITION


ELASTIC DESIGN FLOORING FOR GLUING

Collections: wineo 400 | wineo 600 | wineo 800



PERFECT SOLUTION FOR

- even subsurfaces (new buildings)
- prepared subsurfaces (renovations)
- existing floor coverings (DIN 18202)
in combination with singleGLUE self-adhesive mat

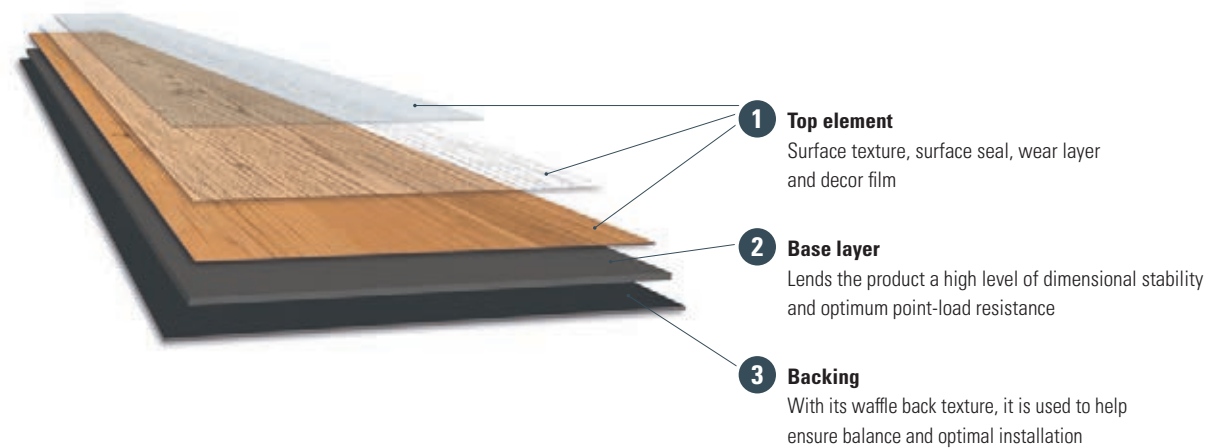

i

SPECIAL PRODUCT FEATURES

- low installation height from 2 mm to 2.5 mm
- perfect heat distribution when used over underfloor heating
- simple cutting to size with a cutter knife

INSTALLATION OPTIONS

1. STANDARD GLUING

- 1.1** firm bond with the existing subsurface
- 1.2** bonds to the downward self-adhesive silentPLUS underlay mat
- 1.3** double-sided adhesive with the doubleGLUE self-adhesive mat

2. REMOVABLE DIY GLUING

- installation on singleGLUE self-adhesive underlay mat
- no gluing to the subsurface
- easy, fast and clean to install without liquid adhesives
- can be walked on immediately and is easy to remove


MULTI-LAYER | RIGID DESIGN FLOORING FOR CLICKING IN

Collections: wineo 400 | wineo 800



PERFECT SOLUTION FOR

- subsurfaces with slight unevenness (renovations)
- bridging height differences (new buildings)

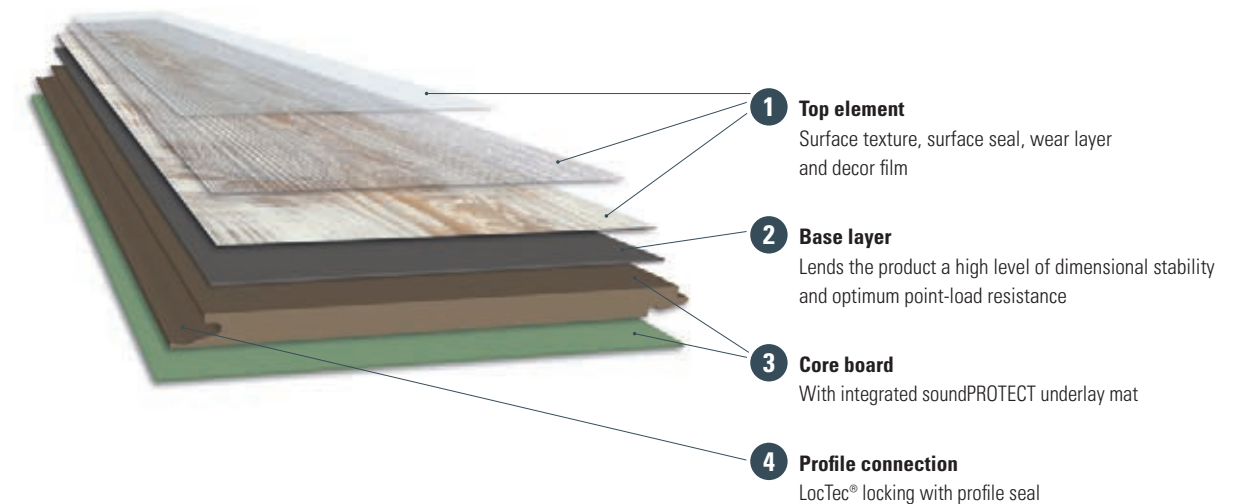

i

SPECIAL PRODUCT FEATURES

- practical installation height of 9 mm
- Tele-Stop: minor irregularities in the subfloor will not show up
- Install-Ready: integrated underlay mat cuts refurbishment times and reduces walking and impact sounds by up to 14 dB
- quick and easy installation thanks to proven click connection
- cutting to size with a saw or laminate cutter

INSTALLATION OPTIONS

1. FLOATING

- direct installation on the subsurface
- PE vapour barrier for installation on mineral subsurfaces
- can be walked on immediately and is easy to remove


SEMI-RIGID DESIGN FLOORING FOR CLICKING IN

Collection: wineo 600



PERFECT SOLUTION FOR

- prepared subsurfaces with minor irregularities (renovations)

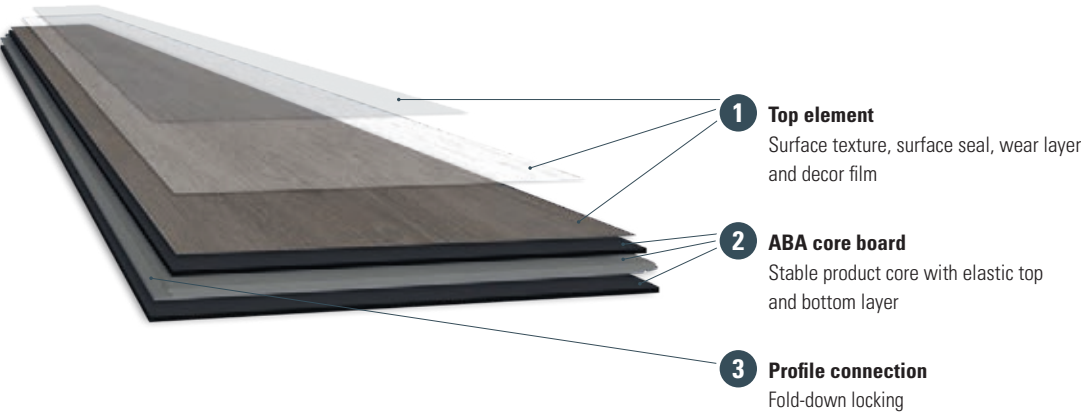

SPECIAL PRODUCT FEATURES

- low installation height of 5 mm
- Tele-Stop: Minor irregularities in the subfloor will not show up
- perfect heat distribution when used over underfloor heating
- quick and easy installation thanks to proven click connection
- simple cutting to size with a cutter knife

INSTALLATION OPTIONS

1. FLOATING

- direct installation on the subsurface
- laying on the stabilising underlay mat silentRIGID
- can be walked on immediately and is easy to remove


RIGID DESIGN FLOORING FOR CLICKING IN

Collection: wineo 400



PERFECT SOLUTION FOR

- prepared subsurfaces with minor irregularities (renovations)

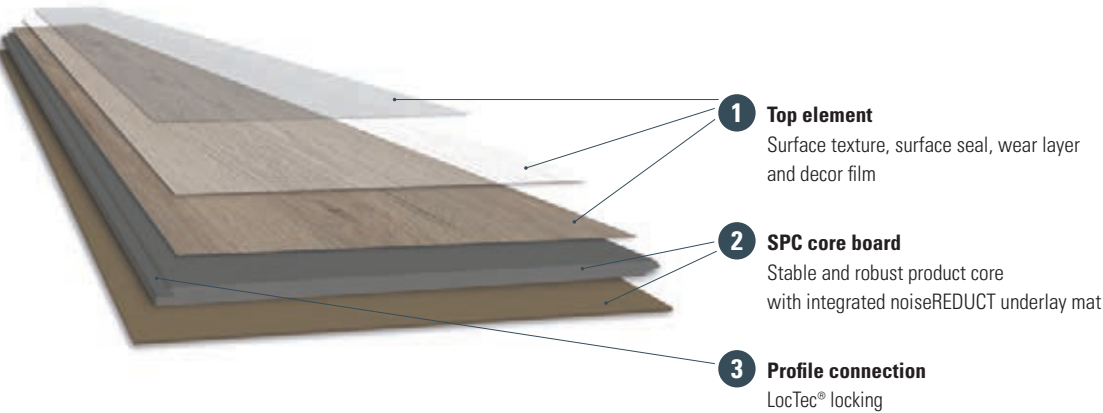

SPECIAL PRODUCT FEATURES

- low installation height of 5.5 mm
- Tele-Stop: Minor irregularities in the subfloor will not show up
- Install-Ready: integrated underlay mat cuts refurbishment times and reduces walking and impact sounds by up to 19 dB
- perfect heat distribution when used over underfloor heating
- quick and easy installation thanks to proven click connection
- simple cutting to size with a cutter knife

INSTALLATION OPTIONS

1. FLOATING

- direct installation on the subsurface
- can be walked on immediately and is easy to remove

ACCESSORIES

UNDERLAY MATERIAL | SELF-ADHESIVE MATS

We recommend our self-adhesive mats singleGLUE or doubleGLUE and the underlay material silentPLUS, silentCOMFORT or silentRIGID with wineo design flooring.

The basis is ecuran, a high-performance composite material which is predominantly made from vegetable oils such as canola or castor oil and naturally occurring mineral components such as chalk.

- fast, energy-efficient distribution of ground heat
- excellent noise reduction with hard and soft floor coverings
- long-life performance of at least 30 years
- excellent residual indentation behaviour
- sustainable raw materials
- without chlorine, plasticisers or solvents



Detailed information can be found in our accessories brochure Art.-no. 20091021.

Download now:



SKIRTINGS

- decor matching MDF skirtings for all wineo floor
- universally usable skirtings MDF
- installation heights from 60 mm and 80 mm
- plastic mounting clips included in the range of accessories; alternatively glue or tack
- self-adhesive corner elements for easy installation

WE FOCUS ON TRANSPARENCY.

Certifications		
	A+ Just like the “Blue Angel” in Germany, the A+ seal identifies our products as ecological, healthy and user friendly in the French market.	✓
	TFI-TÜV PROFICERT PREMIUM The TFI (Textiles & Flooring Institute GmbH) and TÜV Hessen evaluate products from a quality, health and ecological point of view. Essentially, products can only be certified if they present no health risk.	✓
	CE marking The CE marking confirms that our product has been tested and that it meets all EU requirements in terms of safety, healthcare and environmental protection.	
 (only for wineo 400 rigid)		✓
 (only for wineo 600 rigid)		
	factory made coated Design floors from wineo are coated with a PU sealant at the factory, which makes them particularly hard-wearing and protects them from abrasion.	✓
	Phthalate free wineo floor coverings are phthalate-free. This means that only harmless plasticizers are used.	✓

SERVICE




TECHNICAL SUPPORT

Do you have any questions about our products, their areas-of application or their installation?

Our capable technical-team is happy to help you:


Tel.: +49 (0) 52 37 609 – 530

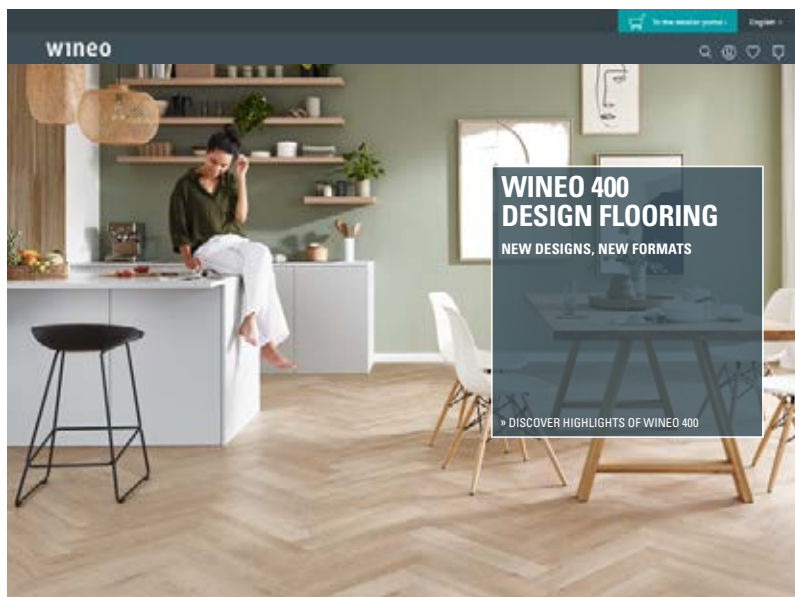

EN.WINEO.DE

Even more information is available on our website:

- dealer portal with direct ordering option
- our top reference projects
- tender specifications
- technical data sheets
- cleaning and installation instructions
- find a dealer
- video portal with lots of tips
- newsletter registration
- and much more

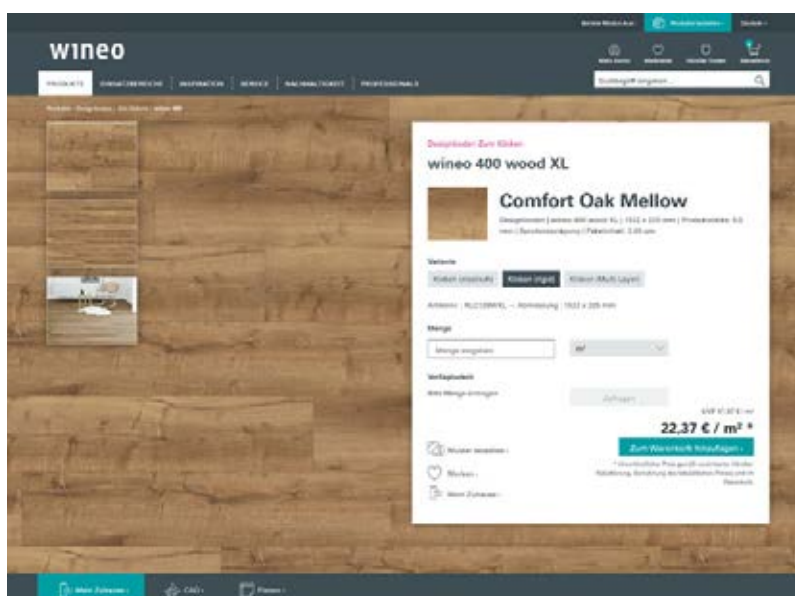

PARTNERPORTAL AT EN.WINEO.DE

- simple ordering of products
- real-time enquiry of product availability
- quick entry of orders
- order status and shipment tracking
- optimum customer advice with the advisor mode
- customised price list available
- access to image data for all products



SOCIAL MEDIA

Inspiration and product-specific knowledge in exciting short articles – you can discover under:

- Instagram
- Facebook
- YouTube
- Pinterest
- LinkedIn



WINEO FLOOR VIEWER

Any wineo floor can be simulated in your own home in an instant with our wineo Floor Viewer. The ideal way to choose the perfect flooring for you.

Test the wineo Floor Viewer now at **floorviewer.wineo.de** or by QR code.



TECHNICAL CHARACTERISTICS

Collection	wineo 400 wood XS	wineo 400 wood L				wineo 400 wood XL			wineo 400 stone L		
			Multi-Layer			Multi-Layer			Multi-Layer		
Installation type											
	Glue	Glue	Click	Click	Glue	Click	Click	Glue	Click	Click	
Connection	-		LocTec®	LocTec®	-	LocTec®	LocTec®	-	LocTec®	LocTec®	
Format	610 × 122 mm	1200 × 180 mm	1220 × 180 mm	1222 × 182 mm	1505 × 235 mm	1522 × 225 mm	1520 × 230 mm	610 × 305 mm	610 × 305 mm	601 × 310 mm	
Product thickness	2 mm	2 mm	5,5 mm	9 mm	2 mm	5,5 mm	9 mm	2 mm	5,5 mm	9 mm	
Wear layer	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	0,3 mm	
Weight	3,88 kg/m²	3,88 kg/m²	9,40 kg/m²	9,20 kg/m²	3,88 kg/m²	9,40 kg/m²	9,20 kg/m²	3,88 kg/m²	9,40 kg/m²	9,20 kg/m²	
Planks or tiles / box	24 / 1,79 m²	18 / 3,89 m²	10 / 2,20 m²	9 / 2,00 m²	12 / 4,24 m²	6 / 2,05 m²	6 / 2,10 m²	16 / 2,98 m²	10 / 1,86 m²	9 / 1,68 m²	
Boxes / pallet	140 / 250,60 m²	60 / 233,40 m²	48 / 105,60 m²	44 / 88,00 m²	60 / 254,40 m²	52 / 106,60 m²	52 / 109,20 m²	84 / 250,32 m²	60 / 111,60 m²	60 / 100,80 m²	
Surface treatment	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU	
Joint	micro bevel	micro bevel	micro bevel	micro bevel	micro bevel	V4	micro bevel	micro bevel	micro bevel	micro bevel	
Utilisation class EN ISO 10874	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	23 / 31	
Reaction to fire EN 13501-1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	
Anti slip category EN 16165	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	R 10	
Anti-static properties EN 1815	≤ 2 kV	≤ 2 kV	-	≤ 2 kV	≤ 2 kV	-	≤ 2 kV	≤ 2 kV	-	≤ 2 kV	
Staining / Chemical resistance EN ISO 26987	High resistance level depending on concentration and exposure time.										
Light fastness EN ISO 105-B02 (procedure 2)	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	
Residual indentation EN ISO 24343-1	≤ 0,1 mm	≤ 0,1 mm	≤ 0,2 mm	≤ 0,2 mm	≤ 0,1 mm	≤ 0,2 mm	≤ 0,2 mm	≤ 0,1 mm	≤ 0,2 mm	≤ 0,2 mm	
Suitability for underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C (Click and Multi-Layer) and 29 °C (Glue).										
Thermal resistance (m²K)/W EN12667	≤ 0,011	≤ 0,011	≤ 0,035	≤ 0,058	≤ 0,011	≤ 0,035	≤ 0,058	≤ 0,011	≤ 0,035	≤ 0,058	
Impact sound reduction EN ISO 16251-1	~ 4 dB	~ 4 dB	~ 19 dB	~ 14 dB	~ 4 dB	~19 dB	~ 14 dB	~ 4 dB	~ 19 dB	~ 14 dB	
Dimensional stability EN ISO 23999	≤ 0,15 %	≤ 0,15 %	≤ 0,1 %	-	≤ 0,15 %	≤ 0,1 %	-	≤ 0,15 %	≤ 0,1 %	-	
Guarantee	en.wineo.de/service/guarantee										



Utilisation class 23:
Domestic area with
intensive usage



Utilisation class 31:
Commercial sector with
low or occasional usage



Comfort Oak Nature

TECHNICAL CHARACTERISTICS

Collection	wineo 600 wood L		wineo 600 wood XL		wineo 600 stone XL		wineo 800 wood L	wineo 800 wood XL		wineo 800 stone XL
	Rigid		Rigid		Rigid			Multi-Layer		
Installation type	 Glue	 Click	 Glue	 Click	 Glue	 Click	 Glue	 Glue	 Click	 Glue
Connection	-	Fold-Down	-	Fold-Down	-	Fold-Down	-	-	LocTec®	-
Format	1200 × 180 mm	1212 × 186 mm	1505 × 235 mm	1507 × 234 mm	914 × 457 mm	746 × 477 mm	1200 × 180 mm	1505 × 235 mm	1520 × 230 mm	914 × 457 mm
Product thickness	2 mm	5 mm	2 mm	5 mm	2 mm	5 mm	2,5 mm	2,5 mm	9 mm	2,5 mm
Wear layer	0,4 mm	0,4 mm	0,4 mm	0,4 mm	0,4 mm	0,4 mm	0,55 mm	0,55 mm	0,55 mm	0,55 mm
Weight	3,44 kg/m²	10,10 kg/m²	3,44 kg/m²	10,10 kg/m²	3,44 kg/m²	10,10 kg/m²	4,40 kg/m²	4,40 kg/m²	9,60 kg/m²	4,40 kg/m²
Planks or tiles / box	18 / 3,89 m²	8 / 1,80 m²	12 / 4,24 m²	6 / 2,12 m²	12 / 5,01 m²	6 / 2,14 m²	16 / 3,46 m²	12 / 4,24 m²	6 / 2,10 m²	8 / 3,34 m²
Boxes / pallet	60 / 233,40 m²	56 / 100,80 m²	64 / 271,36 m²	48 / 101,76 m²	52 / 260,52 m²	44 / 94,16 m²	60 / 207,60 m²	52 / 220,48 m²	52 / 109,20 m²	64 / 213,76 m²
Surface treatment	PU	PU	PU	PU	PU	PU	PU	PU	PU	PU
Joint	micro bevel	micro bevel	micro bevel	micro bevel	micro bevel	real joint	micro bevel	micro bevel	micro bevel	micro bevel
Utilisation class EN ISO 10874	23 / 32 / 41	23 / 32	23 / 32 / 41	23 / 32	23 / 32 / 41	23 / 32	23 / 33 / 42	23 / 33 / 42	23 / 33	23 / 33 / 42
Reaction to fire EN 13501-1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1	B _{fl} – s1
Anti slip category DIN 51130	R 9	R 9	R 9	R 9	R 9	R 9	R 10	R 10	R 10	R 10
Anti-static properties EN 1815	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	-	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
Staining / Chemical resistance EN ISO 26987	High resistance level depending on concentration and exposure time.*									
Light fastness EN ISO 105-B02 (procedure 2)	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Residual indentation EN ISO 24343-1	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm	≤ 0,1 mm
Suitability for underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C (Click and Multi-Layer) and 29 °C (Glue).									
Thermal resistance (m²K)/W EN12667	≤ 0,011	≤ 0,05	≤ 0,011	≤ 0,05	≤ 0,011	≤ 0,05	≤ 0,012	≤ 0,012	≤ 0,058	≤ 0,012
Impact sound reduction EN ISO 16251-1	~ 4 dB	~ 6 dB	~ 4 dB	~ 6 dB	~ 4 dB	~ 6 dB	~ 4 dB	~ 4 dB	~ 14 dB	~ 4 dB
Dimensional stability EN ISO 23999	≤ 0,15 %	≤ 0,1 %	≤ 0,15 %	≤ 0,1 %	≤ 0,15 %	≤ 0,1 %	≤ 0,15 %	≤ 0,15 %	-	≤ 0,15 %
Guarantee	en.wineo.de/service/guarantee									



Utilisation class 23:
Domestic area with
intensive usage




Utilisation class 32:
Normal use in the
commercial sector



Utilisation class 33:
Commercial sector
with heavy usage



Utilisation class 41:
Light industry sector
with moderate usage



Utilisation class 42:
Normal use in the
light industrial sector

*For wineo 600 rigid:
Resistance to staining EN 438-2
Group 1 + 2: Measurement 5
Group 3: Measurement 4



- Cleaning and maintenance instructions online at www.wineo.de/Service
- All decors shown in this brochure are reproductions. Windmüller GmbH provides no guarantee with regard to mistakes, printing errors and technical changes.



Windmüller GmbH
info@wineo.de
www.wineo.de

Member of

FEB **ERFMI** **DGNB**

