

**wineo**

THAT'S FLOORING

**NEW**



**wineo 1000**

**PURLINE ORGANIC FLOORING**

**BEST INGREDIENTS  
FOR HEALTHY LIVING**

\_CERTIFIED SUSTAINABILITY  
\_PROVEN HEALTHY LIVING  
\_STATE OF THE ART MATERIAL QUALITY  
\_FUTURE-PROOF DESIGN  
\_LIFETIME GUARANTEE  
\_HIGH DURABILITY  
\_EASY INSTALLATION  
\_MADE IN GERMANY  
\_WITHOUT THE ADDITION OF CHLORINE  
\_WITHOUT PLASTICISERS  
\_WITHOUT SOLVENTS

THAT'S  
FLOORING

## CONTENT

Healthy living	05
Best ingredients	06
Healthy homes	09
<b>NEW</b> Trends	10
Product advantages	15
Product composition	16
<b>NEW</b> NatureSurface	21
<b>NEW</b> Premium and Basic	22
<b>wineo 1000</b> wood XL	25
<b>wineo 1000</b> wood L   stone L	31
PERFECT FIT accessories	40
Service	41
Certifications	42
Technical data	44







**NATURALLY  
SUSTAINABLE**

Rustic Oak Nougat  
wineo 1000 wood XL | Elastic | PL315R  
wineo 1000 wood XL | Elastic | PLC315R  
wineo 1000 wood XL Multi-Layer | Rigid | MLP315R

## BEST INGREDIENTS FOR HEALTHY LIVING

Living in harmony with health and nature, feeling safe and secure within our homes, that is our aspiration. That is why we attach so much importance to the best ingredients for the best-ever ambience in the home.

Our comfortable, elastic PURLINE organic flooring is manufactured to our own formulations. We use the best raw materials for it. You can breathe freely indoors and be sure that you are doing the best for your family.





# THE QUALITY SEAL FOR MODERN LIVING



PURLINE organic flooring is a specialist polyurethane flooring with the best natural ingredients such as plant oils and mineral components.

It is based on ecuran, the innovative high-performance composite material which takes environmental aspects into consideration as well as being sustainable and satisfying modern demands.

PURLINE organic flooring combines all the benefits that modern floors need to have: it is especially high-performance, the authentic designs are impressive and it is natural. Based on mainly natural and renewable raw materials, it is produced entirely in the Eastern Westphalia region of Germany **without the addition of chlorine, plasticisers or solvents.**

**MADE IN GERMANY**

## CASTOR OIL

Plant oils replace the majority of petrochemical polyols in the polyurethane formulation. Castor oil, extracted from castor beans, mostly comes from India and is typically grown by small-scale farmers who also use it as a protective plant for agricultural land. Castor oil plant cultivation is socially responsible; it is not grown in monocultures or on cleared land and does not compete with food farming. Similarly high criteria apply to alternative plant oils. Windmüller processes over 7,000 tonnes of castor oil every year. wineo has recently joined the first global programme for the sustainable cultivation of castor beans.

Find out more at [en.wineo.de](https://en.wineo.de)

# DID YOU KNOW?



## SUSTAINABILITY

because that's what we believe in

- with the high-performance composite material ecuran
- usage of renewable raw materials and natural fillers
- easy to dispose of
- environmentally award-winning (see pages 42/43)
- completely odour-neutral and promotes wellbeing



## HIGH-PERFORMANCE

for everyday use

- lifetime guarantee **NEW**
- tested resilience
- for domestic through to light industrial use
- low lifecycle costs
- UV-resistant and temperature-stable
- outstanding residual indentation performance



## DESIGN DIVERSITY

eye-catching aesthetics

- over 150 decors in four collections
- 15 different formats
- for gluing and clicking in
- on the roll or as planks
- modern, colourful and creative designs
- authentic-looking surface
- all-round V4 joint



**NATURALLY  
HARMLESS**

**Calm Oak Ash**  
wineo 1000 wood XL | Elastic | PL308R  
wineo 1000 wood XL | Elastic | PLC308R  
wineo 1000 wood XL Multi-Layer | Rigid | MLP308R

## BEST INGREDIENTS FOR HEALTHY HOMES

Live everyday life with materials that are harmless in every respect. Allowing you to always breathe easily – this is what healthy homes are all about. PURLINE organic flooring makes an important contribution as it does not emit any harmful substances into the indoor air, it is odourless, quiet and gentle on the joints. Its properties make it perfect and safe for family homes. It can be used without hesitation as a healthy floor from children's rooms to kitchens.



**80–90% of our lives are spent in enclosed spaces.**



**An adult takes 20,000 breaths every day, a child even more.**



**1/3 of all Europeans suffer with asthma or allergies.**



**Only 28% of all people have sufficient ventilation during winter.**

**DID YOU  
KNOW?**



# BEST INGREDIENTS FOR A COORDINATED INTERIOR


Taking into account current design and colour trends based on the very latest trend research, four central themes have been created, for which a large assortment of matching surface designs have been developed. Discover our interior colour recommendations.



FEEL IT

SENSUAL LIFE

MUTED  
DISCERNING  
CALM



GO UP

FOUND CREATION

FRESH  
OPTIMISTIC  
COLOURFUL









# NATURALLY RESILIENT

Natural Pine Beach  
wineo 1000 wood L | Elastic | PL297R  
wineo 1000 wood L | Elastic | PLC297R  
wineo 1000 wood L Multi-Layer | Rigid | MLP297R



## DURABLE

wineo organic flooring is **stain resistant** and scores well with high resilience.



## EASY CARE

The polyurethane surface makes the organic flooring **easy to clean** and maintain.



## UV-RESISTANT

Ready for summer: PURLINE organic flooring has a high light fastness and **an excellent UV resistance**.



## NON-SLIP

The tested surface ensures **safety with every step**.



## SUITABLE FOR HIGH HUMIDITY AREAS

In the **kitchen or bathroom**: PURLINE organic flooring performs in every situation.



## UNDERFLOOR HEATING

The organic flooring quickly warms up on top of underfloor heating, **saving lots of energy**.



## LOW-EMISSION

Take a deep breath: PURLINE organic flooring emits **no harmful substances** into the atmosphere.



## ODOUR NEUTRAL

PURLINE gives off **no unpleasant odours**.



## MINIMAL SMOKE

Even in the event of fire: **low smoke emission**. Escape routes remain more visible.



## QUIET

The soft surface ensures **pleasantly quiet acoustics**.



## WARM TO THE FEET

The organic flooring **feels pleasantly warm** and is perfect for everyday life at home.



## GENTLE ON THE ANKLES

**Health-conscious**: The elastic surface is gentle on the joints.




# PRODUCT COMPOSITION

## ELASTIC ORGANIC FLOORING FOR GLUING



Perfect solution for:

- even subsurfaces (new buildings)
- prepared subsurfaces (renovations)
- existing floor coverings (DIN 18202)  
in combination with silentPREMIUM underlay mat

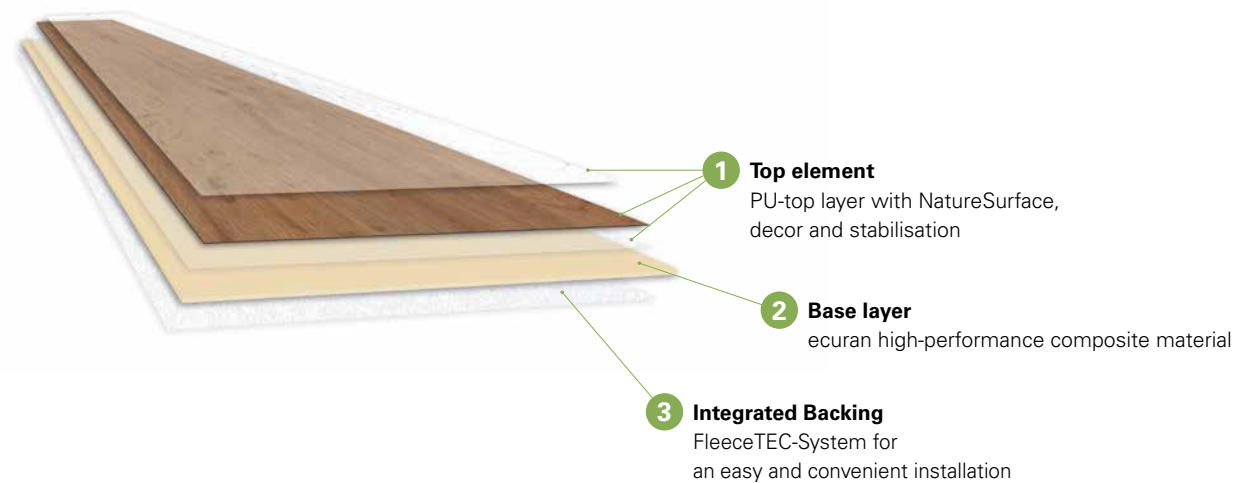

i

## SPECIAL PRODUCT FEATURES

- low installation height of 2.2 mm
- perfect heat distribution when used over underfloor heating
- simple cutting to size with a cutter knife

## INSTALLATION OPTIONS

### 1. STANDARD GLUING

- 1.1** firm bond with the existing subsurface
- 1.2** bonds to the downward self-adhesive silentPLUS underlay mat

### 2. REMOVABLE DIY GLUING


- installation on silentPREMIUM self-adhesive underlay mat
- no gluing to the subsurface
- easy, fast and clean to install without liquid adhesives
- can be walked on immediately and is easy to remove

## ELASTIC ORGANIC FLOORING FOR CLICKING IN



Perfect solution for:

- even subsurfaces (new buildings)
- prepared subsurfaces (renovations)

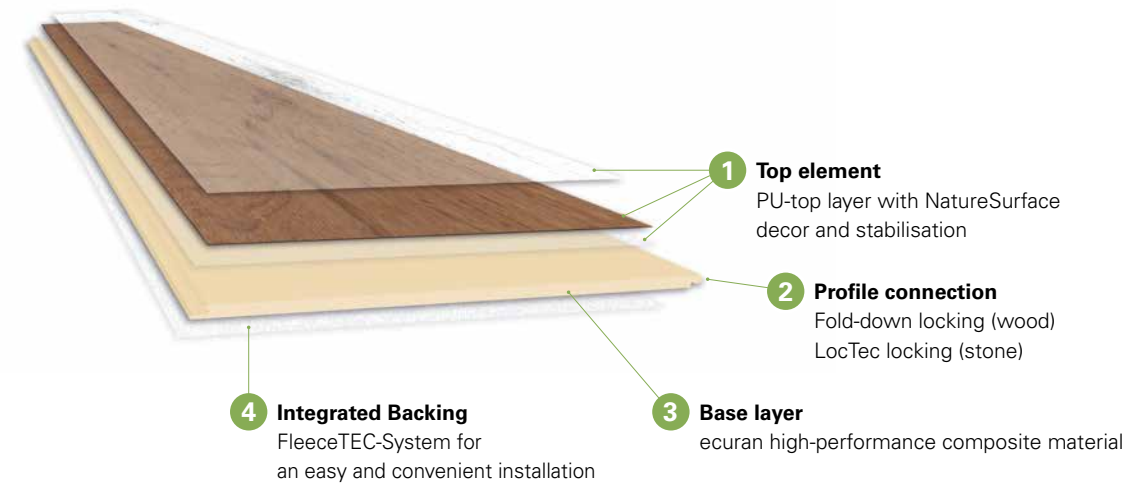

i

## SPECIAL PRODUCT FEATURES

- low installation height of 5 mm
- perfect heat distribution when used over underfloor heating
- quick and easy installation thanks to proven click connection
- simple cutting to size with a cutter knife

## INSTALLATION OPTIONS


### 1. FLOATING

- directly onto the prepared subsurface
- installation on stabilising silentComfort underlay mat
- can be walked on immediately and is easy to remove

MULTI-LAYER | RIGID ORGANIC FLOORING FOR CLICKING IN

Perfect solution for:

- subsurfaces with slight unevenness (renovations)
- bridging height differences (new buildings)

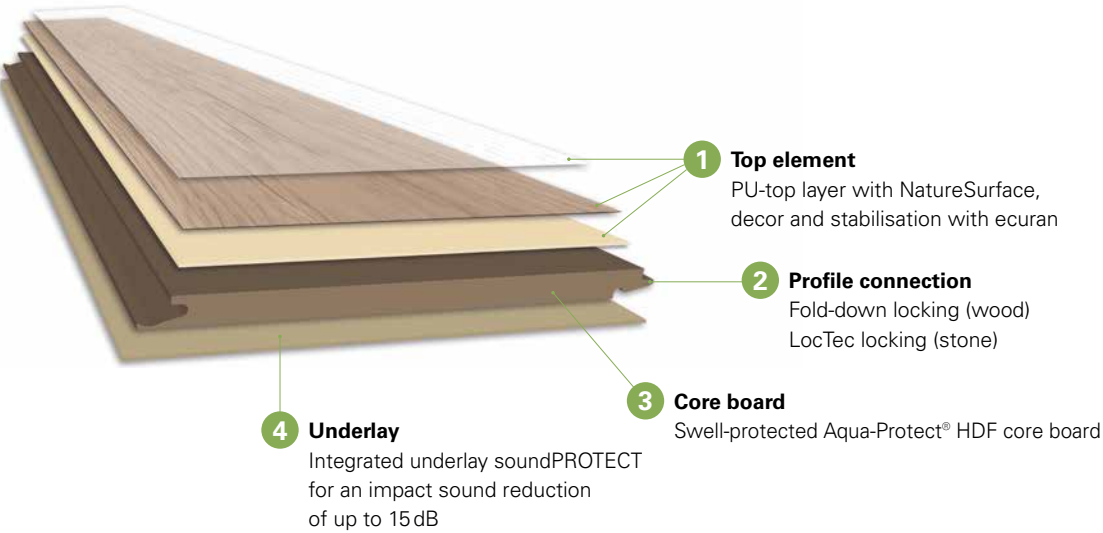

SPECIAL PRODUCT FEATURES

- practical installation height of 9 mm
- Tele-Stop: Minor irregularities in the subfloor will not show up
- Install-Ready: integrated underlay mat cuts refurbishment times and reduces walking and impact sounds by up to 15 dB
- quick and easy installation thanks to proven click connection
- cutting to size with a saw or laminate cutter

INSTALLATION OPTIONS

- 1. FLOATING**
- direct installation on the subsurface
  - PE vapour barrier for installation on mineral subsurfaces
  - can be walked on immediately and is easy to remove

More information is available in our installation guides: see [en.wineo.de](http://en.wineo.de)



Rustic Oak Ginger  
wineo 1000 wood XL | Elastic | PL314R  
wineo 1000 wood XL | Elastic | PLC314R  
wineo 1000 wood XL Multi-Layer | Rigid | MLP314R

NATURALLY  
VERSATILE




NEW

## INSPIRED BY NATURE

The distinguishing feature of wineo 1000 is the **NatureSurface** texture. The special finish on this flooring recreates the traditional brushing technique and therefore belongs in the premier class of natural elastic floor coverings.

The various textures are matched to the individual designs and have an impressive ultra-matt finish. The result is organic flooring with an exceptional look and feel, and an authenticity as never seen before.

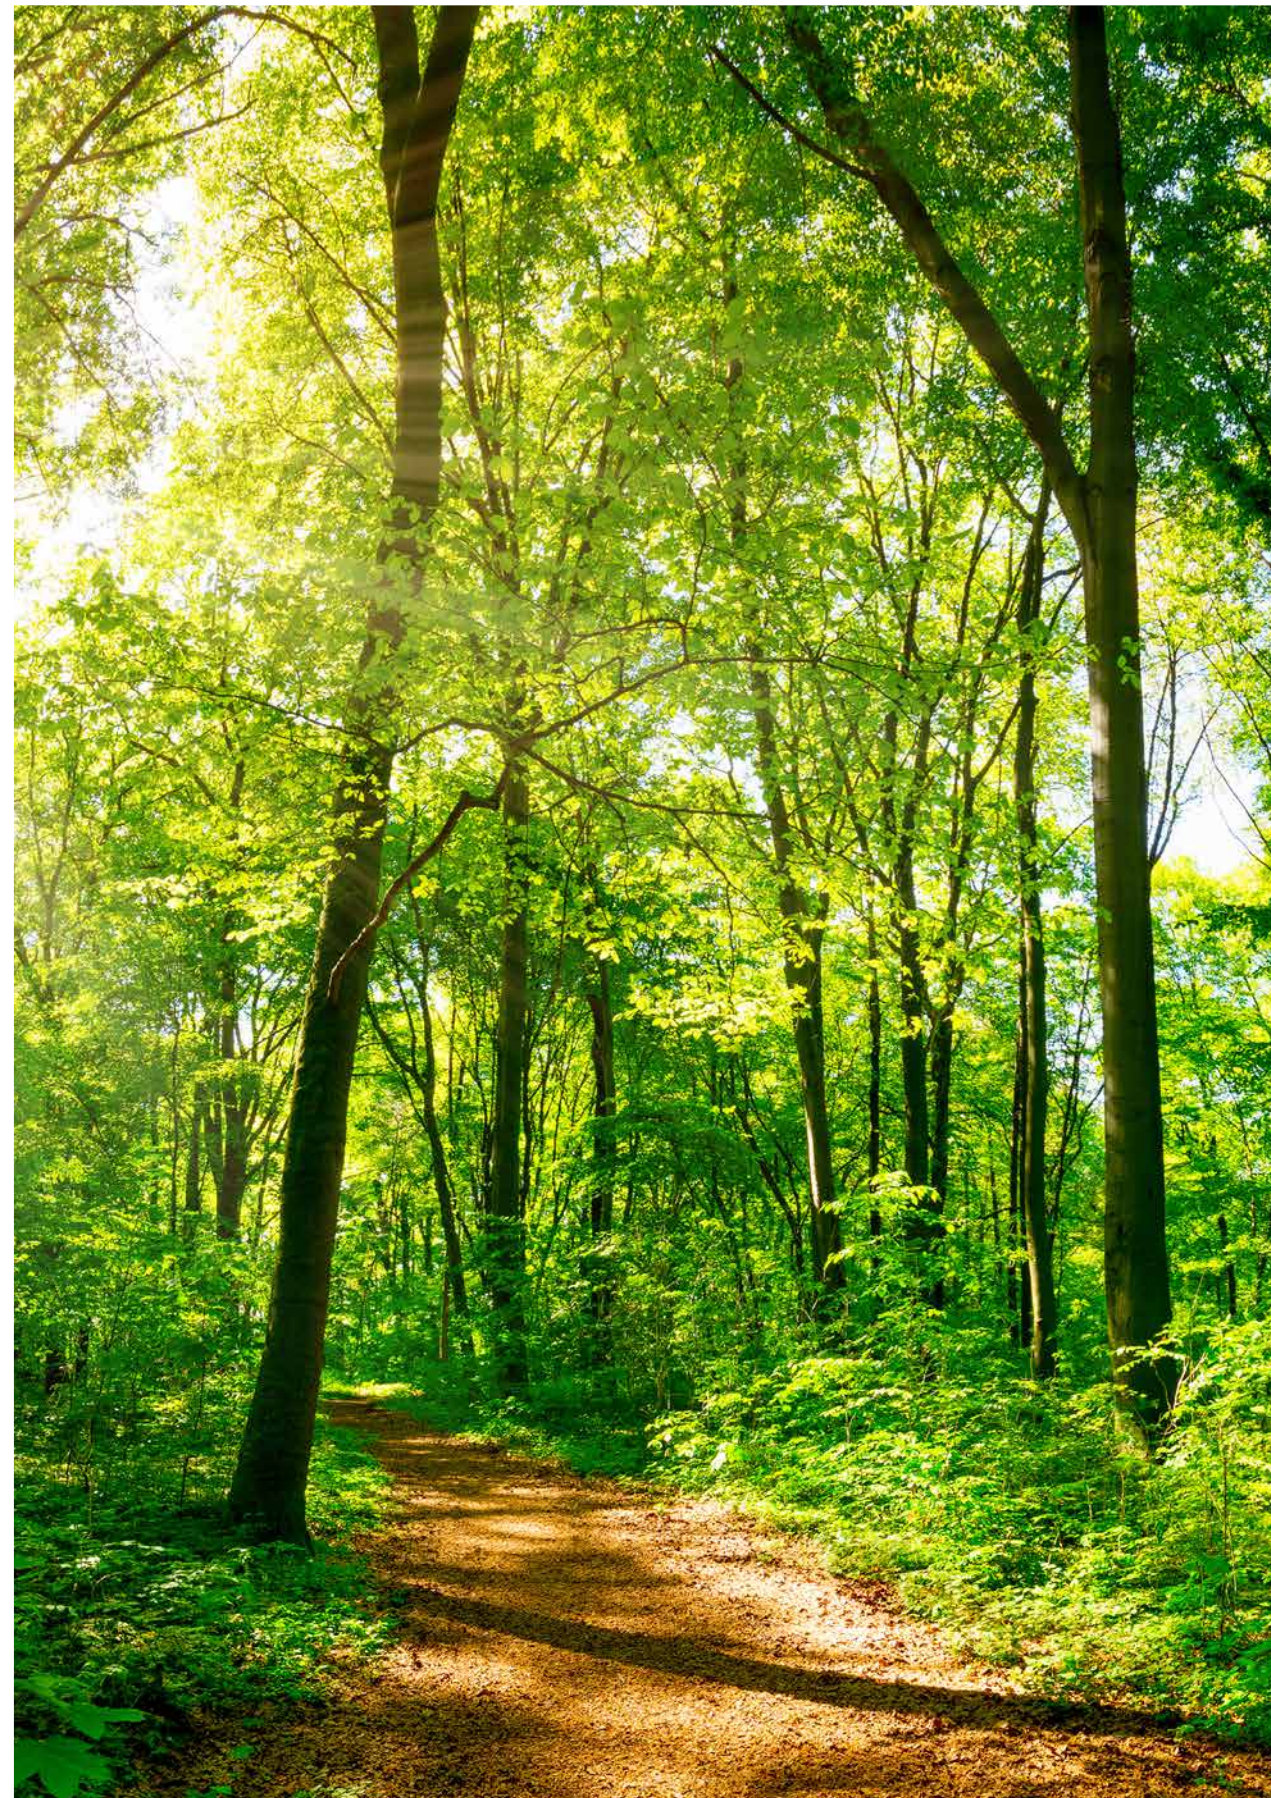

**NATURALLY  
AUTHENTIC**



**NatureSurface**

The innovative technology



NEW

# ONE PRODUCT TWO VERSIONS

Two product lines, Premium and Basic, have been created to introduce PURLINE organic flooring for healthy homes in a natural look. Each version has its own persuasive features.

## WOOD XL

- brushed matt NatureSurface
- high-quality 1-strip wide plank in an XL-format
- striking, milled V-joint to emphasise the plank format
- 21 different planks for each decor
- no noticeable repeats
- supremely authentic wood effects



PREMIUM

## WOOD L | STONE L

- brushed matt NatureSurface
- planks and tiles in classic L-format
- micro-bevel all round for a smooth overall look
- 10 different planks/tiles per decor



BASIC



NATURALLY  
INDIVIDUAL

Rustic Oak Ginger  
wineo 1000 wood XL | Elastic | PL314R  
wineo 1000 wood XL | Elastic | PLC314R  
wineo 1000 wood XL Multi-Layer | Rigid | MLP314R





**NATURALLY  
UNIQUE**

Calm Oak Ash  
wineo 1000 wood XL | Elastic | PL308R  
wineo 1000 wood XL | Elastic | PLC308R  
wineo 1000 wood XL Multi-Layer | Rigid | MLP308R



**wineo 1000** wood XL

## **SIMPLY FIRST CLASS**


Closer to nature than ever before – The high-performance, natural PURLINE organic flooring is now available for the first time with NatureSurface, which provides the flooring with an impressive authentic look. The authenticity of the planks is underlined in particular with a all-round V4 joint.

The Premium version is available in 12 oak decors in the popular XL format.

**PREMIUM**

wineo 1000 wood XL

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1500 × 250 mm	1507 × 246 mm	1520 × 238 mm
Product thickness:	2.2 mm	5 mm	9 mm
Planks / Box:	14/5.25 m²	6/2.22 m²	6/2.17 m²

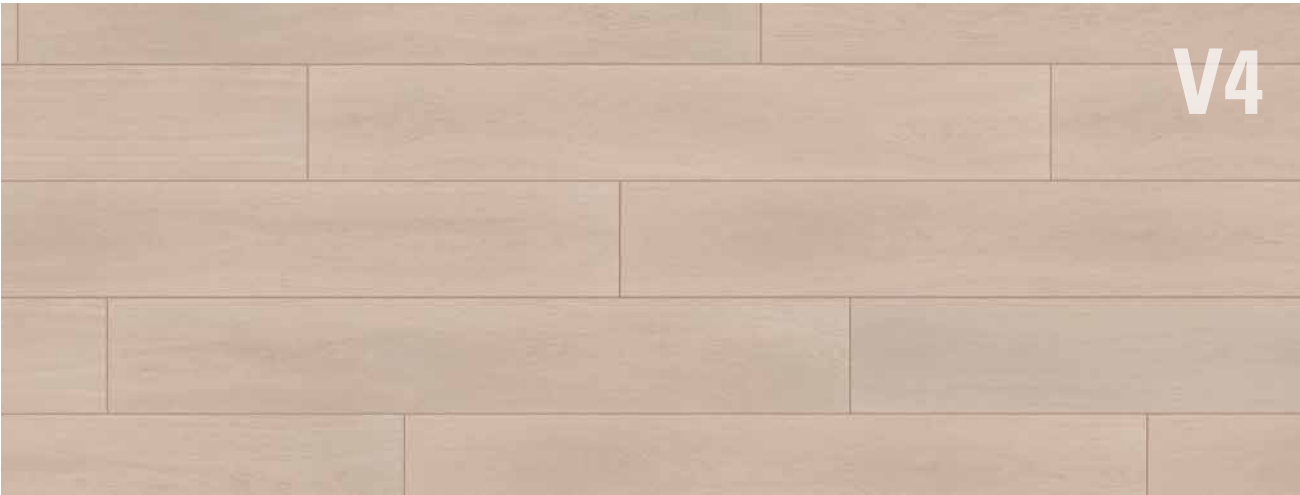

Installed area Calm Oak Bright | [PL305R](#) – [PLC305R](#) – [MLP305R](#) | lacquered, all-round joint (V4)



Calm Oak Bright | [PL305R](#) – [PLC305R](#) – [MLP305R](#) | lacquered, all-round joint (V4)

FEEL IT



Calm Oak Shell | [PL306R](#) – [PLC306R](#) – [MLP306R](#) | lacquered, all-round joint (V4)

FEEL IT



Calm Oak Mocca | [PL307R](#) – [PLC307R](#) – [MLP307R](#) | lacquered, all-round joint (V4)

LOOK BACK



Calm Oak Ash | [PL308R](#) – [PLC308R](#) – [MLP308R](#) | lacquered, all-round joint (V4)

GO UP

wineo 1000 wood XL

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1500 × 250 mm	1507 × 246 mm	1520 × 238 mm
Product thickness:	2.2 mm	5 mm	9 mm
Planks / Box:	14/5.25 m²	6/2.22 m²	6/2.17 m²



Installed area Noble Oak Powder | [PL309R](#) – [PLC309R](#) – [MLP309R](#) | lacquered, all-round joint (V4)



Noble Oak Powder | [PL309R](#) – [PLC309R](#) – [MLP309R](#) | lacquered, all-round joint (V4)

FEEL IT



Noble Oak Vanilla | [PL310R](#) – [PLC310R](#) – [MLP310R](#) | lacquered, all-round joint (V4)

TALK ABOUT



Noble Oak Toffee | [PL311R](#) – [PLC311R](#) – [MLP311R](#) | lacquered, all-round joint (V4)

TALK ABOUT



Noble Oak Chocolate | [PL312R](#) – [PLC312R](#) – [MLP312R](#) | lacquered, all-round joint (V4)

LOOK BACK



# wineo 1000 wood XL

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1500 × 250 mm	1507 × 246 mm	1520 × 238 mm
Product thickness:	2.2 mm	5 mm	9 mm
Planks / Box:	14/5.25 m²	6/2.22 m²	6/2.17 m²



Installed area Rustic Oak Taupe | [PL313R](#) – [PLC313R](#) – [MLP313R](#) | lacquered, all-round joint (V4)



Rustic Oak Taupe | [PL313R](#) – [PLC313R](#) – [MLP313R](#) | lacquered, all-round joint (V4)

GO UP



Rustic Oak Ginger | [PL314R](#) – [PLC314R](#) – [MLP314R](#) | lacquered, all-round joint (V4)

TALK ABOUT



Rustic Oak Nougat | [PL315R](#) – [PLC315R](#) – [MLP315R](#) | lacquered, all-round joint (V4)

LOOK BACK



Rustic Oak Coffee | [PL316R](#) – [PLC316R](#) – [MLP316R](#) | lacquered, all-round joint (V4)

LOOK BACK



NATURALLY  
HARMONIOUS

Rustic Oak Nougat  
wineo 1000 wood XL | Elastic | [PL315R](#)  
wineo 1000 wood XL | Elastic | [PLC315R](#)  
wineo 1000 wood XL Multi-Layer | Rigid | [MLP315R](#)





**NATURALLY  
TRENDY**

Strong Oak Cappuccino  
wineo 1000 wood L | Elastic | PL303R  
wineo 1000 wood L | Elastic | PLC303R  
wineo 1000 wood L Multi-Layer | Rigid | MLP303R

**wineo 1000** wood L | stone L

## **SIMPLY STRAIGHTFORWARD**

The 10 popular wood designs and 4 stone decors form a timeless basis for any current home interior trend.

Complete with a micro-bevel and matt finish, this flooring will captivate with its tranquil overall effect and natural look. A classic for any room!

**BASIC**



wineo 1000 wood L

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1298 × 199mm	1295 × 195mm	1288 × 187mm
Product thickness:	2.2mm	5mm	9mm
Planks / Box:	20/5.17m²	8/2.02m²	8/1.93m²



Installed area Light Maple Cream | [PL296R](#) – [PLC296R](#) – [MLP296R](#) | micro-bevel all round



Light Maple Cream | [PL296R](#) – [PLC296R](#) – [MLP296R](#) | micro-bevel all round

FEEL IT



Installed area Natural Pine Beach | [PL297R](#) – [PLC297R](#) – [MLP297R](#) | micro-bevel all round



Natural Pine Beach | [PL297R](#) – [PLC297R](#) – [MLP297R](#) | micro-bevel all round

GO UP

wineo 1000 wood L

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1298 × 199mm	1295 × 195mm	1288 × 187mm
Product thickness:	2.2mm	5mm	9mm
Planks / Box:	20/5.17 m²	8/2.02 m²	8/1.93 m²



Installed area Comfort Oak Sand | [PL298R](#) – [PLC298R](#) – [MLP298R](#) | micro-bevel all round



Comfort Oak Sand | [PL298R](#) – [PLC298R](#) – [MLP298R](#) | micro-bevel all round

GO UP

# wineo 1000 wood L

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2.2 mm	5 mm	9 mm
Planks / Box:	20/5.17 m²	8/2.02 m²	8/1.93 m²



Installed area Intensive Oak Honey | PL299R – PLC299R – MLP299R | micro-bevel all round



Intensive Oak Honey | PL299R – PLC299R – MLP299R | micro-bevel all round

TALK ABOUT



Intensive Oak Caramel | PL300R – PLC300R – MLP300R | micro-bevel all round

TALK ABOUT



Intensive Oak Honey  
wineo 1000 wood L | Elastic | PL299R  
wineo 1000 wood L | Elastic | PLC299R  
wineo 1000 wood L Multi-Layer | Rigid | MLP299R

NATURALLY  
INVITING



wineo 1000 wood L

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2.2 mm	5 mm	9 mm
Planks / Box:	20/5.17 m²	8/2.02 m²	8/1.93 m²



Installed area Strong Oak Cinnamon | [PL301R](#) – [PLC301R](#) – [MLP301R](#) | micro-bevel all round



Strong Oak Cinnamon | [PL301R](#) – [PLC301R](#) – [MLP301R](#) | micro-bevel all round

[LOOK BACK](#)



Strong Oak Cappuccino | [PL303R](#) – [PLC303R](#) – [MLP303R](#) | micro-bevel all round

[LOOK BACK](#)

wineo 1000 wood L

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm
Product thickness:	2.2 mm	5 mm	9 mm
Planks / Box:	20/5.17 m²	8/2.02 m²	8/1.93 m²



Installed area Soft Oak Salt | [PL295R](#) – [PLC295R](#) – [MLP295R](#) | micro-bevel all round



Soft Oak Salt | [PL295R](#) – [PLC295R](#) – [MLP295R](#) | micro-bevel all round

[GO UP](#)



Soft Oak Pepper | [PL304R](#) – [PLC304R](#) – [MLP304R](#) | micro-bevel all round

[LOOK BACK](#)



Soft Oak Silver | [PL302R](#) – [PLC302R](#) – [MLP302R](#) | micro-bevel all round

[FEEL IT](#)

wineo 1000 stone L

Installation type:	Glue   Elastic	Click   Elastic	Click   Multi-Layer   Rigid
Format:	645 × 335 mm	642 × 330.5 mm	636 × 319 mm
Product thickness:	2.2 mm	5 mm	9 mm
Planks / Box:	22/4.75 m²	10/2.12 m²	9/1.83 m²



Urban Concrete Light | [PL317R](#) – [PLC317R](#) – [MLP317R](#)  
micro-bevel all round

FEEL IT



Urban Concrete Smoke | [PL318R](#) – [PLC318R](#) – [MLP318R](#)  
micro-bevel all round

GO UP



Urban Concrete Steel | [PL319R](#) – [PLC319R](#) – [MLP319R](#)  
micro-bevel all round

TALK ABOUT



Urban Concrete Dark | [PL320R](#) – [PLC320R](#) – [MLP320R](#)  
micro-bevel all round

LOOK BACK



Urban Concrete Light  
wineo 1000 stone L | Elastic | [PL317R](#)  
wineo 1000 stone L | Elastic | [PLC317R](#)  
wineo 1000 stone L Multi-Layer | Rigid | [MLP317R](#)

NATURALLY  
ROBUST



# PERFECT FIT ACCESSORIES

## UNDERLAYS

We recommend using our polyurethane underlay material with wineo 1000.

The basis is provided by ecuran, a high-performance composite material that is manufactured primarily from plant-based oils such as canola oil or castor oil and naturally-occurring mineral components such as chalk.

- **fast, energy-efficient distribution of ground heat**
- **excellent noise reduction with hard and soft floor coverings**
- **long-life performance of at least 30 years**
- **outstanding residual indentation behaviour**
- **sustainable raw materials**
- **without chlorine, plasticisers or solvents**



Detailed information can be found in our accessories brochure. (Art.-no. 20091021)

Download now:



## SKIRTINGS

- decor matching MDF skirtings for all wineo floors
- universally usable skirtings in MDF as well as plastic/aluminium
- installation heights from 60 mm to 100 mm
- plastic mounting clips included in the range of accessories; alternatively glue or tack
- self-adhesive corner elements for easy installation




## PROFILES

- Comfort Profiles (self-adhesive profiles) for DIYers
- Premium Profiles (screwable profiles) for professionals
- profile types for different applications: Transition, Adjustment and End profiles, L-End profiles, expansion joint profile, Angle profiles and stair nosing profiles



# SERVICE

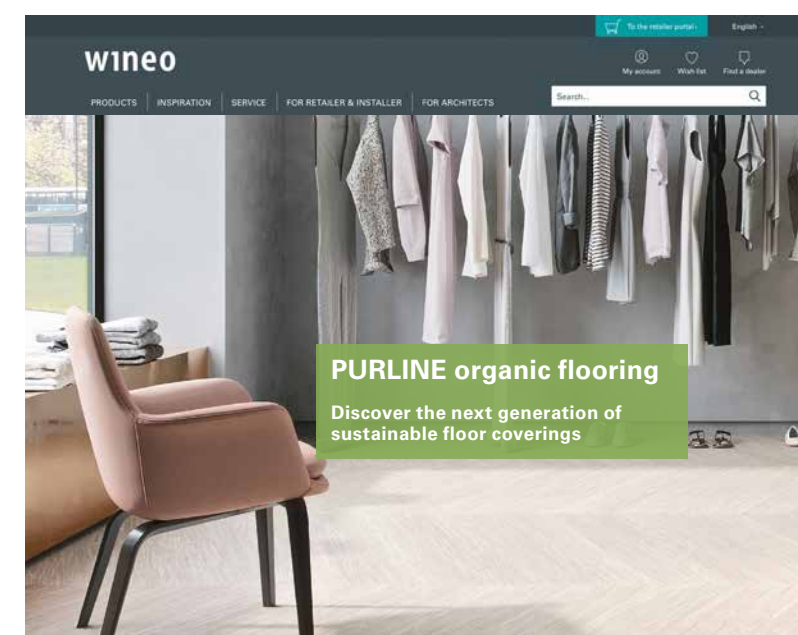

## WINEO WORKSPACE & VIRTUAL SHOWROOM

Discover the whole world of wineo flooring on 2,000 square metres of our workspace, the showroom at our Augustdorf site. Every wineo floor covering is available here to discover and touch. Or go on a virtual voyage of discovery from the comfort of your own home and marvel at our new products in our virtual showroom.



## EN.WINEO.DE

Even more information is available on our website:

- dealer portal with direct ordering option
- our top reference projects
- tender specifications
- technical data sheets
- cleaning and installation instructions
- find a dealer
- video portal with lots of tips
- newsletter registration









## WINEO FLOOR VIEWER

Any wineo floor can be simulated in your own home in an instant with our wineo Floor Viewer. The ideal way to choose the perfect flooring for you.

Test the wineo Floor Viewer now at [floorviewer.wineo.de](https://floorviewer.wineo.de) or by QR code.



# GUARANTEED HEALTHY LIVING

Environmental certifications		
	<p><b>cradle to cradle®</b></p> <p>The cradle to cradle® certification confirms the utilisation of environmentally safe, healthy and reusable materials (technical reutilisation) and the use of solar power or other regenerative sources of energy, together with responsible water stewardship and strategies adopted by a company to embrace its responsibility to society.</p>	✓
 <div><a href="http://www.blauer-engel.de/uz120">www.blauer-engel.de/uz120</a> <a href="http://www.blauer-engel.de/uz156">www.blauer-engel.de/uz156</a> <a href="http://www.blauer-engel.de/uz176">www.blauer-engel.de/uz176</a></div>	<p><b>Blue Angel (Blauer Engel)</b></p> <p>The “Blue Angel” guarantees that our products and services fulfil high requirements placed on environmental, health and usage properties. Criteria are compiled for each product group, which are checked every three to four years by the Federal Environment Agency.</p>	✓
	<p><b>Austrian eco-label (Österreichisches Umweltzeichen)</b></p> <p>The “Österreichisches Umweltzeichen” (Austrian eco-label) assesses products from quality, health-related and ecological standpoints. Basically, products can only be certified if they are harmless health-wise. The fulfilment of the criteria is checked every four years.</p>	✓
	<p><b>Greenguard</b></p> <p>DThe Greenguard certificate ensures that a product fullfils the strictest and most comprehensive requirements for emissions of Volatile Organic Compounds (VOCs) into the air.</p>	✓
	<p><b>Declare</b></p> <p>Voluntary self-disclosure programme aimed at transforming the building materials industry into a healthier and more environmentally friendly product through transparency of ingredients used. By participating in Declare, manufacturers are obligated to disclose all ingredients.</p>	✓
	<p><b>M1</b></p> <p>Just like the “Blue Angel” quality mark in Germany, the M1 seal in the Finnish market labels our products as environmentally friendly, health-friendly and consumer-friendly. The focus is on emissions of Volatile Organic Compounds (VOCs).</p>	✓
	<p><b>A+</b></p> <p>Just like the “Blue Angel” in Germany, the A+ seal identifies our products as ecological, healthy and user-friendly in the French market.</p>	✓
	<p><b>TFI-TÜV PROFICERT PREMIUM for Multi-Layer</b></p> <p>The TFI (Textiles &amp; Flooring Institute GmbH) and the TÜV Hessen evaluate products based on qualitative, health and ecological principals. Fundamentally, only products that are considered harmless to health can be certified.</p>	✓

Environmental certifications		
	<p><b>eco-bau Switzerland (eco-bau Schweiz)</b></p> <p>Eco-Bau assesses the ecological aspects of building materials and services. It encompasses all of the significant environmental effects during the entire lifespan of the materials. The assessment is made on the basis of the following criteria: conservation of natural resources, energy for producing materials, solvent emissions, presence of environmentally and health-damaging components, emission of heavy metals and other damaging substances.</p>	✓
	<p><b>FloorScore®</b></p> <p>With SCS Global Services' FloorScore® certificate program manufacturers of floor coverings can assess the conformity of their products with the emission requirements in the U.S. but also worldwide utilized building evaluation systems, such as LEED clearly.</p>	✓
Building certification / Product declaration		
	<p><b>BREEAM</b></p> <p>The British sustainability certificate for development projects is used in 15 other countries.</p>	✓
	<p><b>DGNB</b></p> <p>Certification system of the German Sustainable Building Council and the Federal Ministry of Transport, Building and Urban Affairs. Evaluates a building's quality over its entire life cycle and is internationally applicable.</p>	✓
	<p><b>LEED</b></p> <p>Rating system of the US Green Building Council. It considers the regional and local criteria according to global standards. The use of building materials with cradle to cradle proof is evaluated with bonus points.</p>	✓
	<p><b>WELL</b></p> <p>The WELL Building Standard (WELL) focuses on health and well-being of the people within in the building.</p>	✓
	<p><b>EPD</b></p> <p>The environmental product declarations is a transparency tool for the sustainability valuation of products. It is the basis for sustainability calculations for buildings.</p>	✓
Information platforms		
	<p><b>Sentinel Haus Institut</b></p> <p>The Sentinel Haus Institut is a leading engineering service provider and knowledge leader for more healthy building, refurbishment and renovation.</p>	✓
	<p><b>Heinze</b></p> <p>Germany's leading information platform for building products, company profiles and architectural projects.</p>	✓

SUSTAINABLE FOR NATURE.  
WELLBEING FOR PEOPLE.



# NATURALLY HIGH-PERFORMANCE

	PREMIUM			BASIC					
wineo 1000	wood XL   Elastic	wood XL   Elastic	wood XL Multi-Layer   Rigid	wood L   Elastic	wood L   Elastic	wood L Multi-Layer   Rigid	stone L   Elastic	stone L   Elastic	stone L Multi-Layer   Rigid
Installation type	to glue	to click	to click	to glue	to click	to click	to glue	to click	to click
Locking	-	Fold-Down	Fold-Down	-	Fold-Down	Fold-Down	-	LocTec	LocTec
Joint	V4	V4	V4	-	-	-	-	-	-
Format	1500 × 250 mm	1507 × 246 mm	1520 × 238 mm	1298 × 199 mm	1295 × 195 mm	1288 × 187 mm	645 × 335 mm	642 × 330.5 mm	636 × 319 mm
Product thickness	2.2 mm	5 mm	9 mm	2.2 mm	5 mm	9 mm	2.2 mm	5 mm	9 mm
Content / box	14/5.25 m²	6/2.22 m²	6/2.17 m²	20/5.17 m²	8/2.02 m²	8/1.93 m²	22/4.75 m²	10/2.12 m²	9/1.83 m²
Boxes / pallet	56/294.00 m²	48/106.56 m²	48/104.16 m²	60/310.20 m²	56/113.12 m²	44/84.92 m²	66/313.50 m²	52/110.24 m²	60/109.80 m²
Weight	~ 3 kg / m²	~ 9 kg / m²	8.7 kg / m²	~ 3 kg / m²	~ 9 kg / m²	8.7 kg / m²	~ 3 kg / m²	~ 9 kg / m²	8.7 kg / m²
Utilization classes   EN ISO 10874	23/32	23/32	23/32	23/32	23/32	23/32	23/32	23/32	23/32
Staining / chemical resistance EN ISO 26987	very good resistance with regards to concentration and exposure time								
Reaction to fire   EN 13501-1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1
Anti slip category   DIN 51130	R9	R9	R9	R9	R9	R9	R9	R9	R9
Light fastness   EN ISO 105-B02	~ 7	~ 7	~ 7	~ 7	~ 7	~ 7	~ 7	~ 7	~ 7
Residual indentation   EN ISO 24343-1	≤ 0.10 mm	≤ 0.05 mm	≤ 0.05 mm	≤ 0.10 mm	≤ 0.05 mm	≤ 0.05 mm	≤ 0.10 mm	≤ 0.05 mm	≤ 0.05 mm
Dimensional stability   EN ISO 23999	≤ 0.15 %	≤ 0.10 %	-	≤ 0.15 %	≤ 0.10 %	-	≤ 0.15 %	≤ 0.10 %	-
Underfloor heating	Suitable for all conventional hot water underfloor heating and electrical systems regulated up to a surface temperature of 27 °C.								
Thermal resistance   EN 12667	0.01 (m²K) / W	0.01 (m²K) / W	0.06 (m²K) / W	0.01 (m²K) / W	0.01 (m²K) / W	0.06 (m²K) / W	0.01 (m²K) / W	0.01 (m²K) / W	0.06 (m²K) / W
Castor chair test   EN 425 / ISO 4918	type W								
Impact sound reduction   EN ISO 10140	~ 4 dB	~ 6 dB	~ 15 dB	~ 4 dB	~ 6 dB	~ 15 dB	~ 4 dB	~ 6 dB	~ 15 dB
Effect of a furniture leg   EN 424	Foot Type 2 – no damage								
Anti-static properties   EN 1815	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
*Guarantee	en.wineo.de/service/guarantee								



Windmöller GmbH offers a manufacturer's lifetime warranty for PURLINE organic flooring in the residential sector. If an underlay material is used, the warranty is only valid if a recommended wineo PERFECT FIT underlay mat is used. For more information, please visit: [en.wineo.de/service/guarantee](https://en.wineo.de/service/guarantee)

Utilisation class 23:  
Domestic area with  
intensive usage

Utilisation class 32:  
Normal use in the  
commercial sector

wood XL

Elastic

1500 × 250 × 2.2 mm

Elastic

1507 × 246 × 5 mm

Multi-Layer | Rigid

1520 × 238 × 9 mm

stone L

Elastic

645 × 335 × 2.2 mm

Elastic

642 × 330,5 × 5 mm

Multi-Layer | Rigid

636 × 319 × 9 mm

wood L

Elastic

1298 × 199 × 2.2 mm

Elastic

1295 × 195 × 5 mm

Multi-Layer | Rigid

1288 × 187 × 9 mm





## FORWARD THINKING. ALWAYS.

That is why we are constantly working on innovations and products that can do more. In recent years, we have been able to bring several new products to market which can now be found in many households and public buildings. Worldwide.

For generations, Windmüller has been known for its dedication to future development and collaborative partnerships. We impress people, companies and markets all over the world with our flooring ideas, materials and technologies.



"Our products are always as sustainable as current technology allows. And we are getting better at it every day. Because striving for sustainability is what drives us."

**Matthias Windmüller**  
CEO Windmüller GmbH



**MADE IN GERMANY**



**Windmüller GmbH**

Nord-West-Ring 21

D-32832 Augustdorf

Tel.: +49 (0) 52 37 609 - 0

Fax: +49 (0) 52 37 609 - 309

info@wineo.de

**www.wineo.de**

Handed over by:

Member of



**ERFMI.** DGNB



# wineo