

wineo Welding Rod

Welding Rod for hot welding to ensuer a connection between two PURLINE rolls

Welding Rod

Format

Roll

Product thickness

4,0 mm

Weight / g/m

12,4 g

Roll / m

60 m (+1 or -0 m)

Outer Box Roll / Outer Box m

15
900 m

Colors / Designs

available for all wineo 1500 roll designs – www.wineo.de

Classification

Shore D

NF EN ISO 868

38 +/- 3

Diameter

-

4 +/- 0,2 mm

Strength at break

EN ISO 527R

> 5 MPa

Elongation at break

EN ISO 527R

> 70 %

Melting range

ISO 11357-2

60 - 120 °C

Composition

EVAC (Ethylen-Vinylacetat-Copolymere)

Technical resins


Pig quantity – free of heavy metals

Note: No components hazardous to health are emitted from the mixture.

Disposal

Any leftover pieces from installation or assembly can simply be disposed of with household waste. Please dispose of large quantities in accordance with the relevant municipal regulations (e.g. take them to a recycling centre).

Wineo

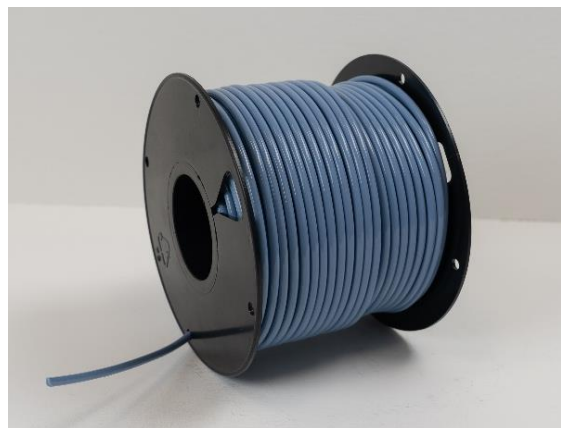

Relevant Information:

When hot welding, use an adapted nozzle for a better weld seam result

Technical subjects can be changed by Windmöller GmbH.