

wineo



ACCESSORIES



**THAT'S
FLOORING**

CONTENT

| | |
|--|-----------|
| Underlay material | 04 |
| Skirting boards | 12 |
| Skirting boards External corners Inside corners Weld rods | 22 |
| Installation tools | 24 |

UNDERLAY MATERIAL PRODUCT FINDER

FOR PURLINE® ORGANIC FLOORING & DESIGN FLOORING

| Installation of | Installation type | Installation | Special feature | Product |
|---|-------------------|--------------|-----------------------------|---------------------|
| wineo PURLINE® organic flooring or design flooring and comparable design floors for gluing and clicking in | for gluing | floating | self-adhesive on one side | singleGLUE |
| | | glued | self-adhesive on both sides | doubleGLUE |
| | | | combined with liquid glue | silentPLUS |
| | for clicking in | floating | for elastic click-floors | silentCOMFORT |
| | | | Rigid-click < 4 mm | silentRIGID COMPACT |
| | | | (Semi-) Rigid-click | silentRIGID |

UNDERLAY MATERIAL PRODUCT FINDER

FOR LAMINATE FLOORING & PARQUET FLOORING

| Installation of | Anforderung | Substrate | Product |
|---|--------------------|-------------------|---|
| laminate flooring or parquet flooring | Underfloor heating | mineral based | soundPROTECT SD |
| | | | soundPROTECT PROFI SD |
| | | non-mineral based | soundPROTECT |
| | | | soundPROTECT PROFI |
| | Heat insulation | mineral based | insulationBOARD + PE vapour barrier |
| | | non-mineral based | insulationBOARD |

PU SELF-ADHESIVE MATS

FOR PURLINE® ORGANIC FLOORING
& DESIGN FLOORING



singleGLUE | Art.-Nr. KPU1020



THE INNOVATIVE SOLUTION

FOR THE FLOATING INSTALLATION
OF ELASTIC FLOOR COVERINGS FOR GLUING,
WITHOUT LIQUID ADHESIVE

- floating installation of plank and sheet material
- self-adhesive top surface, floating installation, ultra-fast
- perfect solution for underfloor heating

Fits to PURLINE® organic flooring & design flooring for gluing:


wineo 400 | 600 | 800 | 1000 | 1200 | 1500
and all comparable elastic dryback floor coverings

The **singleGLUE** is an underlay with a **self-adhesive top surface**. The underlay is **rolled out in a floating arrangement**, i.e. loose on the screed. Once the protective film has been removed, the flooring can be glued on top and is then fixed using a roller. Working without liquid adhesive is extremely clean and installation is **very quick**. Surfaces can be walked on immediately and thanks to the floating installation the flooring can be removed without leaving any residue.

Technical characteristics

| | |
|-------------------------|-----------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 6.5 m ² |
| Thickness: | 1.8 mm |
| Width: | 1 m |
| Length: | 6.5 m |
| Weight: | 2.6 kg / m ² |
| Impact sound reduction: | ~ 15 dB |
| Thermal resistance: | 0.01 (m ² K) / W |

doubleGLUE | Art.-Nr. KPU1050

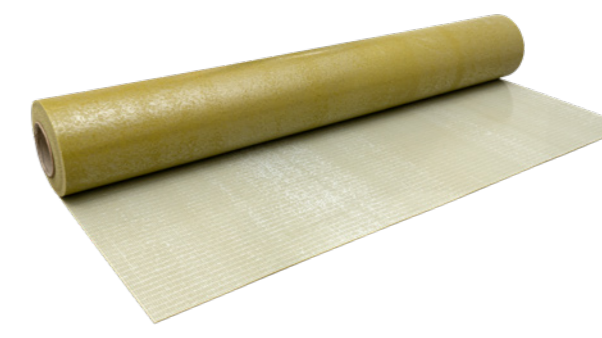

THE STRONG SOLUTION

FOR A DOUBLE-SIDED ADHESION
OF ELASTIC FLOOR COVERINGS FOR GLUING,
WITHOUT LIQUID ADHESIVE

- double-sided installation of plank and sheet material
- suitable for the installation of large areas
- no expansion joints
- perfect solution for underfloor heating

Fits to PURLINE® organic flooring & design flooring for gluing:

wineo 400 | 600 | 800 | 1000 | 1200 | 1500
and all comparable elastic dryback floor coverings

The **doubleGLUE** underlay with a **self-adhesive top- and backside**, is additionally **glued** to the substrate. This strong bonding in many cases allows for the **elimination of expansion joints** between rooms and makes an installation of very large areas possible. Also surfaces can be walked on immediately, other trades do not have to wait.

Technical characteristics


| | |
|-------------------------|-----------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 6.5 m ² |
| Thickness: | 1.8 mm |
| Width: | 1 m |
| Length: | 6.5 m |
| Weight: | 2.6 kg / m ² |
| Impact sound reduction: | ~ 13 dB |
| Thermal resistance: | 0.01 (m ² K) / W |

PU UNDERLAYS

FOR PURLINE® ORGANIC FLOORING
& DESIGN FLOORING



silentPLUS | Art. no. UPU1020

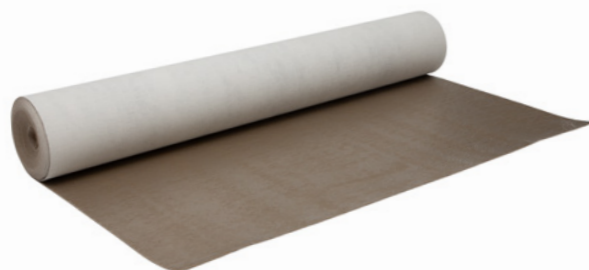

THE PLUS IN QUIETNESS

FOR FULL-SURFACE BONDING
OF ELASTIC FLOOR COVERINGS FOR GLUING

- self-adhesive below, full-surface bonding above, ultra-quiet
- perfect solution for underfloor heating
- up to utilisation class 23/33

Fits to PURLINE® organic flooring & design flooring for gluing: wineo 400 | 600 | 800 | 1000 | 1500
and all comparable elastic dryback floor coverings

silentPLUS is an underlay with a **self-adhesive lower surface**. Once the protective film has been removed, the underlay is stuck to the substrate. The flooring is then fitted with an additional adhesive on the entire upper surface. This double adhesive method reduces impact noise up to 17 dB and guarantees that special bonus of very low noise.

Technical characteristics

| | |
|-------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 8 m ² |
| Thickness: | 2 mm |
| Width: | 1 m |
| Length: | 8 m |
| Weight: | 2 kg/m ² |
| Impact sound reduction: | ~ 17 dB |
| Thermal resistance: | 0.01 (m ² K)/W |

silentCOMFORT | Art. no. UCT1000



THE CONVENIENT MAT

FOR STABLE CLICKING INSTALLATION
OF ELASTIC FLOOR COVERINGS

- adhesive top surface, floating installation, ultra-stable
- perfect solution for underfloor heating

Fits to PURLINE® organic flooring & design flooring for clicking in: wineo 400 | 600 | 800 | 1000
and all comparable elastic dryback floor coverings

silentCOMFORT is the best choice for **floating installation of click flooring**. The **adhesive surface** ensures the click connections of the flooring are stable so that the flooring does not slip on the underlay. **silentCOMFORT** is therefore the most stable underlay for comfortable click installation of elastic flooring.

Technical characteristics

| | |
|-------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 10 m ² |
| Thickness: | 1.5 mm |
| Width: | 1 m |
| Length: | 10 m |
| Weight: | 1.5 kg/m ² |
| Impact sound reduction: | ~ 16 dB |
| Thermal resistance: | 0.01 (m ² K)/W |


PU UNDERLAYS

FOR PURLINE® ORGANIC FLOORING
& DESIGN FLOORING



silentRIGID COMPACT | Art. no. UPU1050

RECOMMENDED USE
FOR THIN RIGID COVERINGS
WITH LESS THAN 4 MM
PRODUCT THICKNESS

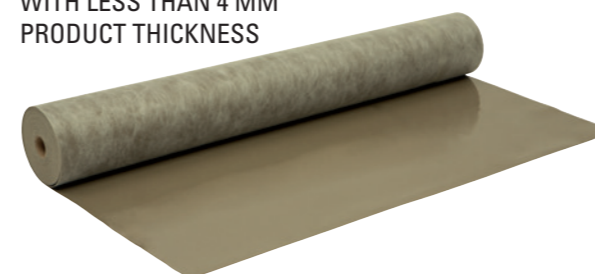

THE MUST-HAVE

FOR THE INSTALLATION
OF RIGID-FLOORS FOR CLICKING IN

- no breaking of the click connection
- super stabilising
- laid as a floating floor

Fits to thin rigid design flooring for clicking in:
with less than 4 mm product thickness


The **silentRIGID COMPACT** is the **perfect underlay for rigid floors with less than 4 mm product thickness**. With these types of products it stabilises click connections which are often weak and reduces walking noise.

Technical characteristics

| | |
|-------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 54 |
| Roll: | 10 m ² |
| Thickness: | 1.0 mm |
| Width: | 1 m |
| Length: | 10 m |
| Weight: | 1.2 kg/m ² |
| Impact sound reduction: | ~ 12 dB |
| Thermal resistance: | 0.01 (m ² K)/W |

silentRIGID | Art. no. UPU1030

RECOMMENDED USE
FOR RIGID COVERINGS

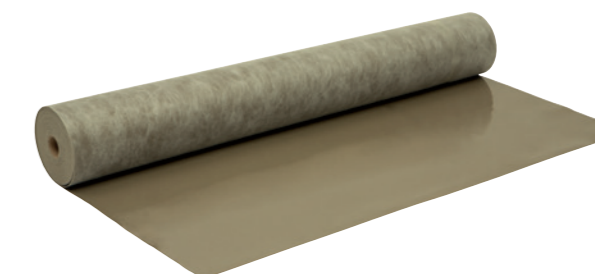

THE MUST-HAVE

FOR THE INSTALLATION
OF RIGID-FLOORS FOR CLICKING IN

- no breaking of the click connection
- super stabilising
- laid as a floating floor

Fits to (semi-) rigid design flooring for clicking in: wineo 600 | 1200
and any comparable rigid design flooring

The **silentRIGID** was specially developed for **rigid floors in the premium sector**. With these types of products it stabilises click connections which are often weak and reduces walking noise.


Technical characteristics

| | |
|-------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 54 |
| Roll: | 9 m ² |
| Thickness: | 1.2 mm |
| Width: | 1 m |
| Length: | 9 m |
| Weight: | 1.5 kg/m ² |
| Impact sound reduction: | ~ 13 dB |
| Thermal resistance: | 0.01 (m ² K)/W |

PU UNDERLAYS FOR LAMINATE FLOORING & PARQUET FLOORING



soundPROTECT | Art. no. UPU200

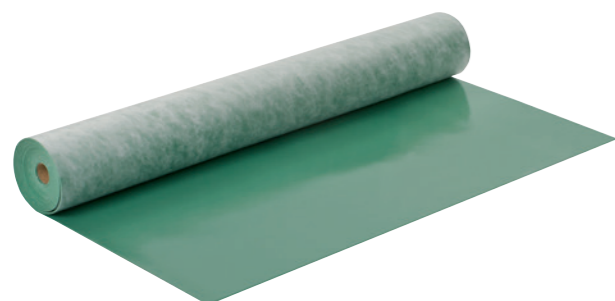

**THE ALL-ROUNDER
WITH LONG-LIFE PERFORMANCE**
2 mm


- ultra-quiet, efficient, for a stable click connection
- perfect solution for underfloor heating, suitable for non-mineral substraces (a vapour barrier must be used with mineral substraces)

Fits to all comparable standard laminate and parquet products

soundPROTECT is the perfect **2 mm underlay for laminate and parquet flooring**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

| Technical characteristics | |
|---------------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 8 m ² |
| Thickness: | 2 mm |
| Width: | 1 m |
| Length: | 8 m |
| Weight: | 1.7 kg/m ² |
| Impact sound reduction: | ~ 19 dB |
| Reflected walking sound: | ~ 28 % |
| Thermal resistance: | 0.01 (m ² K)/W |

soundPROTECT SD | Art. no. UPU200SD

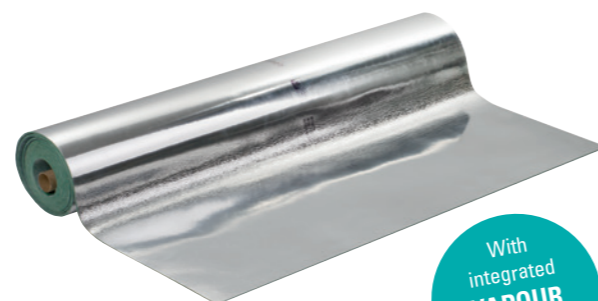

With
integrated
**VAPOUR
BARRIER**

**THE ALL-ROUNDER
WITH LONG-LIFE PERFORMANCE**
2 mm

- ultra-quiet, efficient, for a stable click connection
- suitable for mineral substraces (such as screed) thanks to integrated vapour barrier
- perfect solution for underfloor heating

Fits to all comparable standard laminate and parquet products


soundPROTECT SD is the perfect **2 mm underlay for laminate and parquet flooring with integrated vapour barrier**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

| Technical characteristics | |
|---------------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 8 m ² |
| Thickness: | 2 mm |
| Width: | 1 m |
| Length: | 8 m |
| Weight: | 1.7 kg/m ² |
| Impact sound reduction: | ~ 19 dB |
| Reflected walking sound: | ~ 28 % |
| Thermal resistance: | 0.01 (m ² K)/W |
| SD value: | > 75 m |

PU UNDERLAYS FOR LAMINATE FLOORING & PARQUET FLOORING



soundPROTECT PROFI | Art. no. UPU100

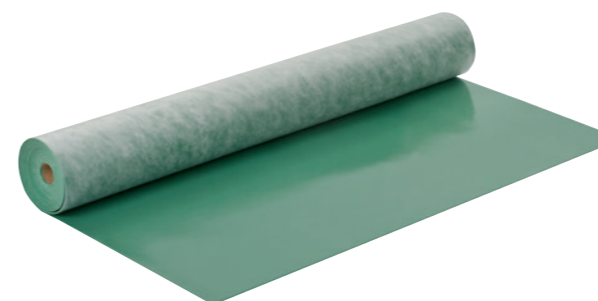

**THE ALL-ROUNDER FOR PROFESSIONALS
WITH LONG-LIFE PERFORMANCE**
3 mm


- ultra-quiet, efficient, for a stable click connection
- perfect solution for underfloor heating, suitable for non-mineral substraces (a vapour barrier must be used with mineral substrates)

Fits to all comparable standard laminate and parquet products

soundPROTECT PROFI is the perfect **3 mm underlay for laminate and parquet flooring**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

| Technical characteristics | |
|---------------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 5.5 m ² |
| Thickness: | 3 mm |
| Width: | 1 m |
| Length: | 5.5 m |
| Weight: | 2.8 kg/m ² |
| Impact sound reduction: | ~ 20 dB |
| Reflected walking sound: | ~ 31 % |
| Thermal resistance: | 0.01 (m ² K)/W |

soundPROTECT PROFI SD | Art. no. UPU100SD

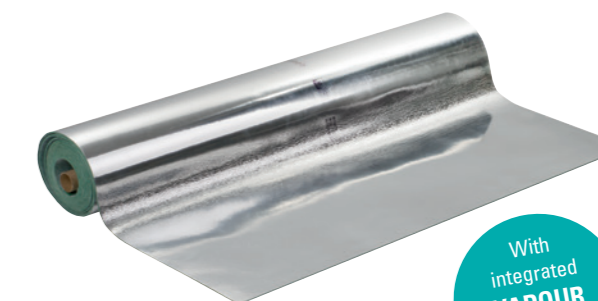

With
integrated
**VAPOUR
BARRIER**

**THE ALL-ROUNDER FOR PROFESSIONALS
WITH LONG-LIFE PERFORMANCE**
3 mm

- ultra-quiet, efficient, for a stable click connection
- suitable for mineral substraces (such as screed) thanks to integrated vapour barrier
- perfect solution for underfloor heating

Fits to all comparable standard laminate and parquet products

soundPROTECT PROFI SD is the perfect **3 mm underlay for laminate and parquet flooring with integrated vapour barrier**. It ensures maximum reduction in impact and reflected walking sound levels, stable retention of the click connection, and is extremely durable.

| Technical characteristics | |
|---------------------------------|---------------------------|
| Base material: | ecuran (bio-polyurethane) |
| Rolls/pallets: | 40 |
| Roll: | 5.5 m ² |
| Thickness: | 3 mm |
| Width: | 1 m |
| Length: | 5.5 m |
| Weight: | 2.8 kg/m ² |
| Impact sound reduction: | ~ 20 dB |
| Reflected walking sound: | ~ 31 % |
| Thermal resistance: | 0.01 (m ² K)/W |
| SD value: | > 75 m |



BEST INGREDIENTS FOR BEST RESULTS

The basis of wineo PU underlays and PU self-adhesive mats is ecuran, the unique bio-polyurethane from Windmöller. ecuran is based on plant oils such as canola or castor oil and naturally occurring mineral components such as chalk.



Canola or castor oil



Chalk

Made with




PU underlays made of ecuran

- fast, energy-efficient distribution of ground heat
- excellent noise reduction with hard and soft floor coverings
- long-life performance of at least 30 years
- excellent residual indentation behaviour
- sustainable raw materials
- without the addition of chlorine, plasticisers or solvents

FIBREBOARD FOR LAMINATE FLOORING & PARQUET FLOORING

insulationBOARD | Art. no. UHF100

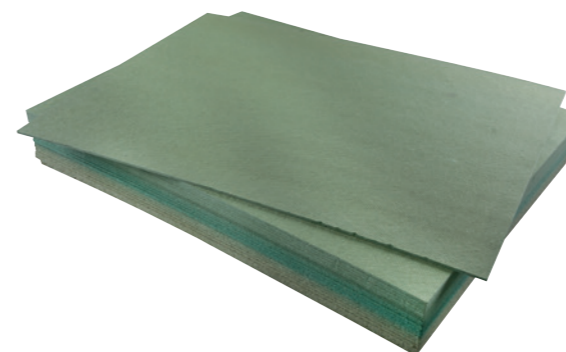

THE STRONG INSULATION BOARD FOR PROFESSIONALS

- very good heat insulation, height compensation up to approx. 3 mm, high durability

Fits to all comparable standard laminate and parquet products

insulationBOARD has a proven track record with installation professionals as a **heat insulation underlay**. The insulating board has very good compensation characteristics and is very durable.

Technical characteristics

| | |
|--------------------------|-------------------------------|
| Material: | Fibreboard |
| Boxes / pallets: | 26 |
| Quantity / box: | 15 pieces (7 m ²) |
| Thickness: | 5 mm |
| Width: | 0.59 m |
| Length: | 0.79 m |
| Weight: | 1.28 kg/m ² |
| Impact sound reduction: | ~ 19 dB |
| Reflected walking sound: | 11 % |
| Thermal resistance: | 0.071 (m ² K)/W |

PE FILM & MULTI-PURPOSE SEALING TAPE FOR LAMINATE FLOORING & PARQUET FLOORING

PE vapour barrier | Art. no. UZUB200



- thin PE film for use under all hard flooring (not required for wood substrates)
- provides a separating layer between screed and underlay materials
- certified to B2


Fits to:

soundPROTECT, soundPROTECT PROFI, insulationBOARD

Technical characteristics

| | |
|------------------|-------------------|
| Rolls / pallets: | 100 |
| Roll: | 30 m ² |
| Thickness: | 0.125 mm |
| Width: | 1 m |
| Length: | 30 m |

Multi-purpose sealing tape | Art. no. UZUB110



- special adhesive tape for sealing the edges of underlay
- required for all underlays with integrated vapour barrier

Fits to:

soundPROTECT SD, soundPROTECT PROFI SD

Technical characteristics

| | |
|---------|-------|
| Roll: | 1 |
| Width: | 38 mm |
| Length: | 20 m |

SKIRTING BOARDS



www.blauer-engel.de/uz176

Contrast | Art.-Nr. F01CT60



60 x 16 x 2380 mm

MDF material | Unit = 4

Unity



- for the majority of our wineo floorings we offer skirtings similar to the decor, p. 14-22
- for skirtings not listed, we recommend F01CT6

Classic | Art.-Nr. F01CS80



80 x 18 x 2380 mm

MDF material | Unit = 4

Hamburg | Art.-Nr. F01HB80



80 x 18 x 2380 mm

MDF material | Unit = 4

Design | Art.-Nr. F01DS80



80 x 18 x 2380 mm

MDF material | Unit = 4

SKIRTING BOARD ACCESSORIES

SKIRTING CLIPS

Skirting clips | Art.-Nr. FCLIPK



- invisible skirting board fixings

ca. 20 cm | box = 50 clips

SKIRTING BOARD ACCESSORIES

INSIDE AND EXTERNAL CORNERS | END CAPS | CONNECTION PIECES

Fits to: Contrast skirting board



| Type (self-adhesive) | Unit | Colour | Art. no. |
|----------------------|------|--------|----------|
| Inside corners | 4 | White | FIE01-60 |
| External corners | 2 | White | FAE01-60 |
| End caps | 2 | White | FAK01-60 |
| Connection pieces | 2 | White | FCP01-60 |

Fits to: Design skirting board



| Type (self-adhesive) | Unit | Colour | Art. no. |
|----------------------|------|--------|----------|
| Inside corners | 4 | White | FIE01-80 |
| External corners | 2 | White | FAE01-80 |
| End caps | 2 | White | FAK01-80 |
| Connection pieces | 2 | White | FCP01-80 |

Fits to: Hamburger 80 skirting board



| Type (self-adhesive) | Unit | Colour | Art. no. |
|----------------------|------|--------|-----------|
| Inside corners | 4 | White | FIE01-80H |
| External corners | 2 | White | FAE01-80H |
| End caps | 2 | White | FAK01-80H |
| Connection pieces | 2 | White | FCP01-80H |

SKIRTING BOARDS

FOR PURLINE® ORGANIC FLOORING


www.blauer-engel.de/uz176


wineo 1000

| Design | Fits to (Decor art. no.) | 16/60 Art. no. |
|-----------------------|-----------------------------|-------------------|
| Calm Oak Ash | PL308R PLC308R MLP308R | F01CT60 (white) |
| Calm Oak Bright | PL305R PLC305R MLP305R | F6010114 |
| Calm Oak Mocca | PL307R PLC307R MLP307R | F01CT60 (white) |
| Calm Oak Shell | PL306R PLC306R MLP306R | F6010155 |
| Comfort Oak Sand | PL298R PLC298R MLP298R | F6010126 |
| Intensive Oak Caramel | PL300R PLC300R MLP300R | F6010131 |
| Intensive Oak Honey | PL299R PLC299R MLP299R | F6010136 |
| Light Maple Cream | PL296R PLC296R MLP296R | F01CT60 (white) |
| Natural Pine Beach | PL297R PLC297R MLP297R | F01CT60 (white) |
| Noble Oak Chocolate | PL312R PLC312R MLP312R | F6010116 |
| Noble Oak Powder | PL309R PLC309R MLP309R | F6010114 |
| Noble Oak Toffee | PL311R PLC311R MLP311R | F6010143 |
| Noble Oak Vanilla | PL310R PLC310R MLP310R | F6010124 |
| Rustic Oak Coffee | PL316R PLC316R MLP316R | F6010108 |
| Rustic Oak Ginger | PL314R PLC314R MLP314R | F6010122 |
| Rustic Oak Nougat | PL315R PLC315R MLP315R | F6010116 |
| Rustic Oak Taupe | PL313R PLC313R MLP313R | F01CT60 (white) |
| Soft Oak Pepper | PL304R PLC304R MLP304R | F01CT60 (white) |
| Soft Oak Salt | PL295R PLC295R MLP295R | F01CT60 (white) |
| Soft Oak Silver | PL302R PLC302R MLP302R | F01CT60 (white) |
| Strong Oak Cappuccino | PL303R PLC303R MLP303R | F01CT60 (white) |
| Strong Oak Cinnamon | PL301R PLC301R MLP301R | F6010112 |

SKIRTING BOARDS

FOR PURLINE® ORGANIC FLOORING


www.blauer-engel.de/uz176


wineo 1200

| Design | Fits to (Decor art. no.) | 16/60 Art. no. |
|------------------|-----------------------------|-------------------|
| Announcing Fritz | PL271R PLC271R MLP271R | F6010136 |
| Call me Tilda | PL086R PLC086R MLP086R | F6010121 |
| Cheer for Lisa | PL097R PLC097R MLP097R | F6010153 |
| Hello Martha | PL076R PLC076R MLP076R | F6010101 |
| Let's go Max | PL270R PLC270R MLP270R | F6010118 |
| Say hi to Klara | PL272R PLC272R MLP272R | F6010147 |
| Smile for Emma | PL084R PLC084R MLP084R | F6010105 |
| Welcome Oskar | PL269R PLC269R MLP269R | F6010155 |

SKIRTING BOARDS

FOR PURLINE® ORGANIC FLOORING



www.blauer-engel.de/uz176



wineo 1500

| Design | Fits to (Decor art. no.) | 16/60 Art. no. |
|----------------------|-----------------------------|-------------------|
| Aspen Oak Dark | PL15000WL | F6010121 |
| Canyon Oak Honey | PL15200WXL | F6010101 |
| Canyon Oak Sand | PL15001WL | F6010120 |
| Crafted Oak | PL15201WXL | F6010101 |
| Durban Oak Brown | PL15002WL | F6010137 |
| Durban Oak Taupe | PL15003WL | F6010138 |
| Fine Oak Brown | PL15202WXL | F6010129 |
| Fine Oak Light | PL15203WXL | F6010134 |
| Fine Oak Nature | PL15204WXL | F6010106 |
| Fjord Maple Beige | PL15205WXL | F01CT60 (white) |
| Fractal Dark | PL15600GXL | F01CT60 (white) |
| Fractal Ecru | PL15601GXL | F01CT60 (white) |
| Fractal Grey | PL15602GXL | F01CT60 (white) |
| Fractal Light | PL15603GXL | F01CT60 (white) |
| Fractal Opus | PL15604GXL | F01CT60 (white) |
| Fractal Wave | PL15605GXL | F01CT60 (white) |
| Iceland Pine Light | PL15004WL | F6010132 |
| Intensive Oak Amber | PL15206WXL | F6010124 |
| Intensive Oak Brown | PL15207WXL | F6010102 |
| Intensive Oak Nature | PL15208WXL | F6010115 |
| Intensive Oak Taupe | PL15209WXL | F6010104 |
| Lodge Oak Brown | PL15005WL | F6010112 |
| Lodge Oak Dark | PL15006WL | F6010137 |
| Loft Concrete Dark | PL15400SXL | F01CT60 (white) |
| Loft Concrete Grey | PL15401SXL | F01CT60 (white) |
| Lugano Walnut Brown | PL15210WXL | F6010108 |
| Mayfield Oak Beige | PL15211WXL | F6010145 |
| Mayfield Oak Brown | PL15212WXL | F6010120 |
| Mayfield Oak Nature | PL15213WXL | F6010124 |
| Mayfield Oak Taupe | PL15214WXL | F6010123 |
| Melbourne Oak Brown | PL15222WXL | F6010108 |

SKIRTING BOARDS

FOR PURLINE® ORGANIC FLOORING



www.blauer-engel.de/uz176



wineo 1500

| Design | Fits to (Decor art. no.) | 16/60 Art. no. |
|--------------------------|-----------------------------|-------------------|
| Melbourne Oak Natural | PL15223WXL | F6010149 |
| Metropolitan Marble Dark | PL15402SXL | F01CT60 (white) |
| Modern Stone Dark | PL15403SXL | F01CT60 (white) |
| Modern Stone Grey | PL15404SXL | F01CT60 (white) |
| Newport Oak Brown | PL15007WL | F6010101 |
| Newport Oak Natural | PL15008WL | F6010106 |
| Olevano Marble Grey | PL15405SXL | F01CT60 (white) |
| Oxford Denim | PL15500TXL | F01CT60 (white) |
| Oxford Flint | PL15505TXL | F01CT60 (white) |
| Oxford Ocean | PL15501TXL | F01CT60 (white) |
| Oxford Oyster | PL15502TXL | F01CT60 (white) |
| Oxford Slate | PL15503TXL | F01CT60 (white) |
| Oxford Steel | PL15504TXL | F01CT60 (white) |
| Portland Concrete Dark | PL15406SXL | F01CT60 (white) |
| Portland Concrete Grey | PL15407SXL | F01CT60 (white) |
| Portland Concrete Light | PL15408SXL | F01CT60 (white) |
| Ravenna Oak Beige | PL15009WL | F6010111 |
| Ravenna Oak Brown | PL15010WL | F6010122 |
| Ravenna Oak Nature | PL15215WXL | F6010122 |
| Real Oak Amber | PL15216WXL | F6010118 |
| Real Oak Nature | PL15217WXL | F6010143 |
| Real Oak Taupe | PL15218WXL | F6010126 |
| Serene Marble Dark | PL15411SXL | F01CT60 (white) |
| Serene Marble Grey | PL15412SXL | F01CT60 (white) |
| Serene Marble Light | PL15409SXL | F01CT60 (white) |
| Serene Marble Nature | PL15410SXL | F01CT60 (white) |
| Siena Oak Beige | PL15219WXL | F6010145 |
| Siena Oak Brown | PL15220WXL | F6010135 |
| Siena Oak Honey | PL15221WXL | F6010143 |
| Siena Oak Nature | PL15011WL | F6010115 |
| Venice Terrazzo Grey | PL15413SXL | F01CT60 (white) |

SKIRTING BOARDS FOR DESIGN FLOORING


www.blauer-engel.de/uz176


wineo 400

| Design | Fits to (Decor art. no.) | 16/60 Art. no. |
|------------------------|--|-------------------|
| Authentic Oak Brown | DB296WXL RLC296WXL MLD296WXL | F6010122 |
| Balanced Oak Brown | DB285WXS DB285WL RLC285WL MLD285WL | F6010113 |
| Balanced Oak Grey | DB287WL RLC287WL MLD287WL | F6010128 |
| Balanced Oak Lightgrey | DB286WXS DB286WL RLC286WL MLD286WL | F6010153 |
| Calm Ash Beige | DB290WXL RLC290WXL MLD290WXL | F6010140 |
| Coast Pine Greige | DB280WL RLC280WL MLD280WL | F6010132 |
| Coast Pine Taupe | DB284WL RLC284WL MLD284WL | F6010119 |
| Comfort Oak Brown | DB293WXL RLC293WXL MLD293WXL | F6010110 |
| Comfort Oak Dark | DB299WXL RLC299WXL MLD299WXL | F6010121 |
| Comfort Oak Mellow | DB129WXL RLC129WXL MLD129WXL | F6010102 |
| Comfort Oak Nature | DB291WXL RLC291WXL MLD291WXL | F6010110 |
| Comfort Oak Taupe | DB300WXL RLC300WXL MLD300WXL | F6010148 |
| Cool Walnut Dark | DB298WXL RLC298WXL MLD298WXL | F6010121 |
| Country Oak Nature | DB294WXL RLC294WXL MLD294WXL | F6010124 |
| Easy Oak Greige | DB288WXL RLC288WXL MLD288WXL | F6010151 |
| Joy Oak Tender | DB126WXL RLC126WXL MLD126WXL | F6010107 |
| Limed Oak Silver | DB301WXL RLC301WXL MLD301WXL | F6010123 |
| Nordic Maple Cream | DB289WXL RLC289WXL MLD289WXL | F6010140 |
| Plain Oak Beige | DB281WXS DB281WL RLC281WL MLD281WL | F6010155 |
| Shadow Oak Brown | DB295WXL RLC295WXL MLD295WXL | F6010108 |
| Shadow Oak Nature | DB292WXL RLC292WXL MLD292WXL | F6010154 |
| Vibrant Oak Beige | DB282WL RLC282WL MLD282WL | F6010139 |
| Vintage Oak Brown | DB297WXL RLC297WXL MLD297WXL | F6010109 |
| Vivid Oak Nature | DB283WXS DB283WL RLC283WL MLD283WL | F6010112 |

SKIRTING BOARDS FOR DESIGN FLOORING


www.blauer-engel.de/uz176


wineo 600

| Design | Fits to (Decor art. no.) | 16/60 Art. no. |
|------------------|-----------------------------|-------------------|
| #AmsterdamLoft | DB195W6 RLC195W6 | F6010112 |
| #BarcelonaLoft | DB191W6 RLC191W6 | F6010134 |
| #BerlinLoft | DB200W6 RLC200W6 | F6010150 |
| #BrooklynFactory | DB206W6 RLC206W6 | F01CT60 (white) |
| #CamdenFactory | DB202W6 RLC202W6 | F01CT60 (white) |
| #ChelseaFactory | DB203W6 RLC203W6 | F01CT60 (white) |
| #CopenhagenLoft | DB189W6 RLC189W6 | F6010132 |
| #CozyPlace | DB186W6 RLC186W6 | F6010130 |
| #ElegantPlace | DB187W6 RLC187W6 | F6010123 |
| #LisbonLoft | DB192W6 RLC192W6 | F6010107 |
| #LondonLoft | DB193W6 RLC193W6 | F6010149 |
| #MilanoLoft | DB190W6 RLC190W6 | F6010141 |
| #ModernPlace | DB188W6 RLC188W6 | F01CT60 (white) |
| #MoscowLoft | DB198W6 RLC198W6 | F6010135 |
| #NaturalPlace | DB183W6 RLC183W6 | F6010154 |
| #NewtownFactory | DB204W6 RLC204W6 | F01CT60 (white) |
| #NewYorkLoft | DB197W6 RLC197W6 | F6010137 |
| #NoordFactory | DB201W6 RLC201W6 | F01CT60 (white) |
| #ParisLoft | DB199W6 RLC199W6 | F6010105 |
| #SmoothPlace | DB185W6 RLC185W6 | F6010126 |
| #SoHoFactory | DB205W6 RLC205W6 | F01CT60 (white) |
| #SydneyLoft | DB194W6 RLC194W6 | F6010112 |
| #ViennaLoft | DB196W6 RLC196W6 | F6010102 |
| #WarmPlace | DB184W6 RLC184W6 | F6010149 |

SKIRTING BOARDS FOR DESIGN FLOORING


www.blauer-engel.de/uz176



wineo 800

| Design | Fits to (Decor art. no.) | 16/60 Art. no. |
|-------------------------|-----------------------------|-------------------|
| Bergamo Walnut Dark | DB840WXL MLD840WXL | F01CT60 (white) |
| Bergen Marble Grey | DB853SXL | F01CT60 (white) |
| Bradford Oak Honey | DB835WXL MLD835WXL | F6010154 |
| Catania Pine Grey | DB841WXL MLD841WXL | F6010152 |
| Chicago Concrete Dark | DB852SXL | F01CT60 (white) |
| Clifton Oak Brown | DB822WL | F6010116 |
| Dalen Oak Lightgrey | DB830WXL MLD830WXL | F6010132 |
| Dalen Oak Nature | DB834WXL MLD834WXL | F6010154 |
| Dublin Oak Brown | DB838WXL MLD838WXL | F6010122 |
| Lundby Maple Beige | DB831WXL MLD831WXL | F01CT60 (white) |
| Malmö Oak Beige | DB832WXL MLD832WXL | F6010115 |
| Merano Oak Brown | DB819WL | F6010129 |
| Merano Oak Nature | DB818WL | F6010124 |
| Narvik Oak Nature | DB836WXL MLD836WXL | F6010144 |
| Palermo Oak Brown | DB837WXL MLD837WXL | F6010126 |
| Romo Concrete Lightgrey | DB850SXL | F01CT60 (white) |
| Sheffield Concrete Grey | DB851SXL | F01CT60 (white) |
| Stavanger Oak Brown | DB839WXL MLD839WXL | F6010108 |
| Stavanger Oak Nature | DB833WXL MLD833WXL | F6010141 |
| Stockholm Oak Brown | DB820WL | F6010126 |
| Stockholm Oak Taupe | DB816WL | F6010111 |
| Trondheim Oak Brown | DB817WL | F6010107 |
| Visby Oak Cream | DB815WL | F01CT60 (white) |
| York Oak Brown | DB821WL | F6010137 |



SKIRTING BOARDS | EXTERNAL CORNERS | INSIDE CORNERS | WELD RODS

- available for all wineo 1500 roll designs
- uniform rounding due to machine-finished reinforcement
- very robust – no additional supporting profile
- high stability in corner area, no maintenance joint
- elastic material compensates screed sink
- practical skirting dimensions from 2.40m long – no customising of strips
- flush thresholds guaranteed
- materials do not need to be heated during installation
- no additional templates required
- order-specific article

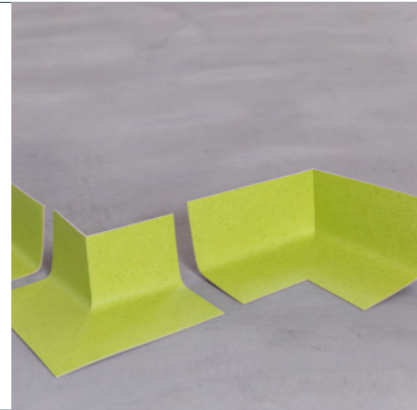

| Technical characteristics | Skirting boards | External corners | Inside corners | Welding rods |
|---------------------------|-----------------|------------------|-----------------|--------------|
| Height | 100 mm | 100 mm | 100 mm | 4 mm |
| Width | 100 mm | 100 mm | 100 mm | 4 mm |
| Length | 2400 mm | 230 mm per site | 210 mm per site | 60 m / Roll |

| Design | Fits to | Skirting board | External corner | Inside corner | Welding rods |
|---------------------|-----------|----------------|-----------------|---------------|--------------|
| Almond Beige | PLR375C | | PEA375 | PEI375 | PS375 |
| Aloe Green | PLR380C | | PEA380 | PEI380 | PS380 |
| Apple Green | PLR185C | | PEA185 | PEI185 | PS185 |
| bright.one | PLR115C | | PEA115 | PEI115 | PS115 |
| bright.two | PLR116C | | PEA116 | PEI116 | PS116 |
| bright.three | PLR117C | | PEA117 | PEI117 | PS117 |
| bright.four | PLR118C | | PEA118 | PEI118 | PS118 |
| Cherry Red | PLR387C | | PEA387 | PEI387 | PS387 |
| Chocolate Brown | PLR384C | | PEA384 | PEI384 | PS384 |
| cool.one | PLR107C | | PEA107 | PEI107 | PS107 |
| cool.two | PLR108C | | PEA108 | PEI108 | PS108 |
| cool.three | PLR109C | | PEA109 | PEI109 | PS109 |
| cool.four | PLR110C | | PEA110 | PEI110 | PS110 |
| Cotton Beige | PLR383C | | PEA383 | PEI383 | PS383 |
| Durban Oak Brown | PLR392C | | PEA392 | PEI392 | PS392 |
| Durban Oak Taupe | PLR391C | | PEA391 | PEI391 | PS391 |
| Fine Oak Brown | PLR15202W | | PEA15202 | PEI15202 | PS15202 |
| Fine Oak Light | PLR15203W | | PEA15203 | PEI15203 | PS15203 |
| Fountain Blue | PLR376C | | PEA376 | PEI376 | PS376 |
| Halifax Oak Brown | PLR390C | | PEA390 | PEI390 | PS390 |
| Halifax Oak Natural | PLR389C | | PEA389 | PEI389 | PS389 |

| Design | Fits to | Skirting board | External corner | Inside corner | Welding rods |
|-----------------------|-----------|----------------|-----------------|---------------|--------------|
| Honey Mustard | PLR128C | | PEA128 | PEI128 | PS128 |
| Jade Green | PLR373C | | PEA373 | PEI373 | PS373 |
| Light Grey | PLR021C | | PEA021 | PEI021 | PS021 |
| Mayfield Oak Nature | PLR15213W | | PEA15213 | PEI15213 | PS15213 |
| Mayfield Oak Taupe | PLR15214W | | PEA15214 | PEI15214 | PS15214 |
| Melange | PLR003C | | PEA003 | PEI003 | PS003 |
| Melbourne Oak Brown | PLR396C | | PEA396 | PEI396 | PS396 |
| Melbourne Oak Natural | PLR395C | | PEA395 | PEI395 | PS395 |
| Napa Walnut Brown | PLR136C | | PEA136 | PEI136 | PS136 |
| Napa Walnut Rust | PLR388C | | PEA388 | PEI388 | PS388 |
| Navi Blue | PLR129C | | PEA129 | PEI129 | PS129 |
| Newport Oak Brown | PLR394C | | PEA394 | PEI394 | PS394 |
| Newport Oak Natural | PLR393C | | PEA393 | PEI393 | PS393 |
| Ocean Blue | PLR381C | | PEA381 | PEI381 | PS381 |
| Powder Rose | PLR374C | | PEA374 | PEI374 | PS374 |
| Pure White | PLR025C | | PEA025 | PEI025 | PS025 |
| pure.one | PLR111C | | PEA111 | PEI111 | PS111 |
| pure.two | PLR112C | | PEA112 | PEI112 | PS112 |
| pure.three | PLR113C | | PEA113 | PEI113 | PS113 |
| pure.four | PLR114C | | PEA114 | PEI114 | PS114 |
| Royal Blue | PLR385C | | PEA385 | PEI385 | PS385 |
| Rust Brown | PLR382C | | PEA382 | PEI382 | PS382 |
| Siena Oak Brown | PLR15220W | | PEA15220 | PEI15220 | PS15220 |
| Siena Oak Honey | PLR15221W | | PEA15221 | PEI15221 | PS15221 |
| Silver Grey | PLR022C | | PEA022 | PEI022 | PS022 |
| Springtime Orange | PLR378C | | PEA378 | PEI378 | PS378 |
| Steel Grey | PLR023C | | PEA023 | PEI023 | PS023 |
| Summer Sky | PLR014C | | PEA014 | PEI014 | PS014 |
| Sunshine Yellow | PLR377C | | PEA377 | PEI377 | PS377 |
| Tropical Orange | PLR386C | | PEA386 | PEI386 | PS386 |
| warm.one | PLR119C | | PEA119 | PEI119 | PS119 |
| warm.two | PLR120C | | PEA120 | PEI120 | PS120 |
| warm.three | PLR121C | | PEA121 | PEI121 | PS121 |
| warm.four | PLR122C | | PEA122 | PEI122 | PS122 |
| Wheat Brown | PLR379C | | PEA379 | PEI379 | PS379 |


INSTALLATION TOOLS

Rubber hammer | Art. no. 20021004



- the essential tool for professionals – the rubber hammer

Assembly aid pro | Art. no. 10030652

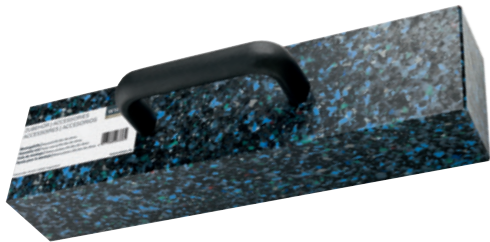

- with practical handle – makes installing click-in flooring easier

Blue Marlin knife | Art. no. 20021003



- the professional knife for installing flooring (supplied without blade)

Assembly aid | Art. no. 10030657



- solid wood, improves installation of elastic flooring for clicking-in





Windmüller GmbH
info@wineo.de
www.wineo.de

Member of

FEB **ERFMI** **DGNB**

